

N O T I C E

THIS DOCUMENT HAS BEEN REPRODUCED FROM
MICROFICHE. ALTHOUGH IT IS RECOGNIZED THAT
CERTAIN PORTIONS ARE ILLEGIBLE, IT IS BEING RELEASED
IN THE INTEREST OF MAKING AVAILABLE AS MUCH
INFORMATION AS POSSIBLE

R79-2

FEBRUARY 1979

(NASA-CR-160348) ELECTROMECHANICAL FLIGHT
CONTROL ACTUATOR Final Report (Delco
Electronics, Santa Barbara, Calif.) 129 p
HC A07/MF A01

CSCL 01C

G3/08

Unclass
39649

NASA CR-

N80-10224

160348



FINAL REPORT ON THE

ELECTROMECHANICAL FLIGHT CONTROL ACTUATOR

CONTRACT NAS 9-14952
MODIFICATION NO. FIVE (5S)

Submitted to

NATIONAL AERONAUTICS and SPACE ADMINISTRATION
L.B. Johnson Space Center
Houston, Texas



Delco Electronics

General Motors Corporation
- Santa Barbara Operations
Santa Barbara, California

R79-2
FEBRUARY 1979

FINAL REPORT ON THE
**ELECTROMECHANICAL
FLIGHT CONTROL ACTUATOR**

CONTRACT NAS 9-14952
MODIFICATION NO. FIVE (5S)

Submitted to
NATIONAL AERONAUTICS and SPACE ADMINISTRATION
L.B. Johnson Space Center
Houston, Texas



Delco Electronics

*General Motors Corporation
- Santa Barbara Operations
Santa Barbara, California*

TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
I	INTRODUCTION	1-1
II	CONCLUSIONS AND RECOMMENDATIONS	2-1
	2.1 Conclusions	2-1
	2.2 Recommendations	2-2
III	SYSTEM FUNCTIONAL DESCRIPTION	3-1
	3.1 EMA Functional Description	3-1
	3.1.1 System Operation	3-2
	3.1.2 Current Source Power Converter	3-4
	3.2 Power Converter Functional Description	3-6
	3.2.1 Motoring Operation	3-6
	3.2.2 Regenerative Braking	3-7
IV	EQUIPMENT DESCRIPTION	4-1
	4.1 Motor-Gearbox Assembly	4-1
	4.1.1 Motor	4-5
	4.1.2 Shaft Encoder	4-9
	4.1.3 Gearbox	4-10
	4.1.4 Tachometer	4-11
	4.1.5 Position Transducer	4-12
	4.2 Electronics	4-12
	4.2.1 Power Electronics	4-13
	4.2.2 Low-Level Electronics	4-15
V	EQUIPMENT MECHANIZATION	5-1
	5.1 Electromechanical Actuator	5-1
	5.1.1 Current Command Rate Limiter	5-1
	5.2 Power Electronics Mechanization	5-8
	5.2.1 High Power Motor Driver	5-8
	5.2.2 Base Driver Power Supply	5-10
	5.2.3 Base Driver Circuit	5-12
	5.3 Power Converter Control	5-12
	5.3.1 Current Protection	5-14

TABLE OF CONTENTS (cont'd)

<u>Section</u>		<u>Page</u>
	5.3.2 Chopper Control	5-14
	5.3.3 Rotor Position Sensor/Tachometer	5-15
	5.3.4 Monitoring Points and Controls	5-22
VI	EMA OPERATING INSTRUCTIONS	6-1
	6.1 Safety Considerations	6-1
	6.2 Start-Up Operations	6-2
	6.2.1 Cooling Air	6-2
	6.2.2 Input Command Signal	6-3
	6.2.3 Turnon	6-3
	6.3 Shutdown Operations	6-3
VII	TESTS AND TEST RESULTS	7-1
	7.1 Introduction	7-1
	7.2 Motor Performance Tests	7-1
	7.2.1 Commutation Angle Control Tests	7-1
	7.2.2 Full Power Motoring Tests	7-4
	7.2.3 Motor Torque Characteristic Tests	7-4
	7.2.4 Motoring Tests	7-4
	7.2.5 Regeneration Tests	7-8
	7.2.6 EMA Torque Control Tests	7-8
	7.2.7 Motor Speed Anomaly	7-11
	7.3 Servo Performance Tests	7-11
	7.3.1 Frequency Response Tests	7-11
	7.3.2 Step Response Tests	7-17
	7.3.3 Linearity Tests	7-35
	7.3.4 Hysteresis Tests	7-38
	7.3.5 Threshold Tests	7-38
	7.3.6 Output Velocity Test	7-41
	7.3.7 Position Null Test	7-43
	Appendix: System Schematics	A-1

LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1-1	Four-Channel Electromechanical Actuator Block Diagram	1-2
3-1	Idealized Motor Phase Currents	3-2
3-2	Simplified Block Diagram of the EMA	3-3
3-3	Controller Block Diagram	3-4
3-4	Typical Power Converter Waveforms	3-5
3-5	Power Converter	3-6
4-1	Motor-Gearbox Assembly	4-1
4-2	Output Shaft View of Motor	4-2
4-3	Motor and Shaft Encoder	4-2
4-4	Side View of Dynamometer	4-3
4-5	Top View of Dynamometer	4-3
4-6	Close-Up View of Delco Dynamometer	4-4
4-7	EMA Motor with Shaft Encoder	4-4
4-8	Motor Shaft	4-5
4-9	Rotor	4-5
4-10	Rotor Before Banding	4-6
4-11	Rotor After Banding	4-7
4-12	Stator Without Windings	4-7
4-13	Stator with Windings	4-8
4-14	Digital Shaft Encoder	4-9
4-15	Side View of Motor-Gearbox	4-10
4-16	View of Motor-Gearbox Showing Tachometer and Position Feedback Transducers	4-11
4-17	Single-Channel Electronics Test Setup	4-13
4-18	Single-Channel Power Electronics Assembly, Power Transistor Side	4-14
4-19	Single-Channel Power Electronics Assembly, Driver Side	4-14
4-20	Transistor Base Drive Power Output Circuit Card Assembly	4-15
4-21	Transistor Base Drive Power Oscillator Circuit Card Assembly	4-15
4-22	Low-Level Electronics Enclosures, Rear View	4-16
4-23	Low-Level Electronics Enclosures, Front View	4-17
5-1	Idealized EMA Block Diagram	5-2
5-2	EMA Mechanization Diagram	5-4
5-3	Adjustable Current Command Rate Limiter	5-5
5-4	EMA Operating Regions	5-6
5-5	$ N < X $ and $ N > X $	5-7
5-6	NCCW and NCW Conditions	5-7
5-7	TCCW and TCW Conditions	5-8
5-8	High Power Motor Driver	5-9
5-9	Base Driver Power Supply	5-11
5-10	Base Driver Circuit	5-13
5-11	Derivation of Computation Decoding from the Optical Encoder	5-19
5-12	Decoder Timing Diagram	5-20

LIST OF ILLUSTRATIONS (cont'd)

<u>Figure</u>		<u>Page</u>
5-13	Derivation of Velocity (Rate) Signal from the Optical Encoder	5-21
7-1	Motor Currents for Several Commutation Angles	7-3
7-2	Typical Frequency Response Measurements	7-12
7-3	Position Transient Response Design Goal	7-17
7-4(a)	Step Response to 2% Command ($K_p = 6,100$ A/deg, $K_v = 0.17$ A/r/min, $\tau = 0.00$ second)	7-19
7-4(b)	Step Response to 3% Command ($K_p = 6,100$ A/deg, $K_v = 0.17$ A/r/min, $\tau = 0.00$ second)	7-20
7-4(c)	Step Response to 4% Command ($K_p = 6,100$ A/deg, $K_v = 0.17$ A/r/min, $\tau = 0.00$ second)	7-21
7-4(d)	Step Response to 5% Command ($K_p = 6,100$ A/deg, $K_v = 0.17$ A/r/min, $\tau = 0.00$ second)	7-22
7-5(a)	Step Response to 2% Command ($K_p = 12,000$ A/deg, $K_v = 0.27$ A/r/min, $\tau = 0.00$ second)	7-23
7-5(b)	Step Response to 3% Command ($K_p = 12,000$ A/deg, $K_v = 0.27$ A/r/min, $\tau = 0.00$ second)	7-24
7-5(c)	Step Response to 4% Command ($K_p = 12,000$ A/deg, $K_v = 0.27$ A/r/min, $\tau = 0.00$ second)	7-25
7-5(d)	Step Response to 5% Command ($K_p = 12,500$ A/deg, $K_v = 0.27$ A/r/min, $\tau = 0.00$ second)	7-26
7-6(a)	Step Response to 2% Command ($K_p = 6,100$ A/deg, $K_v = 0.22$ A/r/min, $\tau = 0.00$ second)	7-27
7-6(b)	Step Response to 3% Command ($K_p = 6,100$ A/deg, $K_v = 0.22$ A/r/min, $\tau = 0.00$ second)	7-28
7-6(c)	Step Response to 4% Command ($K_p = 6,100$ A/deg, $K_v = 0.22$ A/r/min, $\tau = 0.00$ second)	7-29
7-6(d)	Step Response to 5% Command ($K_p = 6,100$ A/deg, $K_v = 0.22$ A/r/min, $\tau = 0.00$ second)	7-30
7-7(a)	Step Response to 2% Command ($K_p = 6,100$ A/deg, $K_v = 0.22$ A/r/min, $\tau = 0.00$ second)	7-31
7-7(b)	Step Response to 3% Command ($K_p = 6,100$ A/deg, $K_v = 0.22$ A/r/min, $\tau = 0.00$ second)	7-32
7-7(c)	Step Response to 4% Command ($K_p = 6,100$ A/deg, $K_v = 0.22$ A/r/min, $\tau = 0.00$ second)	7-33
7-7(d)	Step Response to 5% Command ($K_p = 6,100$ A/deg, $K_v = 0.17$ A/r/min, $\tau = 0.00$ second)	7-34
7-8	Response Time of EMA as a Function of Step Command Size	7-35
7-9	Hysteresis Test Displays	7-39
7-10	Input and Output Waveforms from Threshold Tests at an Amplitude of 0.016% of Full Travel	7-40
7-11	Waveforms from Output Velocity Test	7-42

LIST OF TABLES

<u>Table</u>	<u>Title</u>	<u>Page</u>
4-1	Tachometer Specifications	4-12
4-2	Position Transducer Specifications	4-12
5-1	Definitions	5-3
7-1	Data from Commutation Angle Control Tests	7-2
7-2	Data from Full Power Motoring Tests	7-5
7-3	Data from Motor Torque Characteristic Tests	7-6
7-4	Data from Motoring Tests	7-7
7-5	Data from Regeneration Tests	7-9
7-6	Data from Torque Control Test	7-10
7-7(a)	Data from Frequency Response Tests	7-14
7-7(b)	Data from Frequency Response Tests	7-14
7-7(c)	Data from Frequency Response Tests	7-15
7-7(d)	Data from Frequency Response Tests	7-15
7-7(e)	Data from Frequency Response Tests	7-16
7-7(f)	Data from Frequency Response Tests	7-16
7-8	Data from Linearity Tests	7-37

SECTION I INTRODUCTION

A technology program has been conducted to investigate the feasibility of using electromechanical devices as primary flight control actuators for aerospace vehicles. This program was initiated after studies of electrohydraulic and electromechanical systems had indicated that a highly efficient battery-powered electromechanical actuation system had potentially significant advantages over the electrohydraulic actuation system. In addition to its potential weight reduction (extremely important in many aircraft, missile, and spacecraft applications) the Electromechanical Actuator (EMA) shows great promise in terms of reliability and maintainability. However, before such an approach could be seriously considered, hardware feasibility of electromechanical actuator concepts suitable for aerospace vehicle applications had to be demonstrated.

The feasibility demonstration has been conducted in two phases. Delco's earlier efforts (reported in R78-1, "Final Report on the Electromechanical Flight Control Actuator", January 1978) resulted in the development of a four-channel electromechanical actuator (Figure 1-1). This actuator follows a proportional control command with minimum wasted energy. Each of the four channels has independent drive and control electronics, a brushless electric motor with brake, and velocity and position feedback transducers. A differential gearbox sums the output velocities of the motors. Normally, two motors are active and the other two are braked. A 270 Vdc battery powers the actuator.

The major tasks conducted in the initial phase of the program included:

- Design and fabrication of the four-channel actuator,
- Design and installation of necessary test instrumentation,
- Modification of the NASA-furnished actuator test stand,
- Development of mathematical models of the actuator and its major subsystems,
- The design, fabrication, and testing of a state-of-the-art single-channel power electronics breadboard,

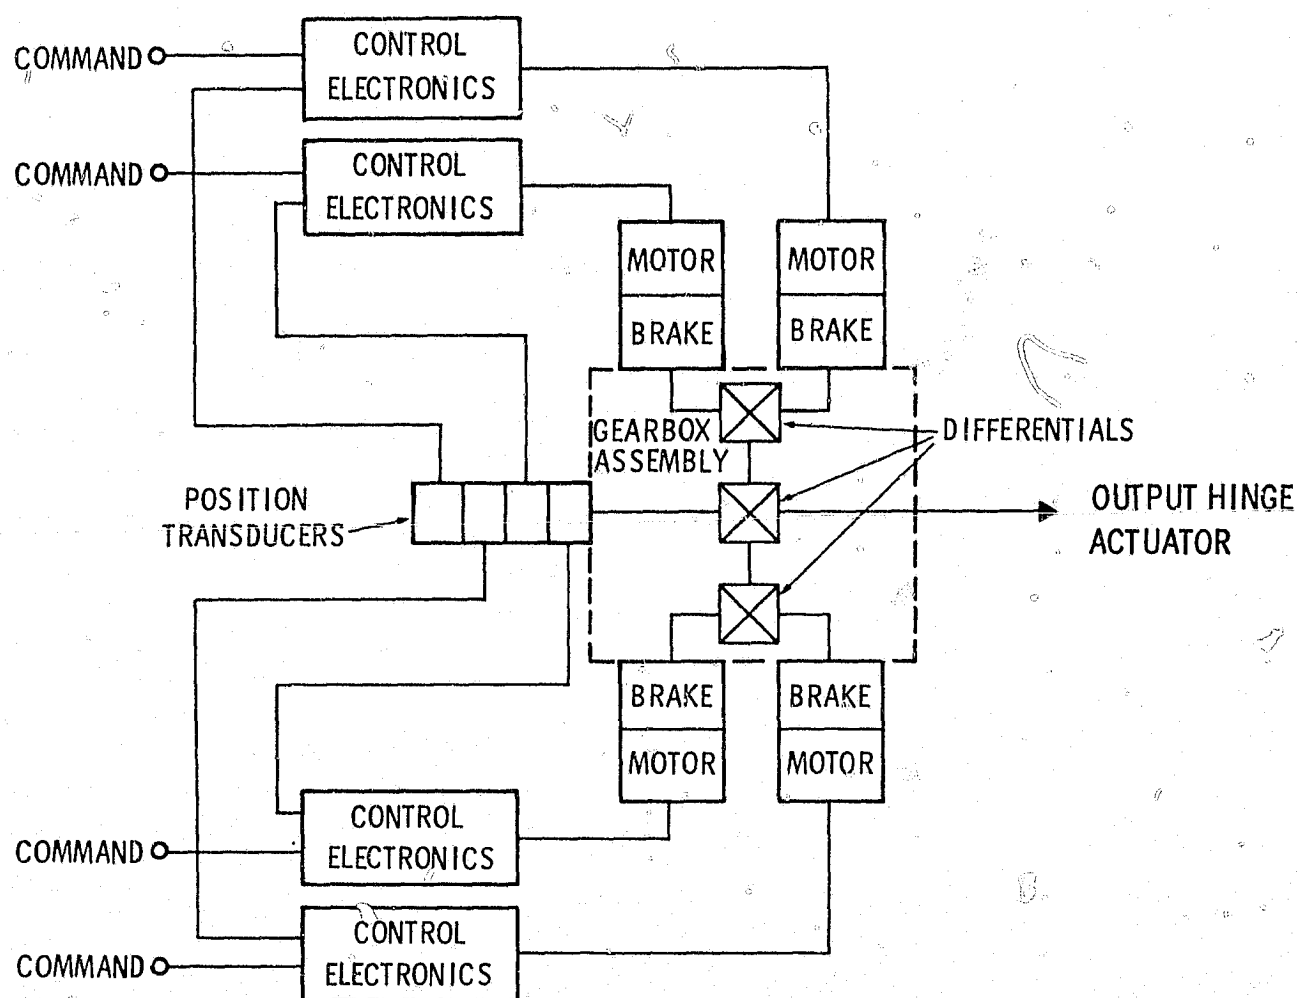


Figure 1-1. Four-Channel Electromechanical Actuator Block Diagram

- Planning and conducting design verification tests of the four-channel actuator,
- Participation in formal program reviews,
- Documentation of the program with plans, reports, and an operations manual.

The initial phase of the program was highly successful. As a result, a second phase of the program was initiated in March, 1978. The major tasks for this phase of the program included:

- Redesigning the EMA motor to utilize improved permanent magnet materials,
- Fabricating, assembling, and testing the improved motor,
- Designing, developing, and testing an improved rotor position sensor/tachometer,
- Analysis and design of the necessary equipment to complete a single-channel EMA using the single-channel power electronics breadboard,
- Fabrication and assembly of the single-channel EMA,
- Planning and conducting system tests to determine the performance characteristics of the single-channel EMA,
- Participating in conferences and documenting the program activities with necessary plans and reports.

This report summarizes the results of the second phase of the EMA development program. However, for purposes of clarity and completeness, some of the material reported earlier is also included in this report.

SECTION II CONCLUSIONS AND RECOMMENDATIONS

2.1 CONCLUSIONS

The Electromechanical Flight Control Actuator program has clearly demonstrated the feasibility of meeting stringent space vehicle flight control actuator performance requirements using advanced motor and power electronics concepts.

During the most recent phase of the program, a single-channel Electromechanical Actuator (EMA) has been developed and tested at full output power levels (17 hp). These tests have shown that the EMA exceeded virtually all its design goals. The design goal for displacement linearity is 1% of full travel. The worst-case measured deviation was found to be 0.07%, and the standard deviation was determined to be 0.018%. The design goal for system threshold is 0.0275 degree, and the EMA easily met this requirement. The measured threshold was well under 0.005 degree. The position null design goal is 0.275 degree, and this requirement was also met. The hysteresis design goal is 0.0275 degree, and measured hysteresis was 0.002 degree.

The measured frequency response characteristics of the single-channel EMA also exceeded the system design goals. By adjusting system gains, time constants, and other parameters, the frequency response can be adjusted over rather wide limits. For a typical set of adjustments, the -3 dB bandwidth was slightly greater than 6 Hz compared with a design goal of at least 4 Hz. The phase characteristics for the same conditions also met the design goals, with the measured phase lag of 45 degrees occurring at 2.4 Hz compared with a design goal of at least 1.6 Hz. The measured step response characteristics of the EMA were the only characteristics that did not exceed system design goals. The two most critical step response design goals are overshoot and time to reach 85% of steady-state travel. The design goal for overshoot is 25% or less and the EMA can easily meet this requirement with a variety of gain and compensation adjustments. The design goal for the time to reach 85% of steady-state travel is 150 milliseconds. The EMA can achieve this goal for step amplitudes less than 3.8% of full travel, but the design goal was to meet this requirement for step input

commands ranging from 2 to 5% of full travel. To meet this design goal, the gear ratio of the EMA would have to be reduced by about

$$(5.0 - 3.8)/5.0 = 24\%$$

Since the EMA gear ratio is very large, the reflected load characteristics are negligible, and have little effect on the acceleration or velocity response of the system.

Perhaps the most important conclusion that can be drawn is that this program has clearly demonstrated that a high-power, high-performance flight control actuator is feasible using the technology available today. With the continuing improvements which are being made in magnetic materials and in power semiconductors, it is clear that EMA approaches are technically sound. For certain applications, they may well become the most suitable choice from among the wide range of available actuation methods.

2.2 RECOMMENDATIONS

The feasibility of the EMA has been demonstrated during this program. The next recommended major effort is the design, fabrication, and testing of a prototype unit suitable for flight testing. This effort would establish the size, weight, and environmental characteristics of a state-of-the-art electromechanical actuator concept, and would also demonstrate the performance capabilities that can be achieved. After laboratory tests have been made (including flight simulation tests), actual flight tests should be conducted. These tests should be made on an aircraft having sufficient space available for monitoring and recording the behavior of the actuator under the full range of flight conditions typical of high performance aircraft.

SECTION III SYSTEM FUNCTIONAL DESCRIPTION

3.1 EMA FUNCTIONAL DESCRIPTION

The most unique feature of the EMA is its use of a brushless synchronous motor having a permanent magnet rotor. The stator of this machine is similar to that of a conventional three-phase synchronous or induction motor, and is simple in construction and windings. The rotor has permanent magnet poles made of samarium cobalt, which is an extremely effective magnetic material, resulting in a lightweight, low-inertia machine with very high efficiency. The ceramic-like magnets are bonded to a solid steel shaft. A fiberglass band is wrapped around the rotor to aid in resisting centrifugal forces, and provides a smooth, cylindrical rotor surface to minimize windage losses. Brushes and commutator are eliminated in this machine through the use of the rotor position sensor (RPS) and solid-state electronics. The stator windings of the motor are excited by three-phase waveforms to create a rotating magnetic field. As the rotor moves, the RPS sends signals to the control electronics to indicate which windings should receive excitation to produce the torque required by the load. Thus, the machine operates in a manner similar to a conventional dc motor, except that the conventional commutator and brushes are replaced by the RPS and control electronics. The resulting machine is capable of operating at much higher speeds than one having rotor windings and a commutator. Because the permanent magnet rotor has virtually no losses, the thermal problems associated with cooling the machine are greatly simplified. Virtually all losses in the machine occur in the stator; therefore, cooling is easily accomplished by forcing air to flow through the stator slots which are only partially filled by the machine's windings.

The power control electronics for the machine are relatively simple. For servo control purposes it is very convenient to provide a controlled torque mode of operation. This is easily accomplished in the permanent magnet motor because its output torque is proportional to the current in the stator windings. For a given rotor position, two of the stator windings receive excitation. Idealized motor

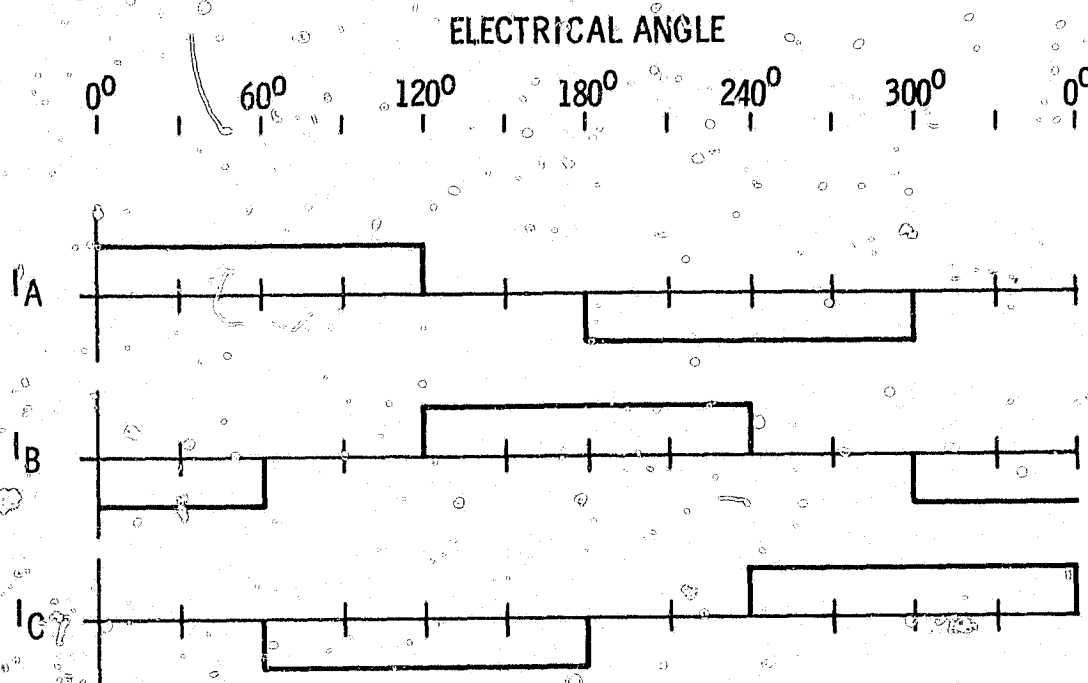


Figure 3-1. Idealized Motor Phase Currents

phase currents are shown in Figure 3-1. For example, at electrical angles between 0° and 60° , the motor current flows into winding A and out through winding B. During the next interval, from 60° to 120° , the current continues to flow into winding A, but out through winding C. The current is thus commutated at intervals of 60 electrical degrees to provide three-phase current waveforms. The magnitude of the current is controlled to produce the desired torque, and the rotor position sensor and control electronics switch the controlled current through the appropriate pair of windings.

3.1.1 SYSTEM OPERATION

Figure 3-2 is a simplified system block diagram of the electromechanical actuator. For convenience, all torque, inertia, and motion variables are referenced to the load. Linearized load effects (viscous damping, load spring and steady-state hinge moments) are represented, and the velocity and position feedback paths are also shown.

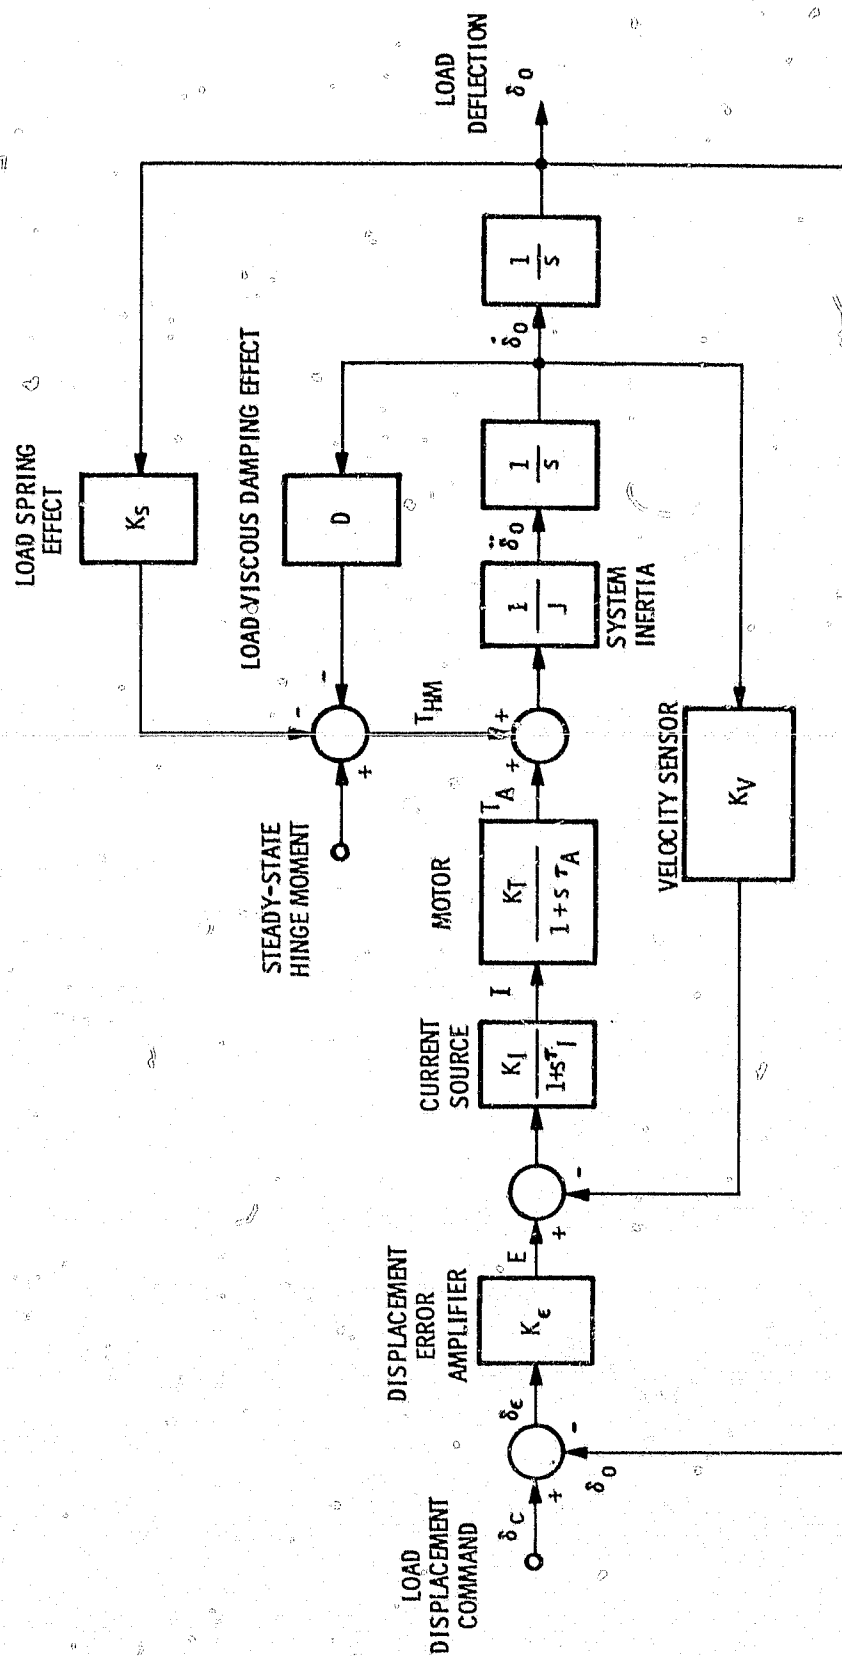


Figure 3-2. Simplified Block Diagram of the EMA

The position command and position feedback signals are compared to form a position error signal. This signal is amplified and combined with the velocity feedback signal to develop a current command signal. The current source develops a motor current in response to the current command signal. The motor current produces a torque which accelerates the reflected inertia of the system and overcomes the reflected hinge moment of the load

3.1.2 CURRENT SOURCE POWER CONVERTER

The brushless, self-synchronous motor is driven by a current source power converter. The current source power converter is achieved with an inductor-coupled pulse width modulator (chopper) and inverter (Figure 3-3). The chopper establishes a dc current level in the coupling inductor in response to a torque error signal. The inductor current is processed by the inverter to form a six-step motor current waveform (Figure 3-4).

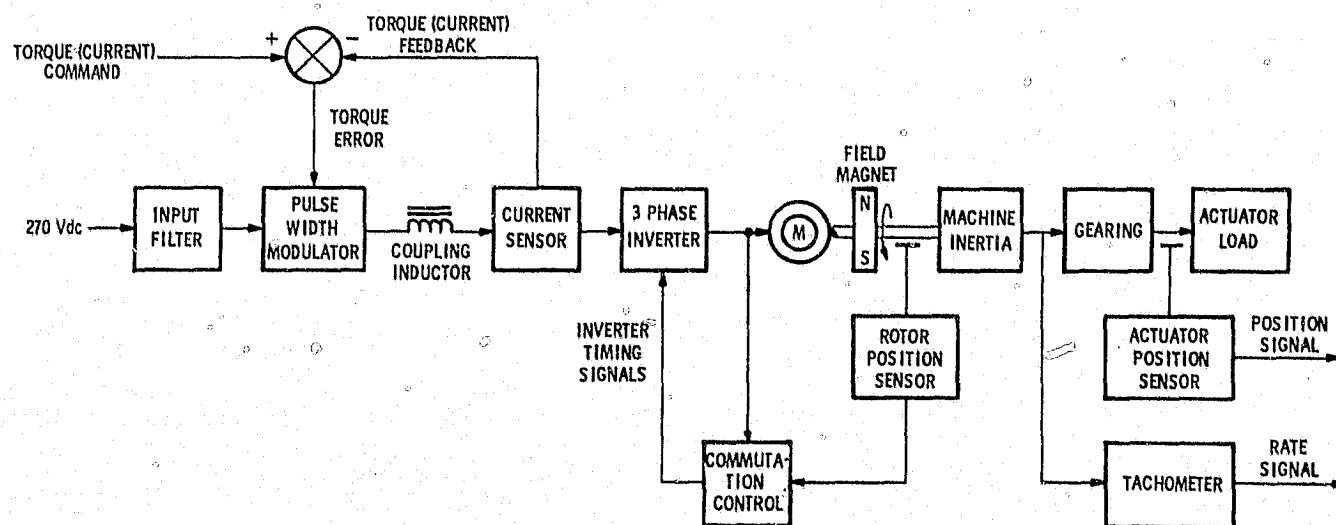


Figure 3-3. Controller Block Diagram

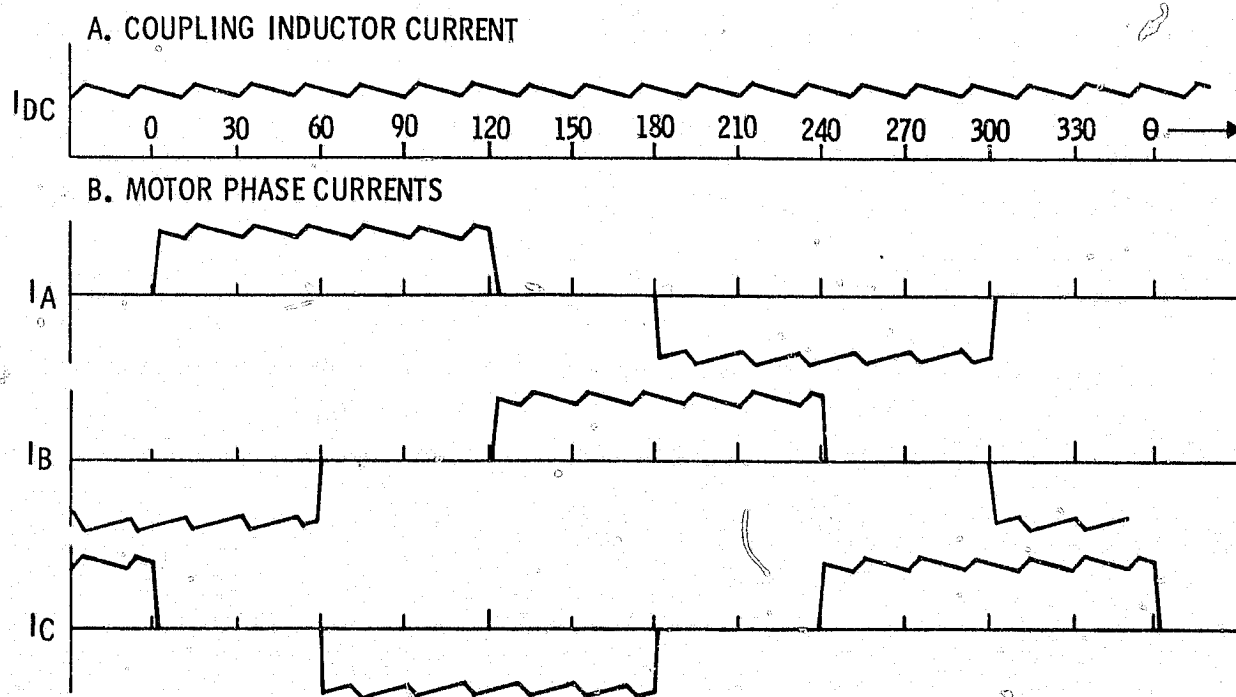


Figure 3-4. Typical Power Converter Waveforms

3.2 POWER CONVERTER FUNCTIONAL DESCRIPTION

Figure 3-5 is a simplified schematic diagram of the power converter. QAP through QCN are connected to form a three-phase inverter. The inverter controls the currents in the motor stator windings. Switches QM1 and QM2 control the current through the inverter during motoring operation, and QB1 and QB2 control the inverter current during regenerative braking.

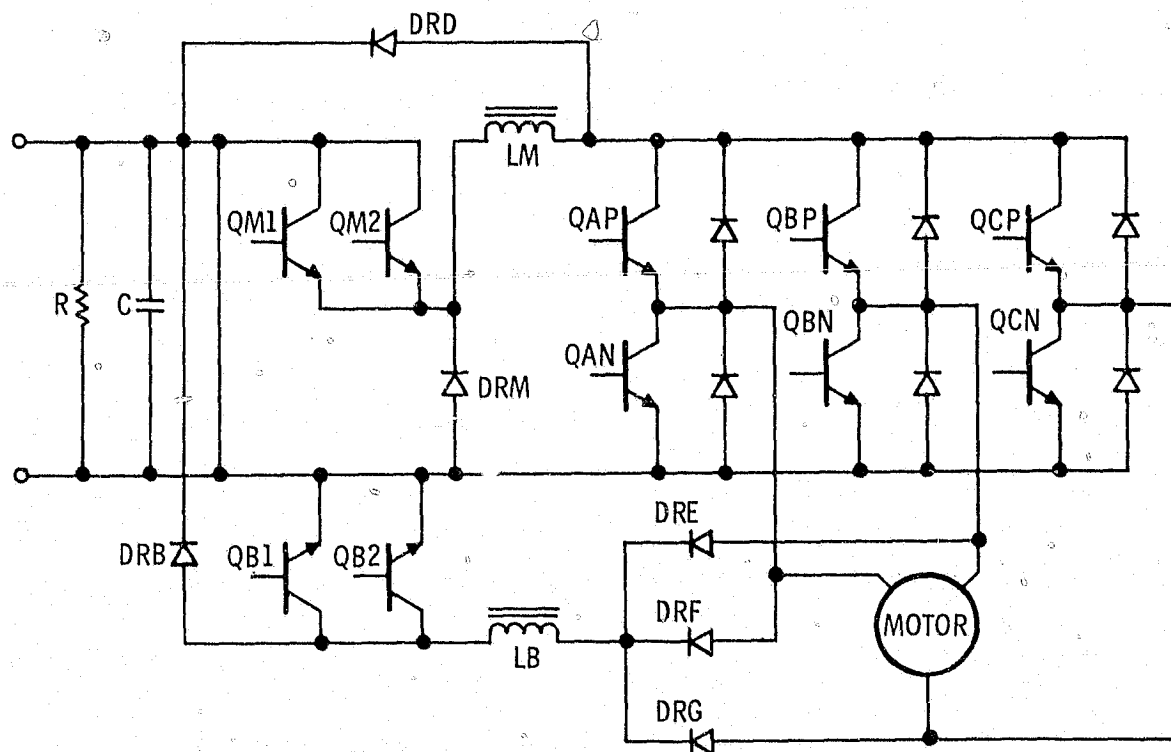


Figure 3-5. Power Converter

3.2.1 MOTORING OPERATION

During motoring operation, if the current in the current source inductor LM is less than the commanded value, either QM1 or QM2 is turned on; this applies full battery voltage to the coupling inductor LM. Therefore, current increases in the inductor as indicated in Figure 3-4. Hysteresis in the control circuit allows the current to build up to a preestablished level which is

slightly greater than the commanded current. At this point, the transistor is turned off. The current which is flowing through the inductor at the switching time then flows through diode DRM. The current then decreases to a value slightly below the commanded current, at which point either QM1 or QM2 is again turned on, thus restarting the cycle. QM1 and QM2 operate alternately, thereby reducing their average dissipation.

Figure 3-4 shows the coupling inductor current waveform, as well as the motor phase currents.

The current in the inductor is routed through the proper motor windings by the inverter transistors QAP through QCN. These transistors are turned on and off by signals which are derived from the Rotor Position Sensor.

3.2.2 REGENERATIVE BRAKING


When the load is capable of returning energy to the battery, the power converter operates in a regenerative mode. In this mode, the inverter transistors (QAP through QCN in Figure 3-5) are all turned off. The antiparallel diodes of QAN, QBN, and QCN in conjunction with diodes DRE, DRF, and DRG then act as a three-phase full-wave rectifier load on the motor (which is operating as a permanent-magnet generator). Current through the coupling inductor LB is controlled by transistors QB1 and QB2 and the braking diode, DRB. If the current in the coupling inductor LB is less than the commanded current, one of the braking transistors is turned on. Again, hysteresis designed into the control circuitry allows the current to build up in the inductor to a level slightly greater than the commanded value. At this point, the braking transistor is turned off, and the current flowing in the inductor now flows through diode DRB back into the battery. When the current decreases to a value somewhat lower than the commanded value, the braking transistor is again turned on, thus restarting the current control cycle. The braking transistors QB1 and QB2 are operated alternately to reduce their average power dissipation.

SECTION IV

EQUIPMENT DESCRIPTION

4.1 MOTOR-GEARBOX ASSEMBLY

The motor-gearbox assembly is shown in Figure 4-1. The shaft encoder is located at the right end of the assembly, and it is attached to the shaft of the EMA motor by a bellows coupling. The motor windings are brought out to a terminal block on the stand. The instrument gear train is shown at the left side of the assembly. A dial indicates the position of the output stage of the gearing.

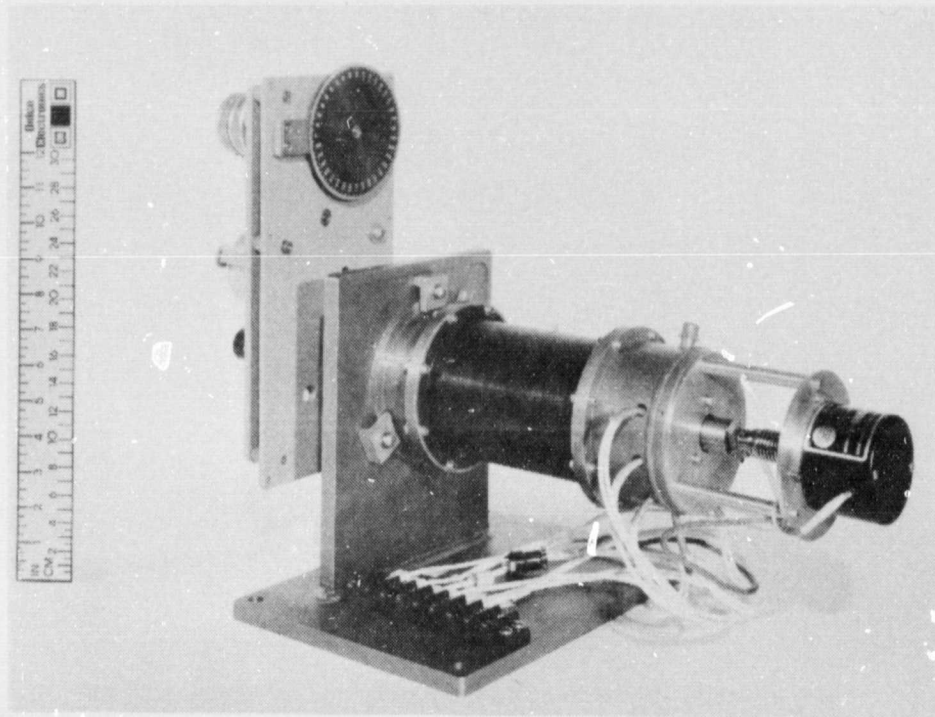

• Figure 4-1. Motor-Gearbox Assembly

Figures 4-2 and 4-3 are two views of the motor and shaft encoder before attaching the gearbox assembly.

ORIGINAL PAGE IS
OF POOR QUALITY

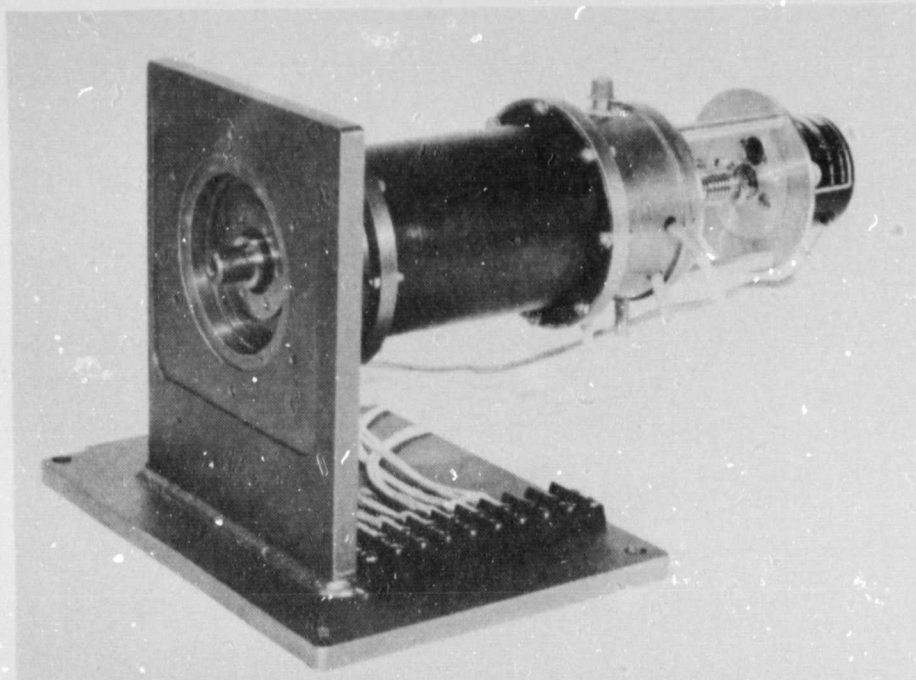


Figure 4-2. Output Shaft View of Motor

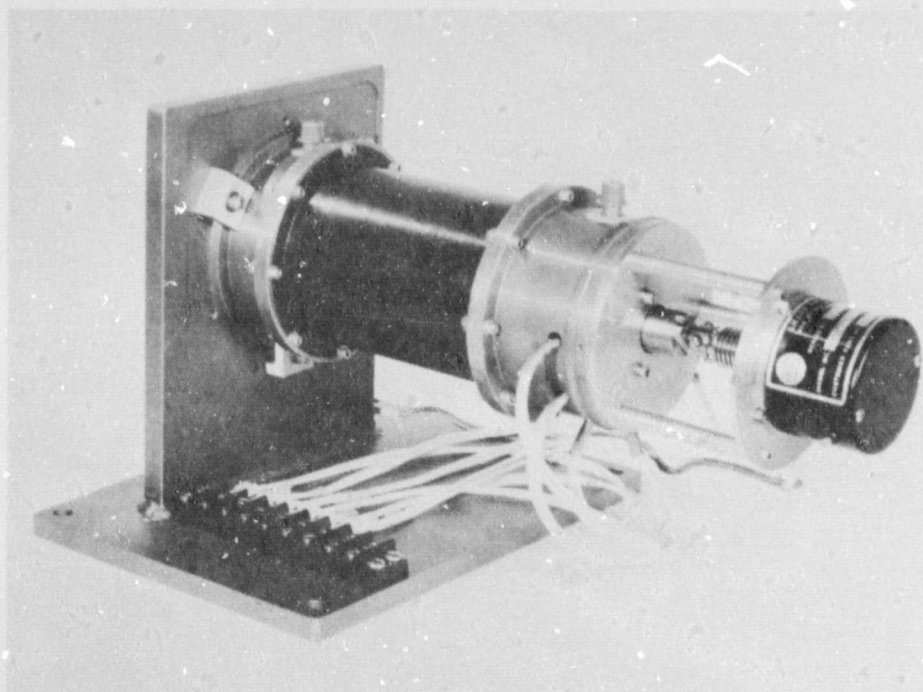


Figure 4-3. Motor and Shaft Encoder

During performance testing of the EMA motor it was mounted on Delco's dynamometer (see Figures 4-4 through 4-7).

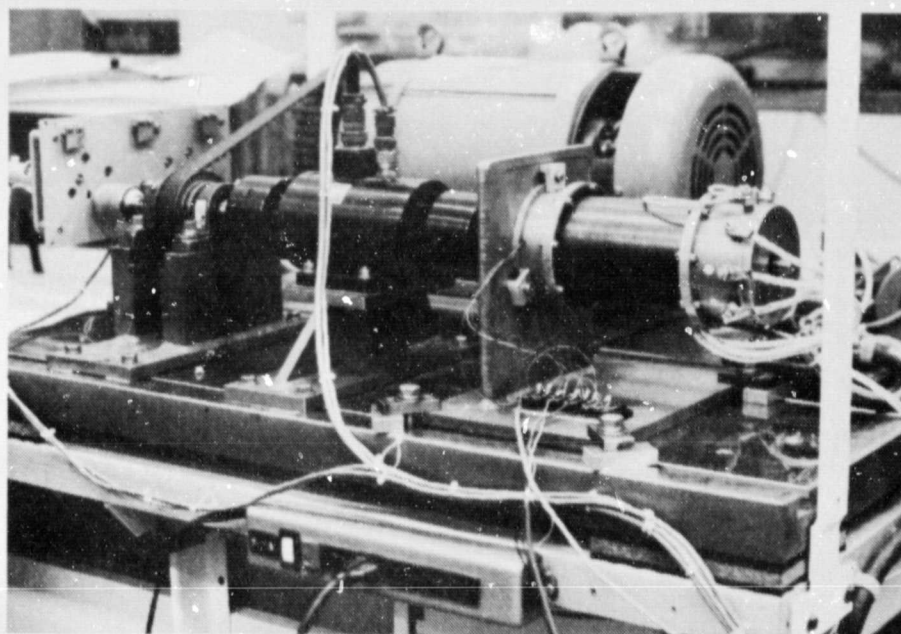


Figure 4-4. Side View of Dynamometer

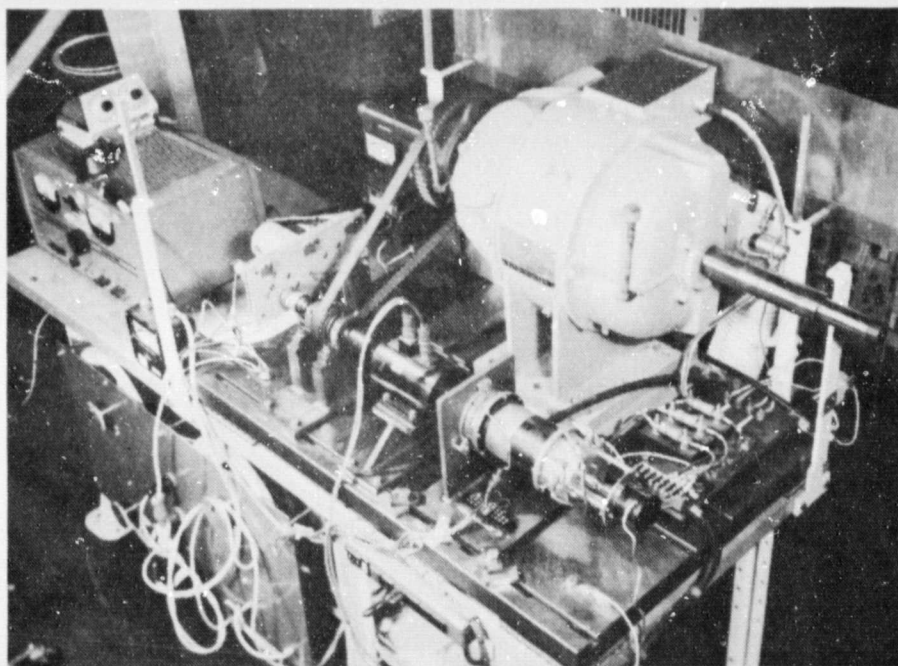


Figure 4-5. Top View of Dynamometer

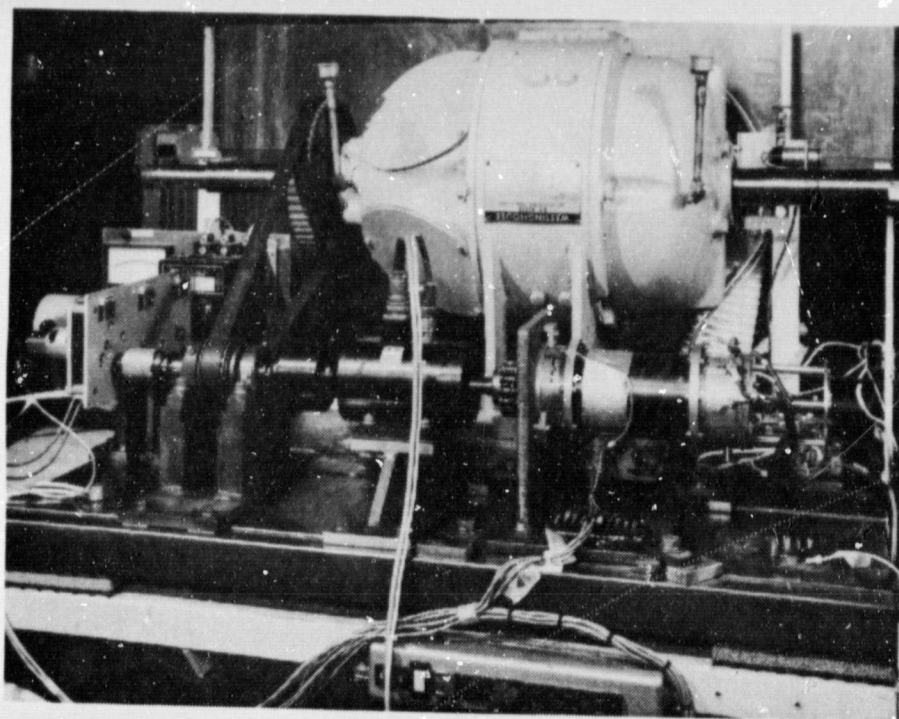


Figure 4-6. Close-Up View of Delco Dynamometer

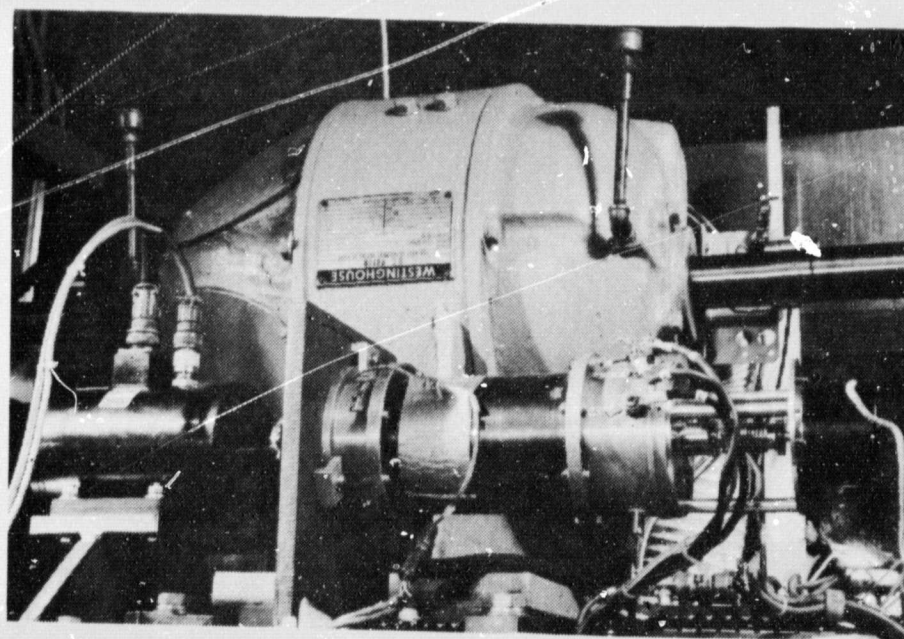


Figure 4-7. EMA Motor with Shaft Encoder

4.1.1 MOTOR

Figure 4-8 shows the motor shaft before the permanent magnets are attached. Since the motor is an eight-pole machine, the central portion of the shaft has an octagonal cross section. Figure 4-9 shows the rotor with the samarium cobalt

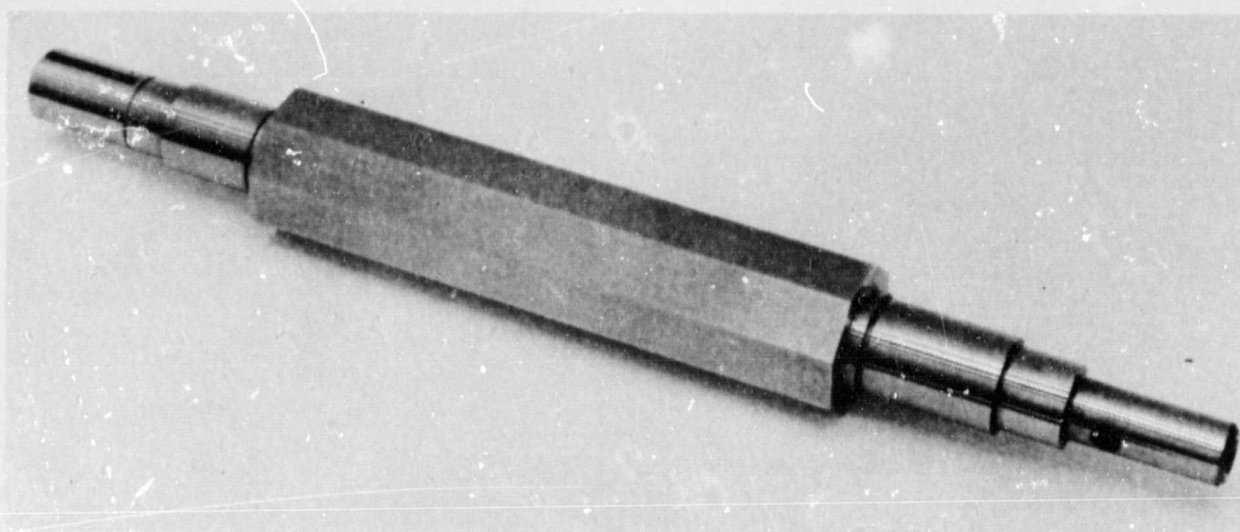


Figure 4-8. Motor Shaft

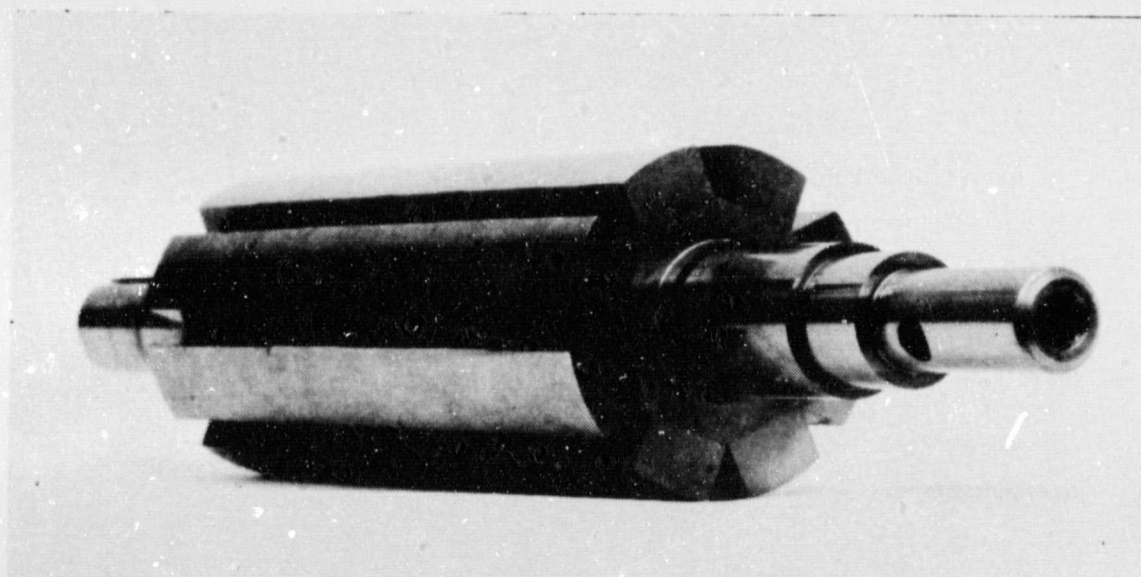


Figure 4-9. Rotor

magnets attached. The samarium cobalt material has a high energy product (26 million Gauss oersteds). The magnetic blocks, approximately 7/8 inch long, are bonded to the rotor shaft and then ground to a cylindrical form. Brass end discs are bonded to the magnet assembly and retained by snap rings (Figure 4-10).

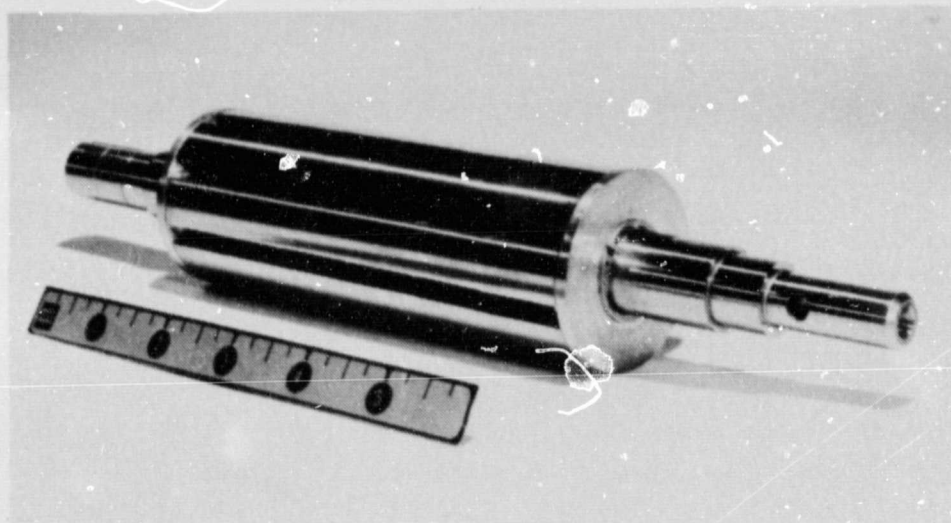


Figure 4-10. Rotor Before Banding

The end discs provide material which can be removed during dynamic balancing; they also reduce windage losses and provide a termination point for the rotor banding. The banding is a high-strength glass filament winding which is wound under tension. The banded rotor (Figure 4-11) is ground to provide an accurate diameter for mechanical clearance in the stator bore.

The stator is shown in Figure 4-12; the stator laminations are 7 mils thick and are Vanadium Permendur. Figure 4-13 shows the stator with windings in place.

The motor assembly is 9.25 in. long. The motor frame diameter is 3.75 in. and the motor weighs 17.2 lb.

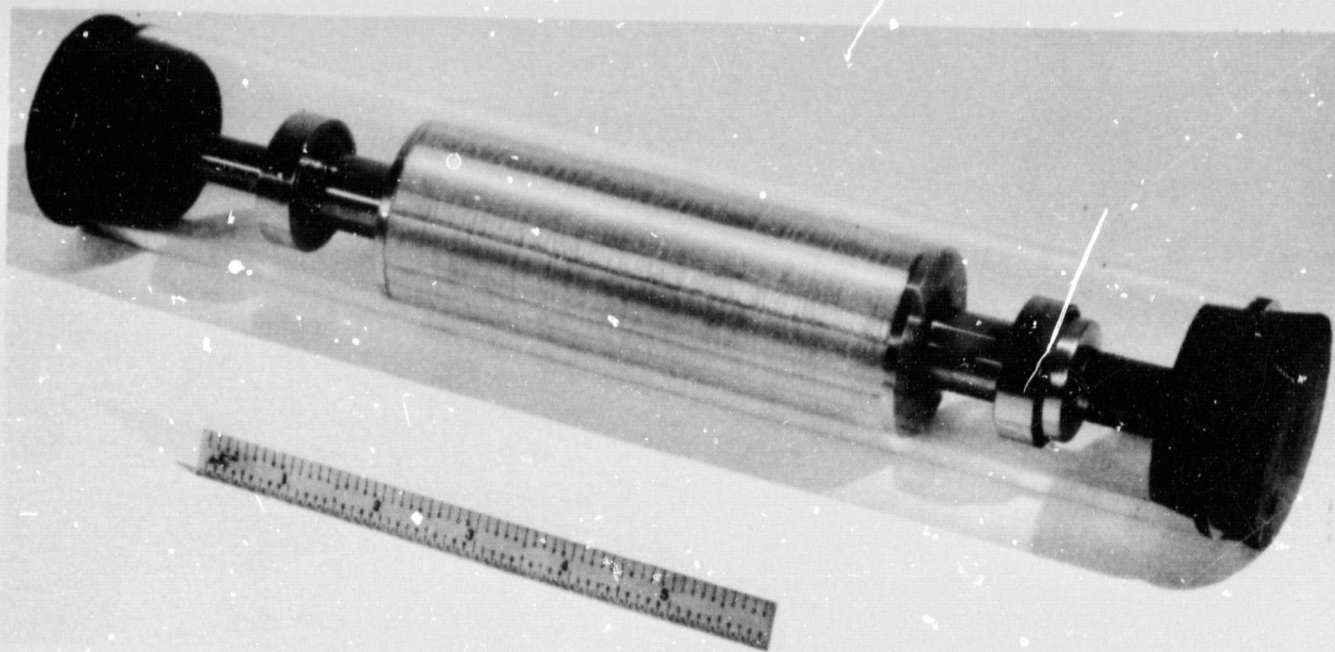


Figure 4-11. Rotor After Banding

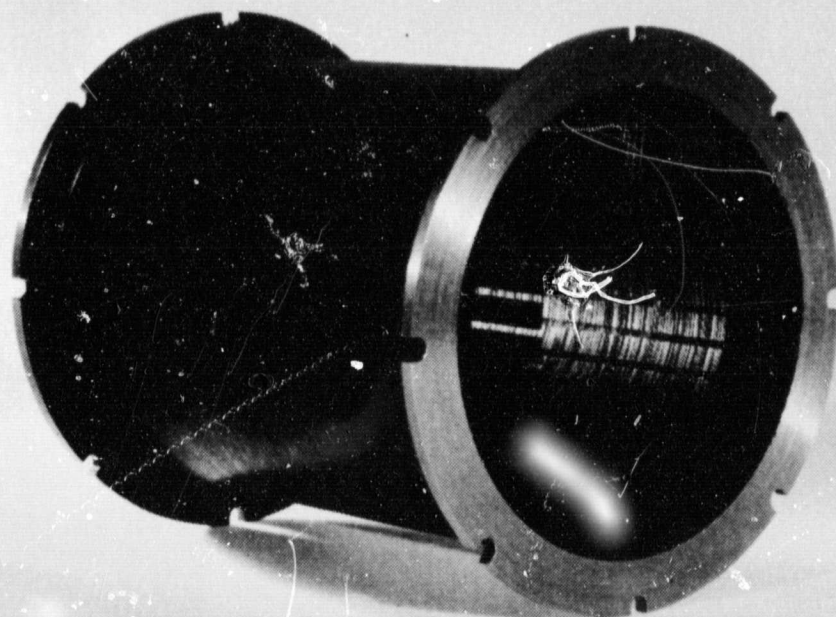


Figure 4-12. Stator Without Windings

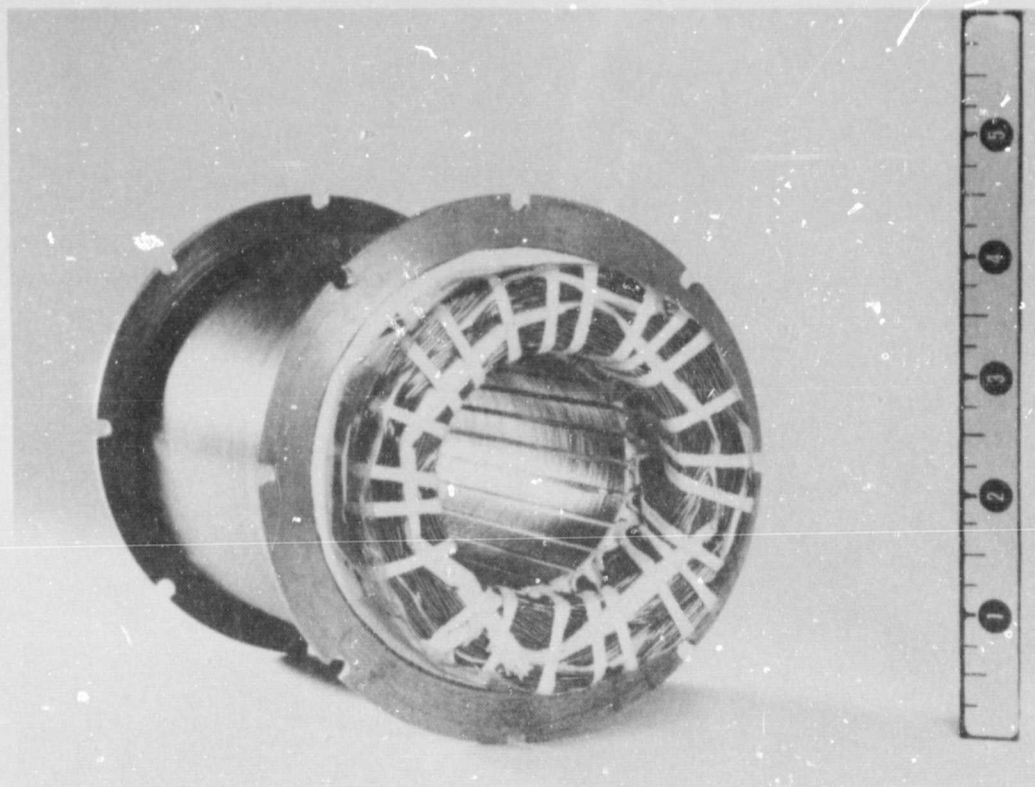


Figure 4-13. Stator With Windings

4.1.2 SHAFT ENCODER

The shaft encoder is shown in Figure 4-14.

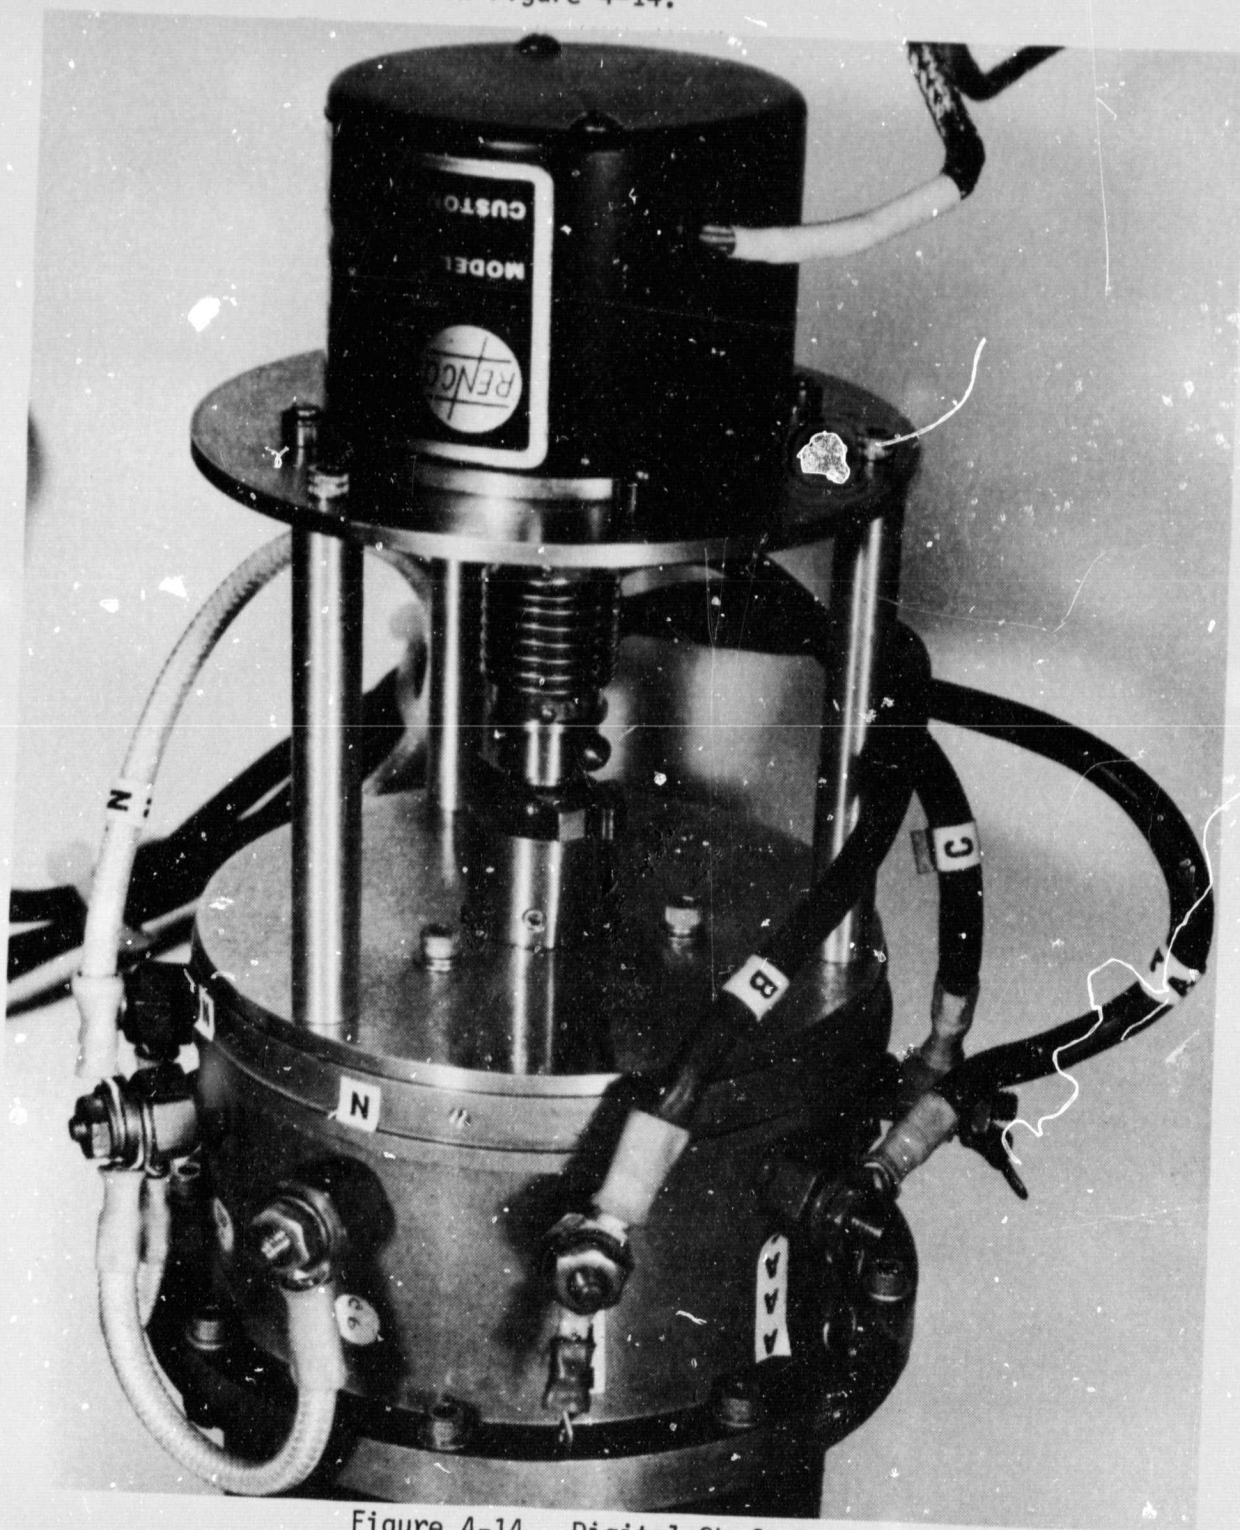


Figure 4-14. Digital Shaft Encoder

The encoder has a three-bit output. An absolute reference point is provided (once each revolution), and the other two bits provide incremental position data with a resolution of 0.25 mechanical degrees (1,440 pulses per revolution).

4.1.3 GEARBOX

The gearbox is shown at the left end of the motor-gearbox assembly (Figure 4-15).

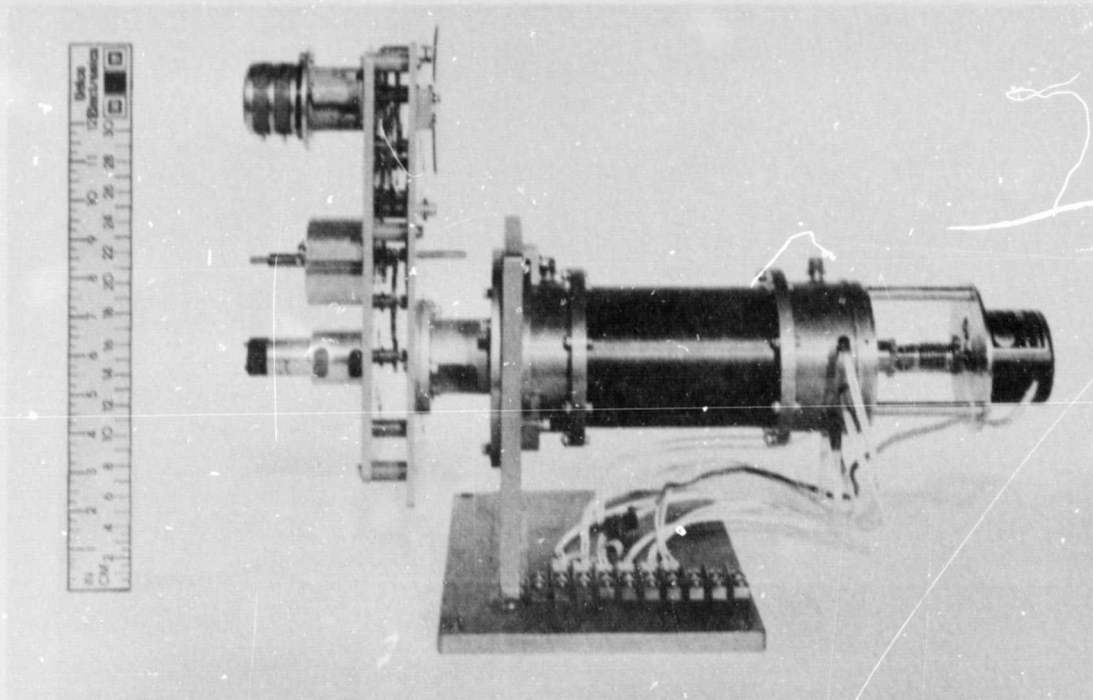


Figure 4-15. Side View of Motor-Gearbox

The tachometer is mounted on the lower left section of the gearbox, and the position feedback transducer is located on the upper left section of the gear-train.

The gear reduction from motor to output is approximately 3600:1. Figure 4-16 is a view of the motor-gearbox assembly showing the position feedback transducers and the tachometer.

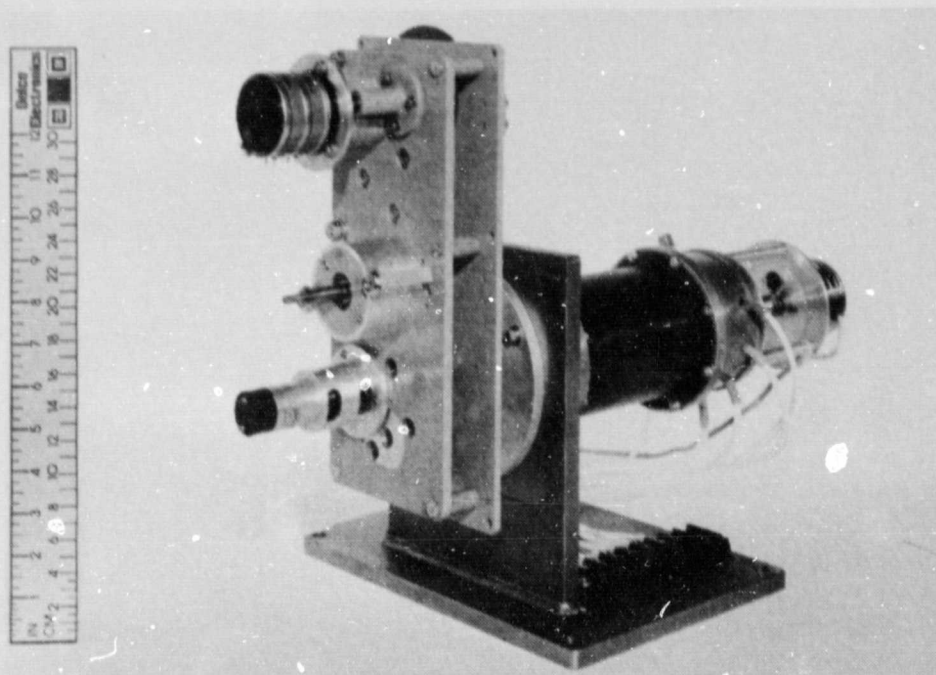


Figure 4-16. View of Motor-Gearbox Showing Tachometer and Position Feedback Transducers

4.1.4 TACHOMETER

The electromechanical tachometer is directly coupled to the motor shaft. It has a highly linear speed/voltage characteristic, operates bidirectionally, and is designed for long operating life. Important specifications for the tachometer are listed in Table 4-1.

In addition to the electromechanical tachometer there is an output position rate signal which is derived from the rotor shaft position encoder. This circuitry is described in paragraph 5.3.

Output voltage gradient	7.0 V/1000 r/min
Output impedance, maximum	350 ohms
Output linearity, 100 to 6,000 r/min	0.1%
Ripple voltage, maximum rms	3%
Bidirectional output voltage error	0.25%
Maximum speed	12,000 r/min
Friction torque, maximum	0.25 oz-in.
Armature inertia, maximum	6.5 gm-cm ²
Weight, maximum	3.0 oz
Mechanical natural frequency, minimum	1,800 Hz
Life expectancy at 3,600 r/min	10,000 h

Table 4-1. Tachometer Specifications

4.1.5 POSITION TRANSDUCER

The position transducer consists of two precision servo potentiometers ganged on a single shaft. The transducers utilize a film resistive element to achieve virtually infinite resolution. Some of the major features of the position transducer are listed in Table 4-2.

Diameter	2.0 in.
Resistance (each element)	10K ohms
Linearity	0.25%
Electrical Travel	340°
Standard Life Expectancy	10 M revolutions

Table 4-2. Position Transducer Specifications

4.2 ELECTRONICS

The electronic equipment for the EMA is shown in Figure 4-17. The low-level electronics are housed in the black enclosures, and the power electronics breadboard is the large assembly on the table in the foreground.

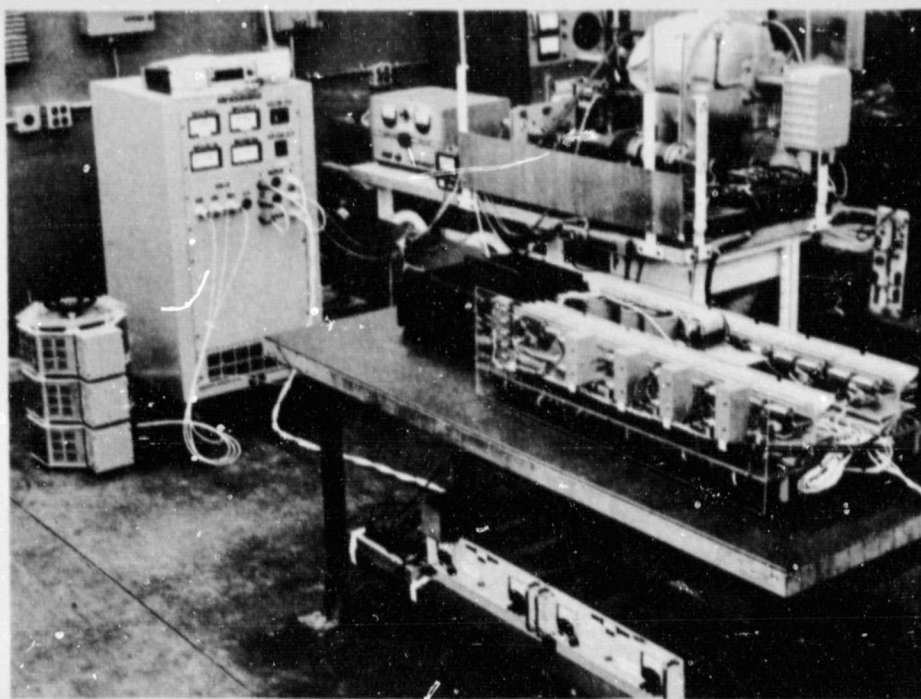


Figure 4-17. Single-Channel Electronics Test Setup

4.2.1 POWER ELECTRONICS

A closer view of the power electronics assembly is presented in Figure 4-18. The power transistors are mounted on the heat sinks which are located on the top side of the assembly. Figure 4-19 shows the reverse side of the power electronics assembly. This view shows the power transistor driver circuit cards. Close-up views of this card are presented in Figure 4-20. The power oscillator circuit card assembly is shown in Figure 4-21.

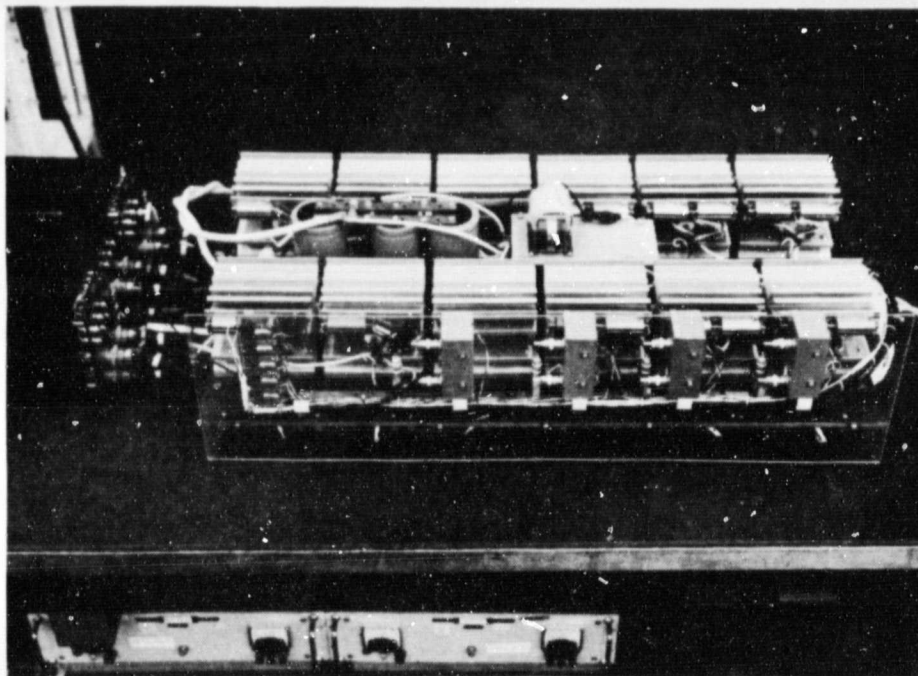


Figure 4-18. Single-Channel Power Electronics Assembly, Power Transistor Side

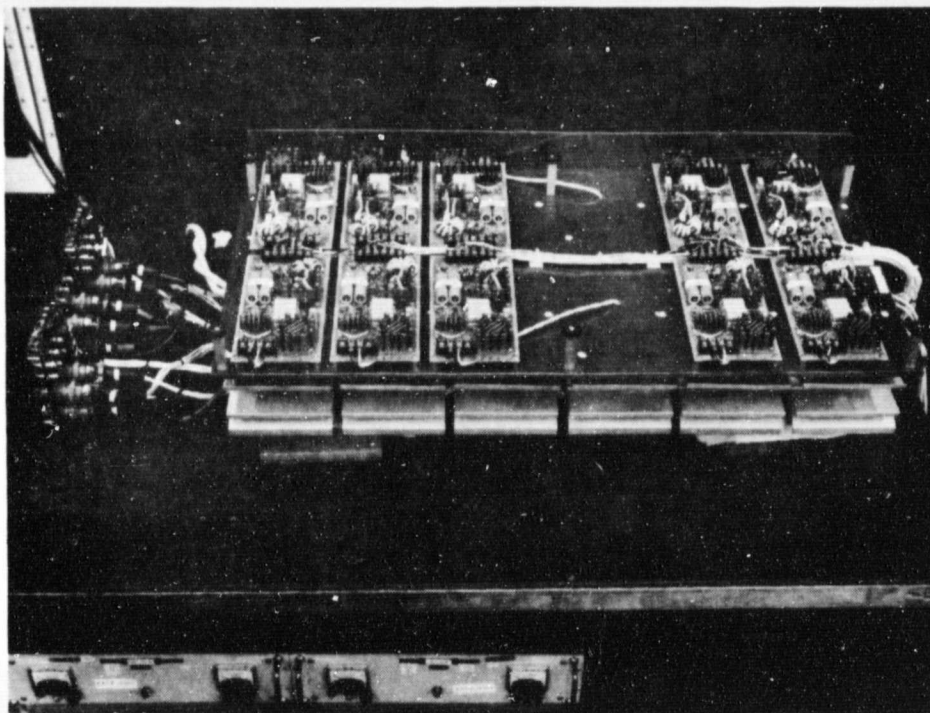


Figure 4-19. Single-Channel Power Electronics Assembly, Driver Side

ORIGINAL PAGE IS
OF POOR QUALITY

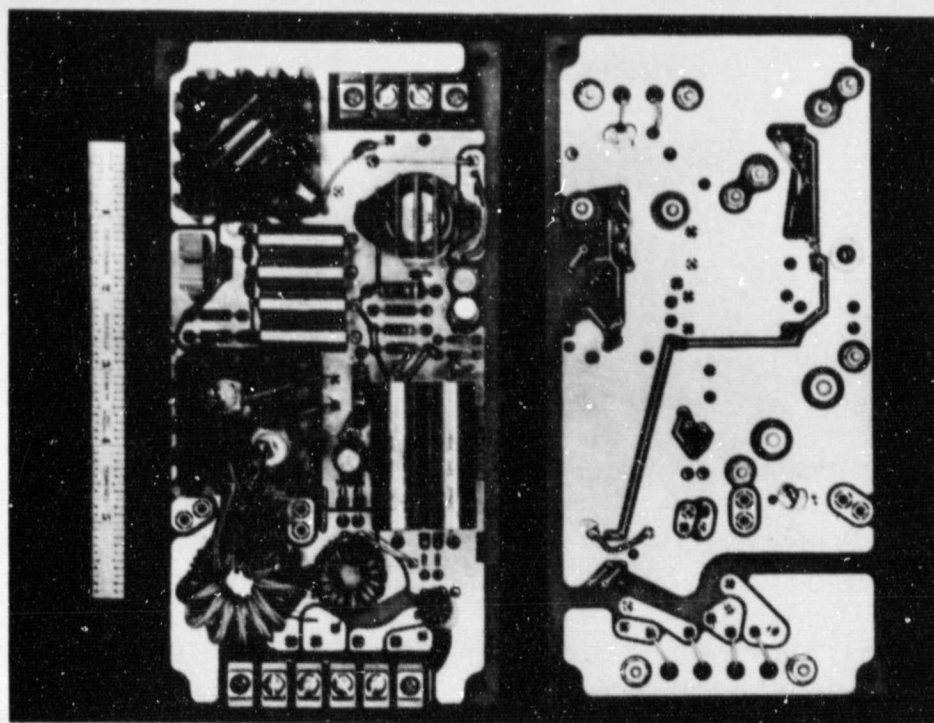


Figure 4-20. Transistor Base Drive Power Output Circuit Card Assembly

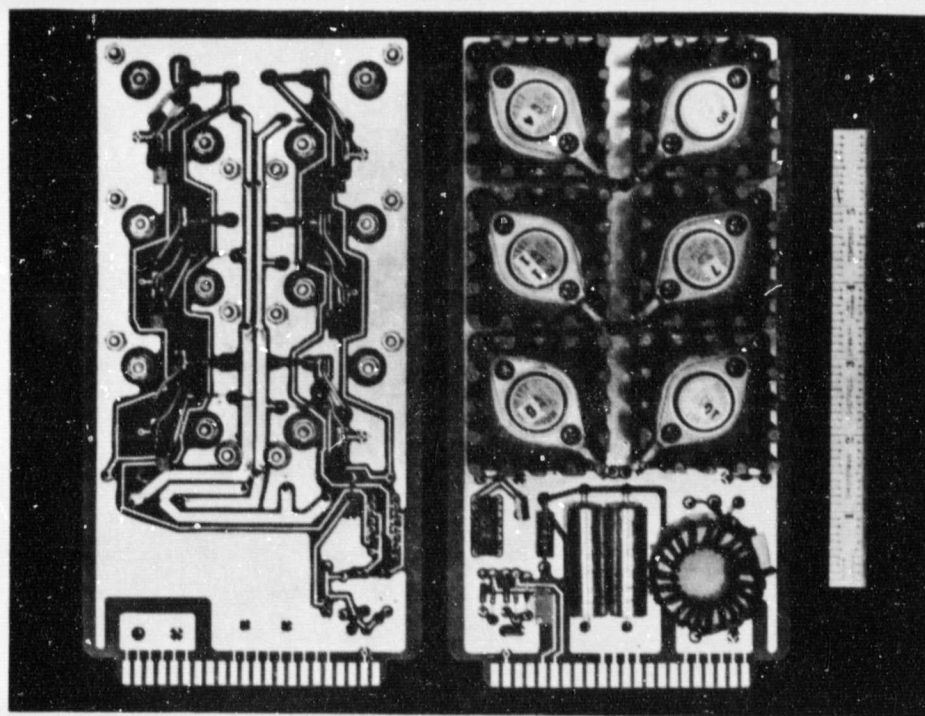


Figure 4-21. Transistor Base Drive Power Oscillator Circuit Card Assembly

4.2.2 LOW-LEVEL ELECTRONICS

The low-level electronics circuits are contained in the four enclosures shown in Figures 4-22 and 4-23. One box contains the rotor position sensor electronics, one houses the servo electronics, and the other two boxes control the chopper and inverter power switches. As can be seen in these figures, test jacks are available on the panels, and the RPS panel displays the motor shaft speed, the rotor angle, and the inverter switch drive conditions.

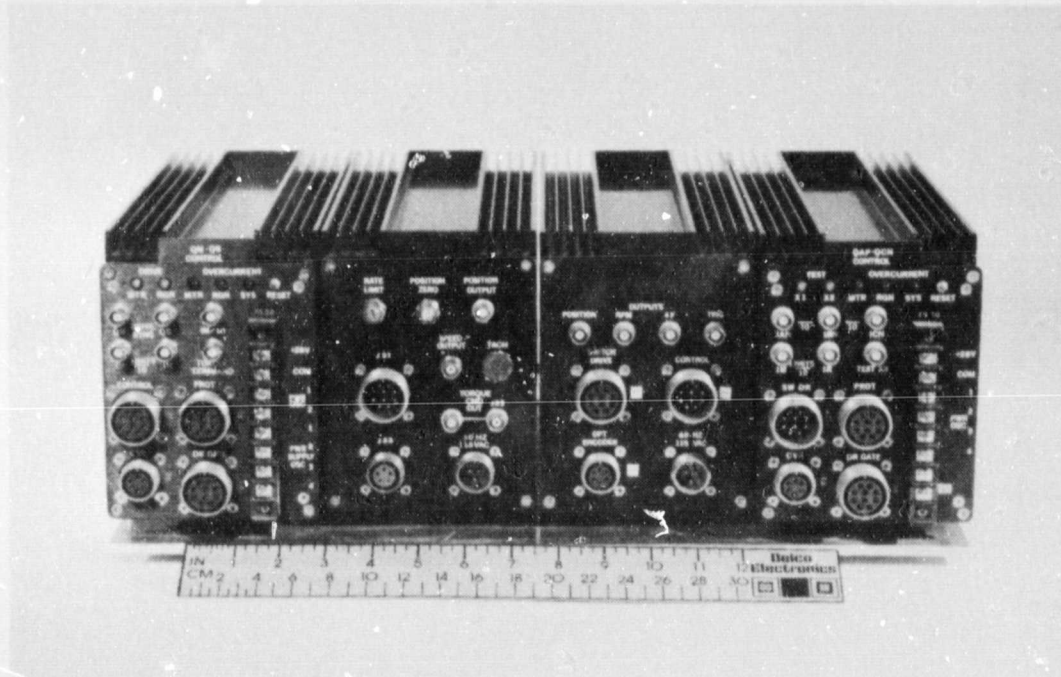


Figure 4-22. Low-Level Electronics Enclosures, Rear View

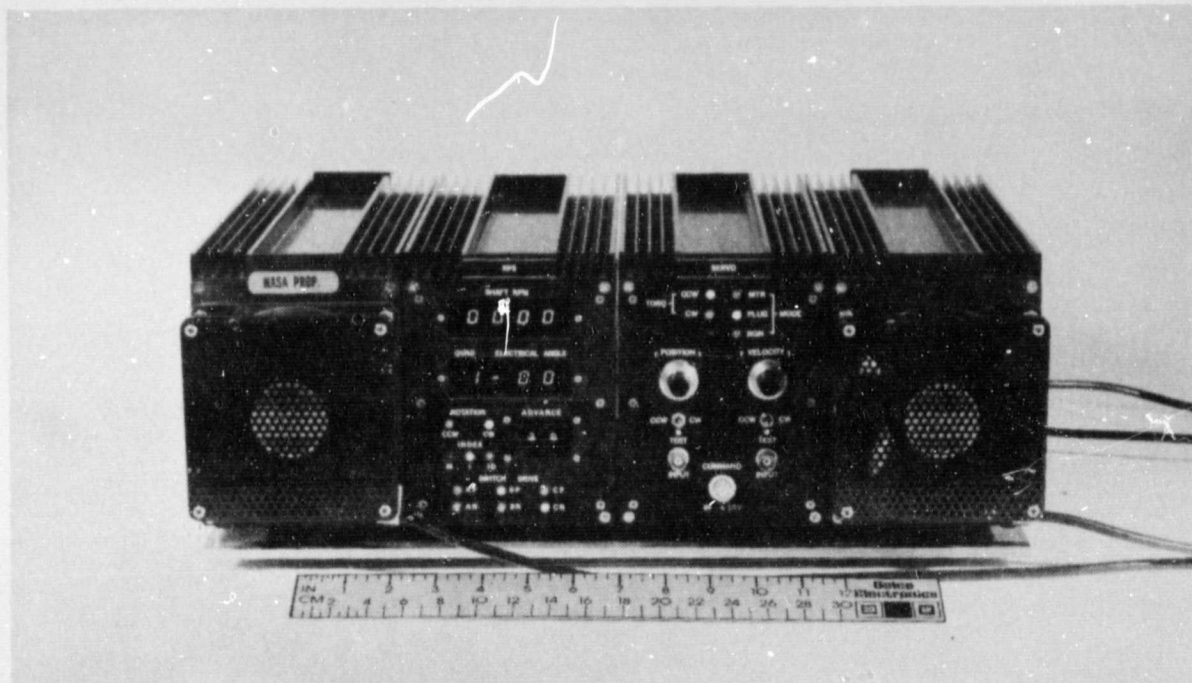


Figure 4-23. Low-Level Electronics Enclosures,
Front View

ORIGINAL PAGE IS
OF POOR QUALITY

SECTION V EQUIPMENT MECHANIZATION

5.1 ELECTROMECHANICAL ACTUATOR

The electromechanical actuator (EMA) is a positioning servo system, and its output motion is proportional to an analog input command. An idealized block diagram of the EMA is shown in Figure 5-1. Table 5-1 defines the symbols used in this diagram. Both position and velocity feedback are used for control purposes, and the motor is controlled by means of its armature current. In the idealized case, the deflection command is compared with the actual output position to provide a position error. Velocity feedback is also used, and the resulting system error signal is used to develop a motor current command. The idealized current controller forces the motor current to follow the command, resulting in motor output torque. This output torque accelerates the system inertia and produces output motion.

Figure 5-2 is a block diagram showing the actual EMA mechanization. Most of the transfer functions are self-explanatory. The definitions for the symbols used in this system are given in Table 5-1. Although most of the subsystems shown in Figure 5-2 are straightforward, several are somewhat complex, and are therefore discussed in detail in the following paragraphs.

5.1.1 CURRENT COMMAND RATE LIMITER

The current command rate limiter, shown in block diagram form in Figure 5-3, prevents sudden changes in the commanded control current.


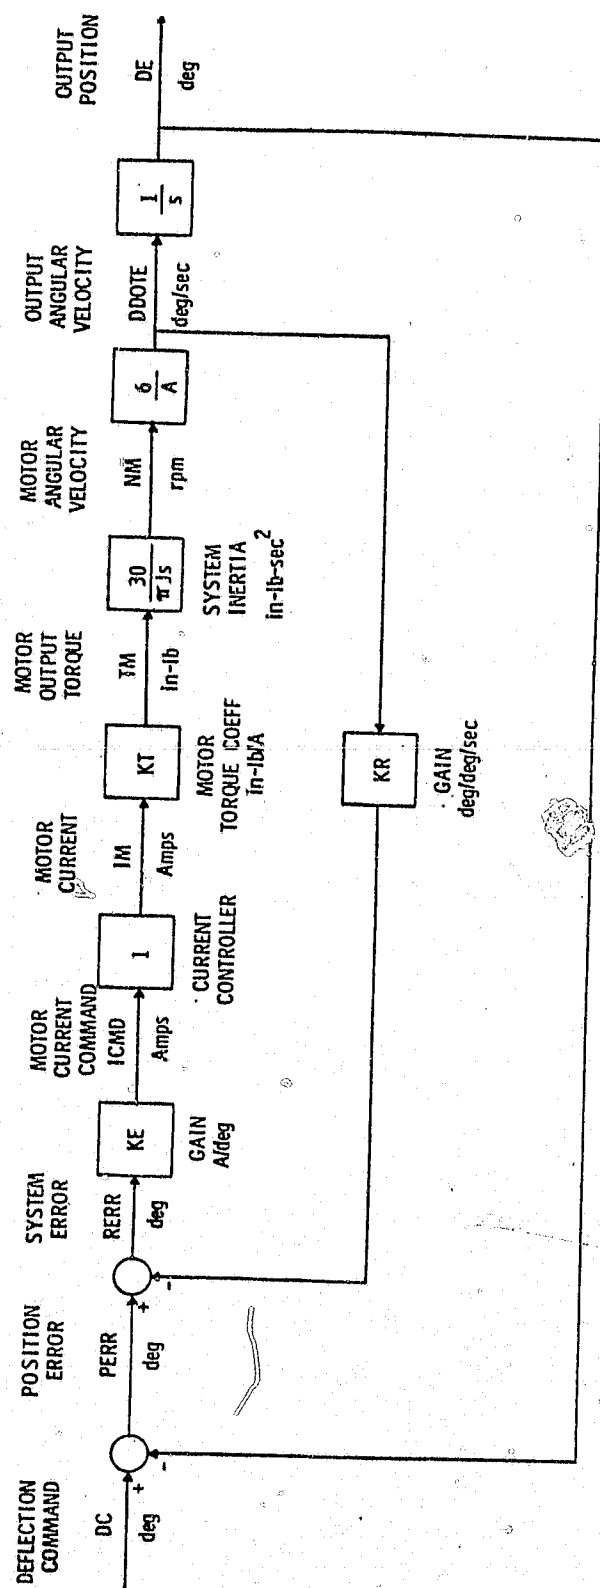


Figure 5-1. Idealized EMA Block Diagram

<u>SYMBOL</u>	<u>DEFINITION</u>
DC	Load deflection command, degrees
PERR	Load position error, degrees
DE	Load deflection angle, degrees
KE	Gain coefficient, A/degree
KR	Gain coefficient, A/r/min
K_p	Position gain, A/degree
K_v	Velocity gain, A/r/min
ICMD	Current command (prior to limiting), amperes
ICMD1	Current command (after command rate limiting), amperes
ICMDL	Current command (after amplitude limiting), amperes
IMC	Motoring current command, amperes
A_1	Gear ratio, motor-to-load deflection
A_2	Gear ratio, position pickoff potentiometer-to-load
IM	Motor current (current into inverter), amperes
DDOTE	Angular velocity of load, deg/s
τ	Dominant time constant, second

Table 5-1. Definitions

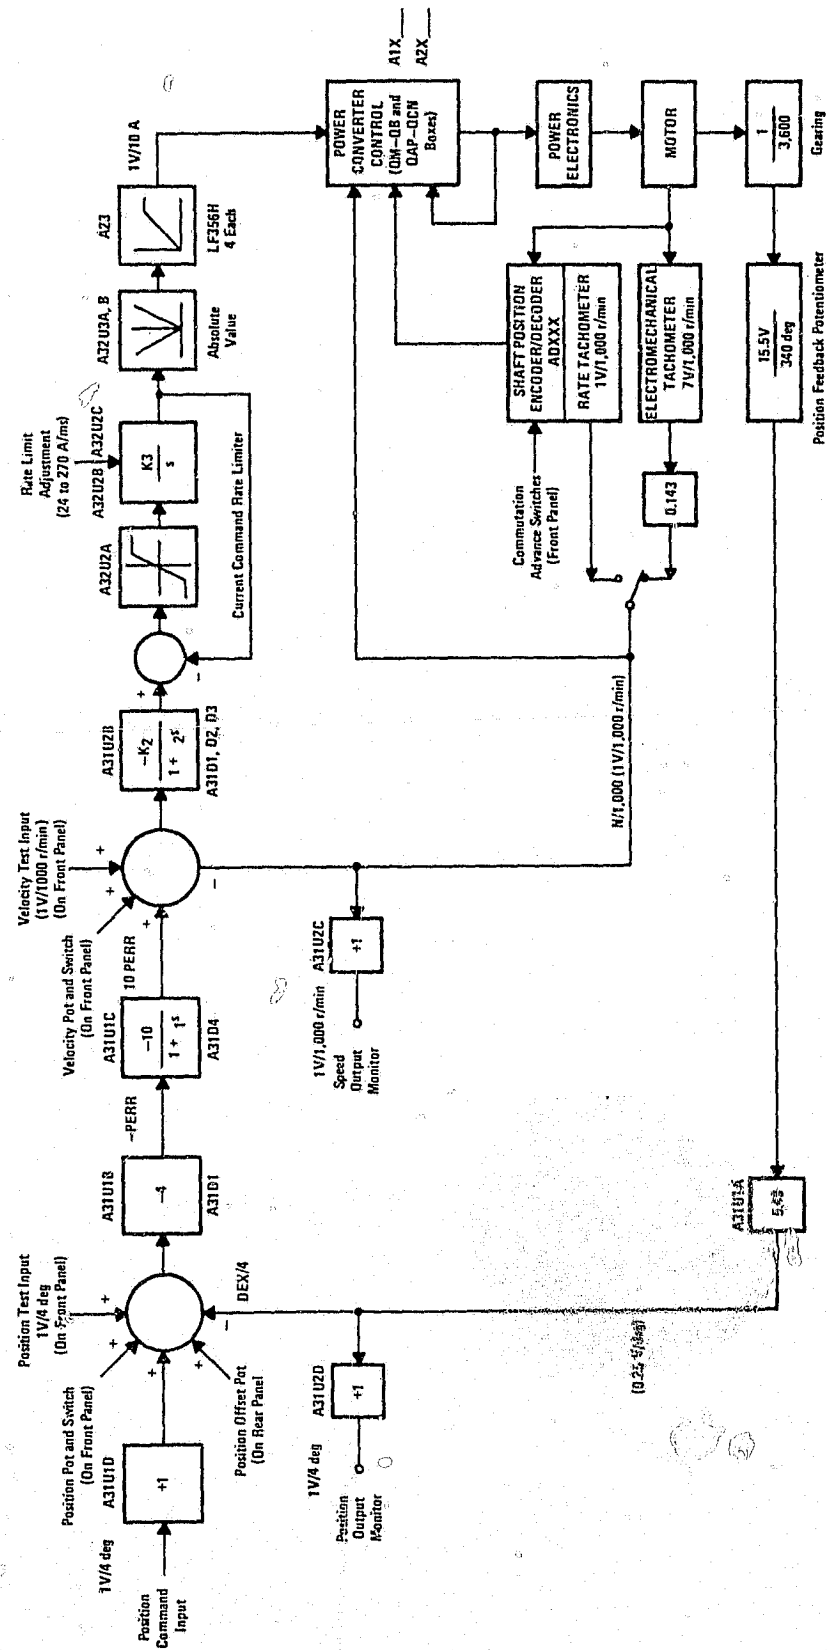

Notes: A31 prefixed parts are located on top board in servo box.
A32 prefixed parts are located on bottom board in servo box.
A23 prefixed parts are located on second board from top in the QM-QB Control Box.

Figure 5-2. EMA Mechanization Diagram

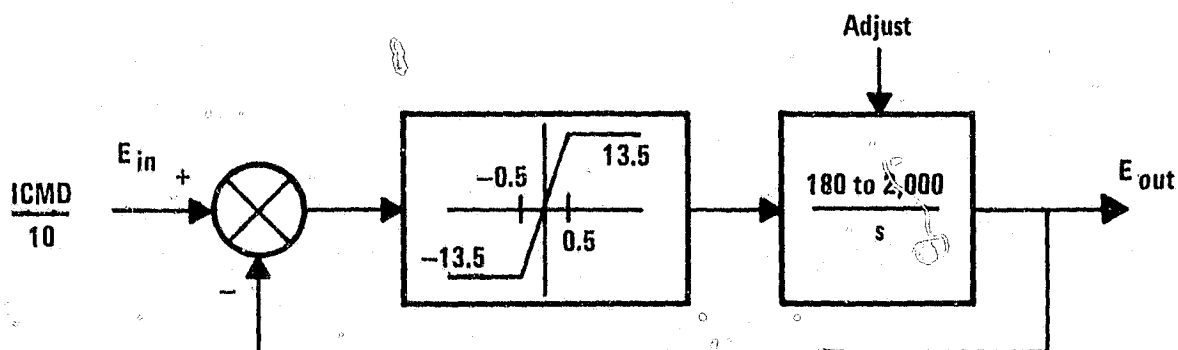


Figure 5-3. Adjustable Current Command Rate Limiter

When the system is operating in its linear region, its transfer function is

$$\frac{E_{out}}{E_{in}} = \frac{1}{1+Ts}$$

where

$$T_{min} = \frac{1}{27(2,000)} = .000019$$

and

$$T_{max} = \frac{1}{27(180)} = .00021$$

When limiting action takes place (if, for example, a sudden large change in current command occurs) the output voltage changes at a rate given by

$$\dot{E}_{out\ max} = 13.5 \times 2,000 = 27,000\ V/s$$

$$\dot{E}_{out\ min} = 13.5 \times 180 = 2,430\ V/s$$

With the scaling used in this circuit, 1 V represents 10 A; therefore, the current command rate limit is

$$i_{\text{command max}} = 10 \times 27,000 \text{ A/s} = 270 \text{ A/ms}$$

and

$$i_{\text{command min}} = 10 \times 2,430 \text{ A/s} = 24.3 \text{ A/ms}$$

5.1.2 SYSTEM OPERATING MODES

The EMA operates in three different modes:

- Motoring,
- Plugging,
- Regenerating.

These basic operating regions are illustrated in Figure 5-4. In the first quadrant, the torque produced by the machine is in the same direction the rotor is turning, resulting in normal motoring operation. If the motor is operating at low speed in the second quadrant, the motor torque opposes the velocity, and plugging operation

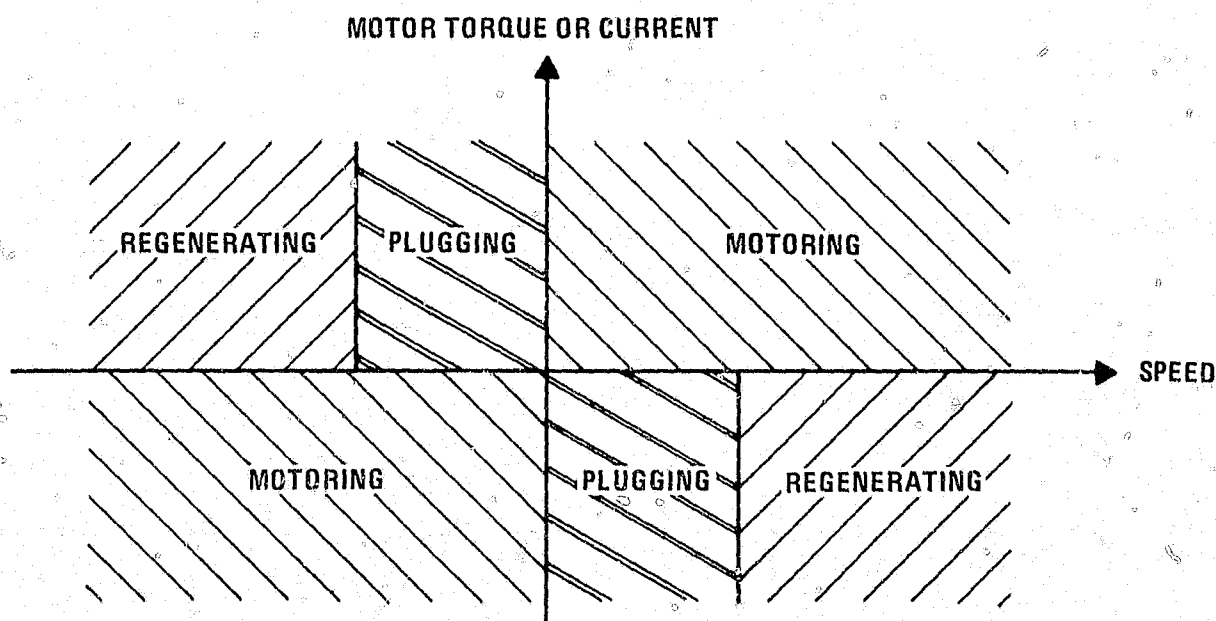


Figure 5-4. EMA Operating Regions

results. At higher speeds in the second quadrant, a regenerative braking mode is used during which energy from the system is returned to the battery. Similar modes are indicated in Figure 5-4 for the third and fourth operating quadrants.

Since the EMA operates somewhat differently in each operating region, it is necessary for the low-level control circuits to establish which region is currently being encountered. This is accomplished by comparators that establish which one of the following speed regimes (as illustrated in Figures 5-5 and 5-6) exists:

- $|N| < |X|$ (where $X \approx 400$ r/min)
- $|N| > |X|$
- N is CW
- N is CCW

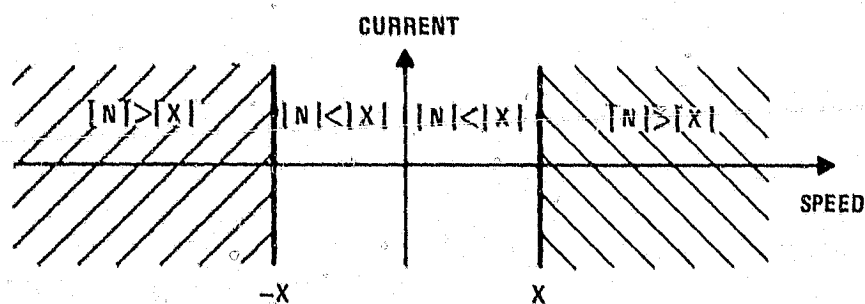


Figure 5-5. $|N| < |X|$ and $|N| > |X|$

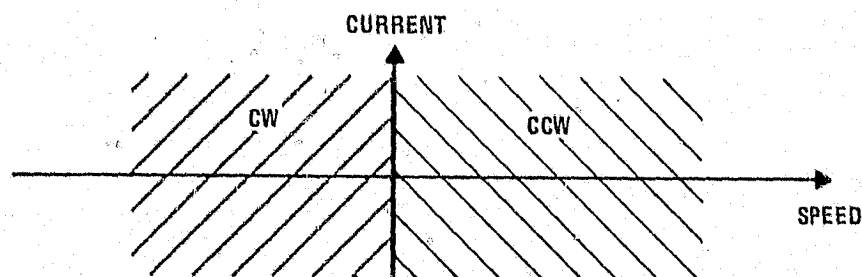


Figure 5-6. NCCW and NCW Conditions

In addition, the current command is tested by a comparator to establish which of the following regimes (as illustrated in Figure 5-7) is active:

- TCCW
- TCW

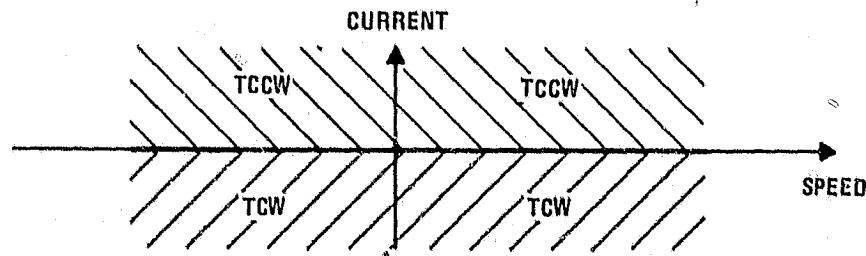


Figure 5-7. TCCW and TCW Conditions

The regenerative and plugging modes are then determined using the following Boolean relationships:

$$RGN2 = TCCW \cdot NCW \cdot |N| > |X|$$

$$RGN4 = TCW \cdot NCCW \cdot |N| > |X|$$

$$RGN = RGN2 + RGN4$$

$$PLUG2 = TCCW \cdot NCW \cdot |N| < |X|$$

$$PLUG4 = TCW \cdot NCCW \cdot |N| < |X|$$

$$PLUG = PLUG2 + PLUG4$$

5.2 POWER ELECTRONICS MECHANIZATION

The power electronics for the EMA consists of the three major subsystems described in the following paragraphs.

5.2.1 HIGH POWER MOTOR DRIVER

The schematic diagram of the motor drive circuit is given in Figure 5-8. The inverter uses six power transistors (QAP, QAN, QBP, QBN, QCP, and QCN). During motoring, the current through the motoring inductor, LM, is controlled by the two motoring chopper transistors, QM1 and QM2. It is possible to drive QM1 and QM2 in several ways, but in this system they are time-shared, operating alternately. Braking current through LB is controlled by the two braking chopper transistors QB1 and QB2. Noninductive current viewing resistors (CVRs) are used to sense currents IMB, IAN, IBN, and ICN. Motoring and braking control circuits use the signals from these CVRs for control purposes.

In mechanizing the power switches, several alternatives were considered. The use of paralleled devices would require that they all turn on and off simultaneously. The required matching of turn-on, storage, and static operating characteristics is very difficult to achieve, thus making it desirable to avoid the use of paralleled devices. The use of Darlington's in parallel creates further problems, because the input stage must absorb most of the high energy associated with turn-off if the device is operated in a saturated mode. For these reasons, it was clear that the use of a single, large-geometry device was most desirable in mechanizing the power switch. Three very different large-geometry devices were tested for use in this application. Of the three devices tested, two were found suitable for the EMA switching. However, the Westinghouse D60T type transistor was selected because its characteristics were slightly better than the other device for the EMA application.

5.2.2 BASE DRIVER POWER SUPPLY

The schematic diagram of the base driver power supply is given in Figure 5-9. The output of the circuit is a 250 kHz square wave (QDRIVE and $\overline{\text{QDRIVE}}$) which is used to control the currents in the base driver circuit (described in the next paragraph). The output is transformer-coupled through T1. The primary of T1 is center-tapped, and this point is connected to the 28 Vdc supply. In operation, the two ends of T1's primary are alternately driven toward ground by the power FETs. Q1 through Q3 operate in parallel to drive one side of T1, while Q4 through Q6 drive the other side of T1. The FETs are excellent devices for this application, since they are easily driven by CMOS logic buffers, are very fast, and tend to act as a current sink. The hex buffer U1 drives the FETs, and the amount of drive which is provided is controlled by potentiometer R8. R8 thus controls the base drive for the D60T transistors. Zener diodes CR7 and CR8 assure that the drain voltages on the FETs cannot exceed 75V. Diodes CR10 and CR11 assure that the logic signals driving the hex buffer U1 do not exceed safe input limits for U1. The input control signals (QIN and $\overline{\text{QIN}}$) are square waves with an exact 50% duty cycle established by counting down a higher frequency waveform.

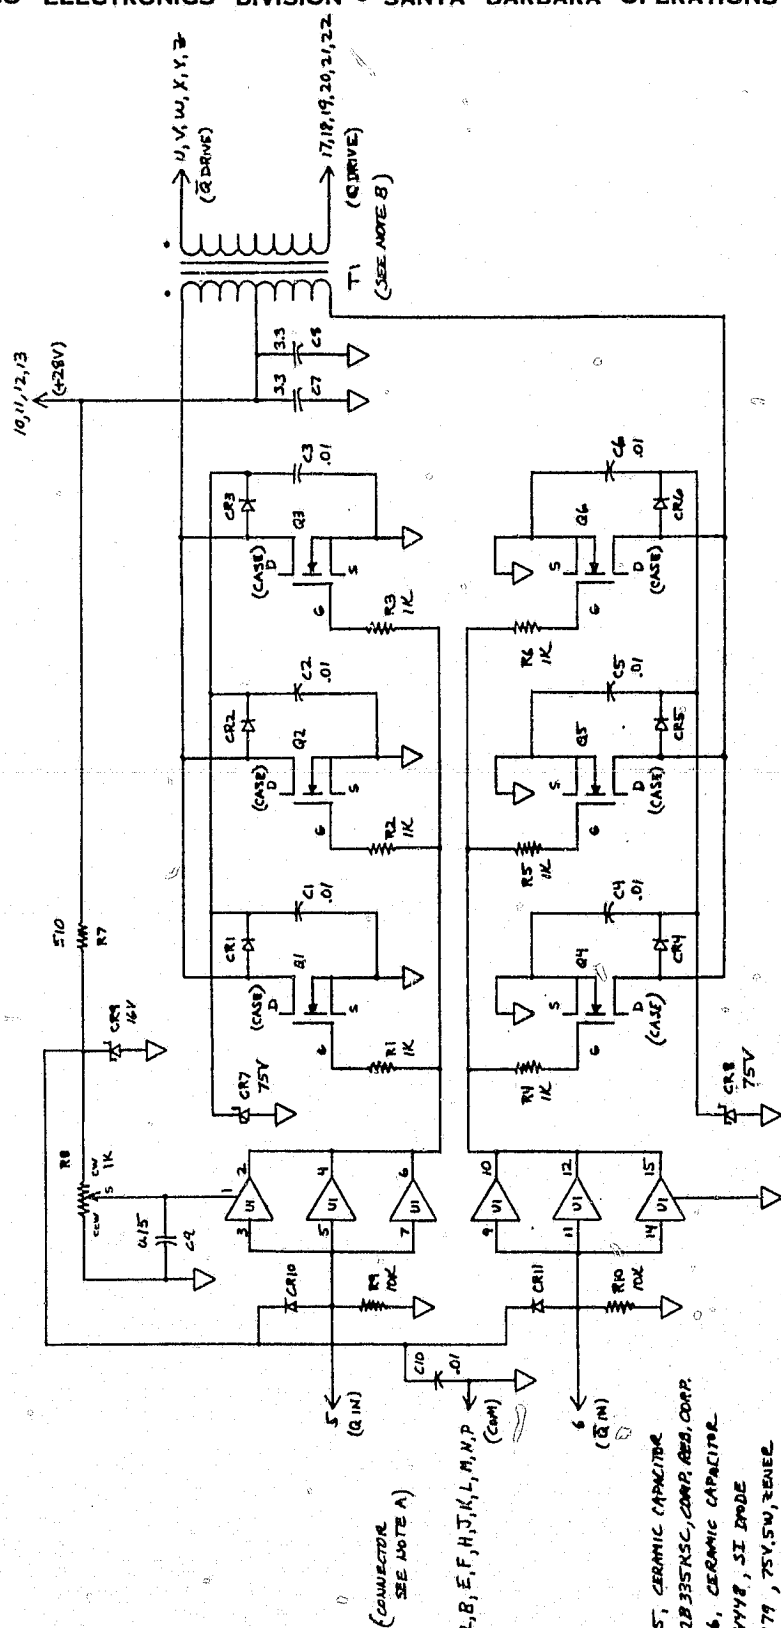


Figure 5-9. Base Driver Power Supply

R79-2

ORIGINAL PAGE IS
OF POOR QUALITY

PARTS LIST

- C1-C6, C10 0.01µF, CKD5, CERAMIC CAPACITOR
- C7, C8 33µF/50V N12B35KSC, COMP. ABS. CORP.
- C9 0.15µF, CK06, CERAMIC CAPACITOR
- CR1-CR6, CR10, CR11 1N4448, SI DIODE
- CR7, CR8 1N4979, 75V, 5W, ZENER
- CR9 1N5518B, 14V, 1W, ZENER
- R1-R6 1K, 1/4W, 5%, CARBON RESISTOR
- R7 510, 1W, 5% " "
- R8 1K, 20W, TRIMPOT, BOARNES, 325W-1-102
- R9, R10 10K, 1/4W, 5%, CARBON RESISTOR
- Q1-Q6 2N6658, VHSFET, SILICONIX, TO-3
- U1 CP4050BE, CMOS, RCA

NOTES

- A. MATING CONNECTOR, ELCO 90-6007-044-450-013
- B. T1 IS DELCO DESIGN XT77008
- C. U1-PIN 13, 16, NO CONNECTION ALLOWED
- D. Q1-Q6 MOUNTED ON ANHM #36-135-703 HEATSINK WITH WAREFIELD 177-3-62 8x8 INSULATOR AND THERMAL COMPOUND

5.2.3 BASE DRIVER CIRCUIT


The schematic diagram of the base driver circuit is given in Figure 5-10. This circuit uses the QDRIVE and $\overline{\text{QDRIVE}}$ signals from the base driver power supply, and an RF drive signal for control. The RF drive signal is a 500 kHz waveform, synchronous with the 250 kHz QDRIVE waveform. When the RF drive signal is present, the base driver turns on the power transistor it controls. When the RF drive signal is absent, the base driver turns the power transistor off.

The QDRIVE waveforms are coupled into the circuit through transformers T1 and T2. The rectified outputs of these transformers result in a nominal 4 V across capacitors C1 through C4, and 10 V across C5 and C6. When the RF drive signal is present, transistors Q1 and Q4 are turned on. The turn-on of Q1 results in Q2 and Q3 being turned on, thus placing a positive voltage on the base of the power transistor which is being driven by the circuit. While the RF drive signal is present, Q4 is on, and Q5 and Q6 are off. When the RF drive signal is removed, Q4 turns off, and Q5 and Q6 are turned on. This causes the base of the power transistor to be about -10 V with respect to its base, thus turning it off.

The driver provides excellent control of the power transistor. At turn-on, the base-emitter voltage rises very quickly, and the base current rises rapidly. After turn-on, the driver maintains a base current into the power transistor of about 15 A to assure that the power transistor remains conductive. At turn-off, the base is rapidly driven to -10 V, and the base charge is quickly removed to minimize turn-off time. Diodes CR1 and CR2 provide the base drive current during the "on" state. Schottky rectifiers have been selected for this application to minimize circuit losses.

5.3 POWER CONVERTER CONTROL

The power converter performs two major functions. It controls the magnitude of the motor current, and (during motoring or plugging) allows current to flow in the correct pair of windings to provide proper torque for the load. The power converter control methods are discussed in the following paragraphs.



5.3.1 CURRENT PROTECTION

In order to achieve adequate protection for the ten power circuit transistors in the event of a power converter control failure, currents are sensed in four locations. Chopper current is sensed by the IM current viewing resistor (CVR). The three negative phase currents, IAN, IBN, and ICN are sensed by CVRs in the emitter circuits of QAN, QBN, and QCN, respectively. There are separately adjustable positive and negative limits for IM, corresponding to motoring/plugging and regenerating protection, respectively. IAN, IBN, and ICN share another adjustable pair of positive and negative limits.

If operative peak currents exceed any one of the limits, within approximately one microsecond the base drive to all transistors is inhibited and an indication of which limit was exceeded is given on the rear panel of the QAP-QCN box or the QM-QB box. Protection limits, which may be checked on the rear panel of the appropriate box, are normally set at 100 amperes.

The only action taken when a current limit is exceeded is the inhibition of base drive. Reset for resumption of normal operation must be accomplished manually by depressing the reset button located on either of the aforementioned boxes. It is not mandatory, but it is safer if this is done with the high voltage removed from the power circuit.

5.3.2 CHOPPER CONTROL

In controlling the QM1 and QM2 choppers for motoring or plugging and the QB1 and QB2 choppers for regenerating, comparators are used to determine whether the motor current is greater or less than the commanded value. The motoring transistor comparator is in its high state if the motor current, IM, is less than the commanded value, IMC. In equation form this is related by

$$QMC \rightarrow |IM/10| < |IMC/10|$$

For plugging control the equation becomes

$$QMC \rightarrow 2|IMX/10| < |IMC/10|$$

|IMX| is the absolute value of the greatest phase current as sensed by IAN, IBN, or ICN CVRs. Similarly, the braking transistor comparator described by

$$QBC \rightarrow |IM/10| > |IMC/10|.$$

The two comparators used for chopper control employ adjustable hysteresis to reduce chopper sensitivity to noise. The amount of hysteresis used controls the chopper operating frequency. The hysteresis being used corresponds to about 6 amperes at IM. The peak operating frequency is under 10 kilohertz.

QMC and QBC toggle flip-flops each time they go from 0 to 1. The complementary output of each flip-flop Q and \bar{Q} are logically ANDed with QMC or QBC to form the logic drive signals for the four chopper transistors.

In equation form these are related by

$$QM1 \rightarrow Q_1 \cdot QMC$$

$$QM2 \rightarrow \bar{Q}_1 \cdot QMC$$

$$QB_1 \rightarrow Q_2 \cdot QBC$$

$$QB_2 \rightarrow \bar{Q}_2 \cdot QBC$$

5.3.3 ROTOR POSITION SENSOR/TACHOMETER

An optical encoder which is connected directly to the EMA motor shaft is used for shaft position sensing for commutation control and for generating a shaft velocity signal. A description of the requirements for this device and a suitable decoding mechanization for its use are given in the following sections.

5.3.3.1 ENCODER ENVIRONMENTAL REQUIREMENTS

The design goal is for the encoder to be capable of meeting the operating performance requirements during and after exposure to any feasible combination of the following environmental conditions:

Pressure	Maximum: 15.23 lb/in ² (a)
	Minimum: 10 ⁻¹⁰ Torr

Temperature	Ambient: -40°F to $+200^{\circ}\text{F}$
Humidity	Ambient: 0 to 100%
Vibration	Excitation acting along each of three orthogonal axes: +6dB/octave from 20 to 60 Hz; constant at $0.025\text{g}^2/\text{Hz}$ to 300 Hz; +6dB/octave from 300 to 700 Hz; constant at $0.15\text{g}^2/\text{Hz}$ to 2000 Hz
Acceleration	Excitation acting along each of three orthogonal axes: + 5g and - 5g for a minimum of 5 minutes

This environment is suitable for the use of hermetically sealed components and hermetically sealed CMOS or low power Schottky logic, silicon photo diodes, and light emitting diodes in ceramic and metal or glass and metal packages. An optical encoder constructed with these components in a sealed enclosure (where no condensation could take place) is certainly potentially capable of meeting environmental needs. Other needs are a suitable output code and error-free output with input shafts speeds up to 10,000 r/min. While it is clear that an encoder can be designed to meet all needs, this phase of the EMA development program used an optical encoder with much more restrictive environmental capability with respect to pressure, temperature, and humidity:

Pressure	Unspecified
Temperature	$+32^{\circ}\text{F}$ to $+155^{\circ}\text{F}$
Humidity	Ambient: 0 to 98% (no condensation)

5.3.3.2 ENCODER ELECTRICAL REQUIREMENTS

When operating the four-channel EMA developed during the earlier phase, it was observed that motor phase current waveforms were strongly dependent upon commutation angle. It was concluded that good resolution of this angle would be

highly desirable. Accordingly, one electrical degree (one-fourth of a mechanical degree) was set as a requirement. Furthermore, proper operation to 10,000 r/min, as confirmed by the manufacturer's testing, was set as another requirement.

Since the decoded output of the encoder must have absolute shaft position information some sort of indexing output was required of the encoder. In other respects the particular coding format was left open.

5.3.3.3 SELECTION OF THE ENCODER

In general optical encoders have the following four different output formats, and combinations thereof;

- Analog incremental,
- Analog absolute,
- Digital incremental,
- Digital absolute.

Analog output types were felt to be undesirable because of restrictions in capability and poor noise immunity. A digital absolute type is most attractive because it requires less decoding logic than does the digital incremental. It was found, however, that a major development was necessary to build a digital absolute encoder with both the required resolution and top operating speed.

Thus the encoder selected was a digital incremental type with a single index bit. An industry standard type was procured, which provides quadrature squarewaves on two channels at 360 cycles per revolution and a single index bit of 1/1,440 duty cycle per revolution.

5.3.3.4 DECODING TECHNIQUE

Since the type of digital encoder used is not an absolute type, shaft position at system startup is unknown. Thus the motor, at start up, is operated in a stepping mode until the index is found. Whenever the index, Channel I, is a one, the absolute shaft position is known. For all other shaft positions, decoding is accomplished by counting transitions of the quadrature A and B waveforms. There are 1,440 counts per mechanical revolution.

A simplified block diagram of the mechanization of the commutation decoding is given in Figure 5-11. A corresponding timing diagram is given in Figure 5-12. The mechanization is based upon the use of up/down counters to provide shaft position information in between index, I, pulses. The commutation angle may be adjusted from 1 to 58 degrees advance by means of a selection switch on the front panel of the RPS decoder box.

By a somewhat similar mechanization, shaft position relative to the index, I, is decoded and then displayed with quadrant, sign, and angle information. There is also digital-to-analog conversion of this information so that shaft position is indicated with a triangular wave having a scaling of 10 degrees mechanical per volt in the format shown in Figure 5-12. This signal is available on the rear of the RPS decoder box.

5.3.3.5 VELOCITY SIGNAL

A velocity signal is derived from the optical encoder by converting its output frequency to voltage. Figure 5-13 is a diagram of this subsystem. Pulses are generated at both the positive and negative going transitions of A and B phases of the encoder output. Each phase has 360 cycles per revolution; thus the maximum pulse frequency is given by

$$\begin{aligned} f_{\max} &= 2 \times 2 \times 360 \times 9,000 / 60 \\ &= 216,000 \text{ Hz} \end{aligned}$$

The frequency is divided by two to scale it for the full range of the F to V converters used. Output is bidirectional and scaled for N/1,000 r/min.

This derivation of a velocity signal has been shown to work reasonably well in spite of its inherent output granularity (2 degrees, electrical) and ripple at low speed. Use of higher frequency V to F converters and elimination of the divide-by-two stage would give a 50% reduction in granularity and ripple.

The EMA is configured such that an alternate velocity signal may be obtained from an electromechanical tachometer simply by removing the rate tachometer

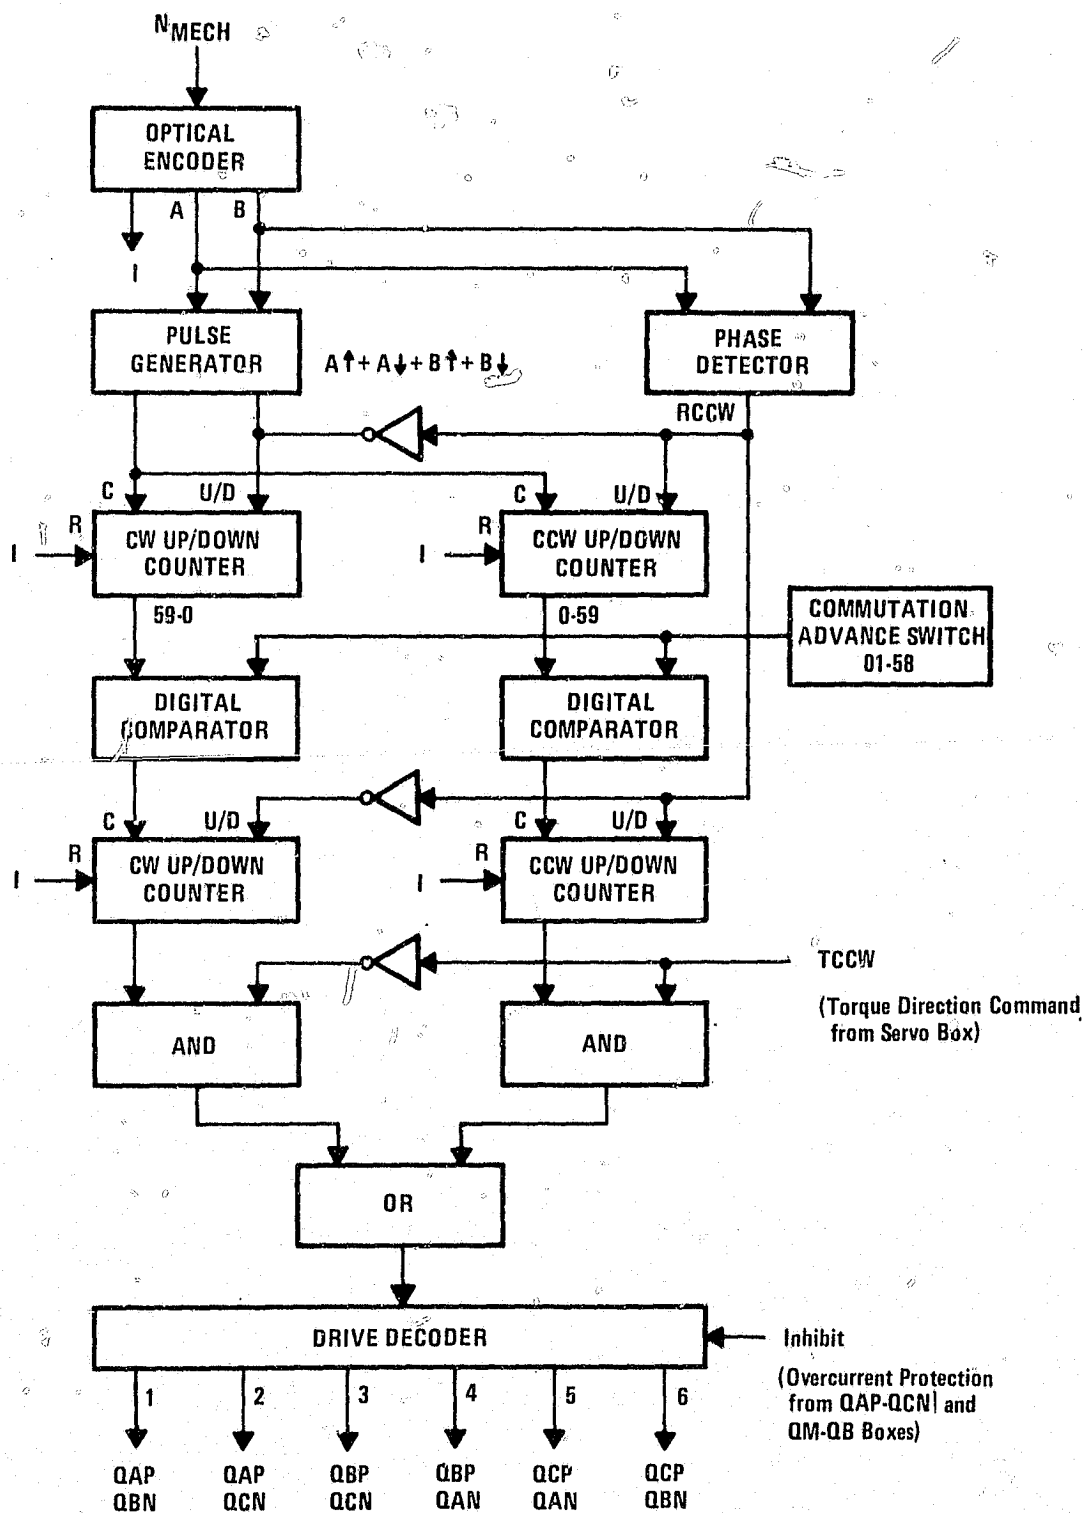



Figure 5-11. Derivation of Commutation Decoding from the Optical Encoder



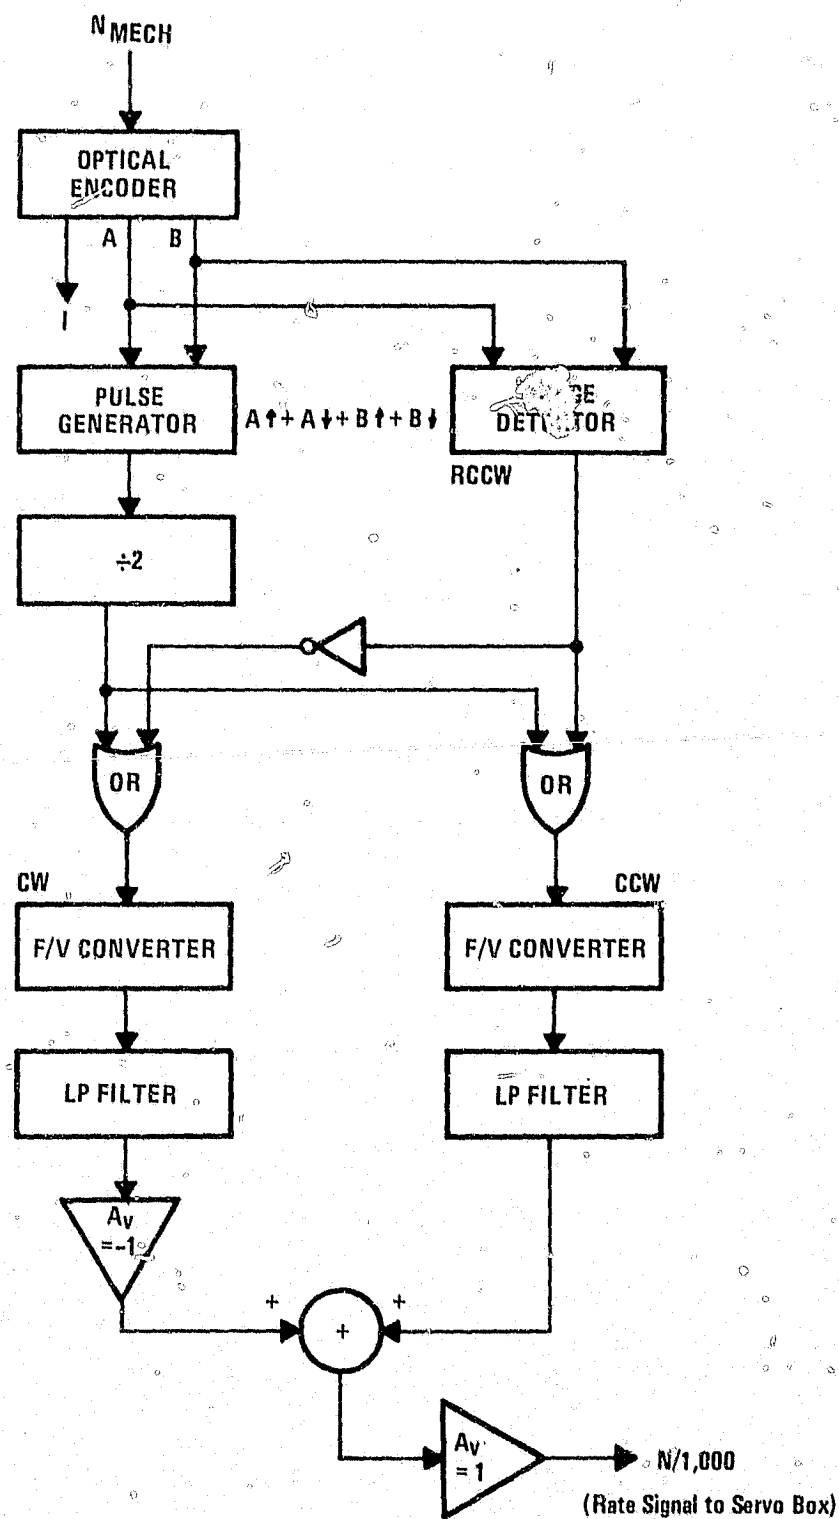


Figure 5-13. Derivation of Velocity (Rate) Signal from the Optical Encoder

dummy plug and inserting the electromechanical tachometer plug. With this operation a scaling network is connected to the electromechanical tachometer's output such that scaling is N/1,000 volts, just as is the rate tachometer scaling.

A digital readout of motor r/min is given on the front panel of the RPS decoder box. This readout is derived from the encoder output frequency by means of a simple frequency counter.

5.3.4 MONITORING POINTS AND CONTROLS

The following four sections convey features of the four low level, black boxes. The boxes are considered with regard to their visual indicators, controls, input signals, and output signals.

5.3.4.1 THE RPS DECODER BOX

The RPS decoder box has the following front panel features:

- Digital display of motor r/min (derived by digital count of the encoder output pulses).
- Digital display of motor shaft position in electrical degrees.
- CCW and CW indicators - indicate instantaneous direction of shaft rotation.
- M indicator - indicates a missing index pulse from the encoder, and is extinguished when the motor has turned sufficiently far so that the index is found.
- I indicator - indicates the shaft is in the index position.
- ID indicator - indicates the shaft is in the index position or was less than approximately one second earlier.
- Advance - thumbwheel switches adjust commutation timing and must be set between 01 and 58 (degrees, electrical); normally set at 20 (degrees, electrical).
- Switch Drive indicators - on when base drive is available for the particular transistors indicated (i.e. QAP-QCN).

The rear of the RPS decoder box contains the following four monitor points:

- Position - shaft position with a waveform format as indicated in Figure 5-12.
- r/min - analog output derived from the encoder with a scaling of N/1,000 volts with positive being CCW rotation.
- 4F - pulses with a repetition rate of 4 times the channel A(or B) frequency, 216,000 pulses/s at 9,000 r/min.
- TRIG - a trigger pulse derived from the encoder's index, 1 pulse/mechanical revolution.

5.3.4.2 THE SERVO AMPLIFIER BOX

The front panel servo amplifier box has the following features:

- Torque, CCW, and CW indicators - indicate direction of commanded torque.
- Mode, motor, plug and regenerate indicators - indicate commanded mode of operation.
- Position potentiometer and switch used to provide a manually controlled position command, CCW with switch in CCW position or CW with switch in CW position. Normally the pot is out of the circuit, with the switch in the center (off) position (may be used for position offset).
- Velocity potentiometer and switch - used to provide a manually controlled velocity command, CCW with the switch in the CCW position or CW with the switch in the CW position. Normally the pot is out of the circuit, with the switch in the center (off) position (may be used for velocity offset).
- Command In - the main position command input (scaling: 4^0 output per volt command).

The rear of the servo amplifier box contains the following:

- Rate Limit adjustment - used to adjust the maximum rate-of-change of command current (min CCW is 25A/ms, max CW is 250A/ms).
- Position Zero adjustment - used to adjust output deflection for zero.
- Position Output - output position analog signal, 4^0 /volt, DE.
- Speed Output - output velocity analog signal, 1,000 r/min/volt, N (derived from the rate tachometer or the electromechanical tachometer).

- Tach Connector - used to connect an electromechanical tachometer or, with a dummy plug, to connect the rate tachometer derived from the optical encoder.
- Torque Command Output - used to monitor the torque command which goes to the QAP-QCN control box (scaling, 10A/volt).

5.3.4.3 THE QM-QB CONTROL BOX

The QM-QB control box has the following rear panel features:

- Drive Motor indicator - indicates when there is the availability of base drive to QM1 or QM2.
- Drive Regenerate indicator - indicates when there is the availability of base drive to QB1 or QB2.
- Overcurrent indicators - MTR indicates overcurrent in the IM CVR in the motor direction; RGN indicates overcurrent in the IM CVR in the regenerating direction; SYS indicates a protection shutdown caused by overcurrent in the IM CVR or the AN, BN, or CN CVRs.
- Overcurrent Reset button - may be used to reset an overcurrent shutdown caused by excessive current in either direction in any of the four CVRs.
- Drive Sync output - +12V on the QM or QB connector indicates one of the QM transistors or one of the QB transistors, respectively, has base drive.
- IM/10 output - signal derived from the IM CVR (scaled 0.1V per ampere).
- Limits/10 outputs - used to monitor the protection thresholds for chopper motoring current or regenerating current, IM/10 or IR/10 ($= -IM/10$), respectively (scaled 0.1V per ampere).
- Torque Command input - connects to the torque command output signal from the servo amplifier box.

5.3.4.4 THE QAP-QCN CONTROL BOX

The QAP-QCN control box has the following rear panel features:

- Test X1 and X2 indicators - available for internal connection for test, but not used.
- Overcurrent indicators - MTR indicates overcurrent in the AN, BN, or CN CVRs in the motoring (or plugging) direction; RGN indicates overcurrent

in the same CVRs in the regenerating direction; SYS indicates a protection shutdown caused by overcurrent in the IM CVR or the AN, BN, or CN CVRs.

- Overcurrent Reset button - may be used to reset an overcurrent shutdown caused by excessive current in either direction in any of the four CVRs.
- IAN/10, IBN/10, ICN/10 outputs - signals derived from the respective CVRs (scaled 0.1V per ampere).
- Limits/10 outputs - used to monitor the protection threshold for IAN, IBN, or ICN currents in motoring/plugging or regenerating directions, IM/10 or IR/10, respectively (scaled 0.1 V per ampere).
- Test X3 output - available for internal connection for a test output but normally connected for |IMX/10| (see paragraph 5.3.1.2) monitoring.

SECTION VI

EMA OPERATING INSTRUCTIONS

6.1 SAFETY CONSIDERATIONS

All persons permitted to be in the vicinity of the EMA should be fully aware of the hazards associated with high power electronic and mechanical equipment. The voltages and currents are large and potentially dangerous. The rotating elements store large amounts of energy and are also potentially hazardous.

All reasonable precautions should be taken in setting up facilities for the EMA. Persons not familiar with the equipment should be prevented from entering dangerous areas. Adequate grounding, fused circuits and high-voltage matting should be provided. The batteries which furnish the high voltage power should be adequately ventilated and protected from accidental shorts. Cabling should be protected, and necessary fencing or other constraints should be used to keep personnel away from dangerous voltages, rotating equipment, or batteries. Warning signs should be provided for all dangerous areas. No one should work on this equipment alone. Personnel who work on the equipment should be very familiar with the life-saving techniques (such as mouth-to-mouth resuscitation) which may be required for electrical shock victims.

Battery servicing and maintenance (including filling and charging) should be accomplished by experienced personnel in accordance with the battery manufacturer's recommendations.

Clear access to power switchgear, fire extinguishers and exits should be maintained at all times. Test equipment, work tables or other similar equipment should be placed in locations which do not interfere with equipment operation nor limit access to exits or safety-related equipment.

Whenever it is necessary for personnel to be close to the power electronics or motor stand, all input power to the EMA should be disconnected. In addition,

the energy storage capacitors should be permitted to discharge. Bleed resistors automatically provide for capacitor discharge, but several minutes are required for the capacitor voltages to reach safe levels.

The 115 Vac power for the EMA should be of good commercial quality. The 28 Vdc supply must be capable of supplying at least 10 amperes, and the high voltage supply should provide 270 Vdc nominally. The 270 Vdc source should be current limited at 200 A (to prevent excessive inrush current to the energy storage capacitors). The high voltage source should never be allowed to exceed 325 volts under any conditions, since higher voltages could damage the power electronics. Appropriate voltage limiting circuits must be provided on the battery charger so that it cannot supply excessive voltage under any condition (including inadvertent operation without the battery bank connected to the EMA).

Although operating the EMA is very simple, it must be recognized that large amounts of power and energy are involved, and it is therefore essential that all personnel involved in EMA operations or maintenance use great care to make sure no unsafe conditions ever exist. During tests, it is recommended that buffered signals be used for display or recording purposes. If direct access to other signals is necessary, the operator should use great care to minimize the possibility of inadvertent shorts or disturbances that might cause excessive motor currents or other dangerous conditions.

As part of the EMA operations, all equipment should be periodically examined for loose parts, adequate clearances, and other mechanical or electrical problems. Unusual noises or other indications of erratic operation should be investigated immediately.

6.2 START-UP OPERATIONS

6.2.1 COOLING AIR

Before startup is initiated, cooling air for the EMA motor should be turned on if extensive tests at high power levels are planned.

6.2.2 INPUT COMMAND SIGNAL

The EMA input command signal is introduced through a BNC connector located on the front panel of the servo electronics enclosure. The signal is scaled to provide four degrees of EMA load motion for each volt of input command signal. The EMA load motion is nominally ± 40 degrees, hence the input command voltage range is ± 10 V. However, input signals of ± 20 V will not cause any damage to the equipment. Prior to startup, it is good practice to set the input command at zero volts.

6.2.3 TURNON

Turnon is accomplished by applying power in the proper sequence. The 115 Vac power is first applied, thus allowing the logic and low level circuits to become active. The 28 Vdc supply is then turned on to provide power for the driver elements. The 270 Vdc power is applied last, at which time the system is fully operational. It is permissible, with the system fully powered, to adjust any of the potentiometers located on the electronics enclosures. The commutation advance angle, which may be adjusted using the thumbwheel switches on the front panel of the RPS enclosure, must not be changed when the system is operating. Failure to heed this warning may result in motor power drive circuit damage.

6.3 SHUTDOWN OPERATIONS

Shutdown is achieved in the following sequence:

- Set input command to zero,
- Turn off high voltage power,
- Turn off 28 Vdc power,
- Turn off 115 Vac power,
- Turn off cooling air.

SECTION VII TESTS AND TEST RESULTS

7.1 INTRODUCTION

Several types of tests were conducted on the EMA, but all tests could basically be considered either motor performance tests or servo performance tests. The following paragraphs summarize the results obtained during the system tests.

7.2 MOTOR PERFORMANCE TESTS


The motor performance tests were conducted on Delco's dynamometer stand (shown in Figures 4-4 through 4-7). The dynamometer consists of a dc machine, its associated field and armature controls, load resistance banks, torque and speed transducers, and the necessary instrumentation and controls to allow the dynamometer either to drive the EMA motor (with the EMA machine acting as a permanent-magnet generator) or act as a mechanical load for the EMA motor.

7.2.1 COMMUTATION ANGLE CONTROL TESTS


As was indicated in Paragraph 5.1.2, the EMA control electronics allows the commutation angle to be adjusted by means of thumb-wheel switches mounted on the front panel of the rotor position sensor (RPS) electronics enclosure (see Figures 4-22 and 4-23 for photos of this equipment). Tests were conducted at several power levels to determine the effects of the commutation angle on power current waveforms and system efficiency. Table 7-1 summarizes the results of the tests. For a given power level, the commutation angle does not have a major effect on system efficiency. However, the current waveforms in the motor windings are affected significantly by the commutation angle setting (see Figure 7-1 for typical motor phase current waveforms for various commutation advance angles). At low speeds no commutation angle advance is needed, but at high motor speeds the commutation time becomes significant, and the motor current waveforms are improved by providing commutation advance.

Supply		Motor			Output Mechanical Power		Input Electrical Power (W)	System Efficiency (%)
V_s (Vdc)	I_s (A)	Advance Angle (deg)	Torque (in-lb)	Speed (r/min)	(hp)	(W)		
237	24.6	0	70.4	6023	6.73	5020	5830	86.1
237	24.5	10	70.0	6063	6.74	5025	5807	86.5
237	24.7	20	70.1	6075	6.76	5041	5853	86.1
237	24.9	28	70.0	6080	6.75	5039	5901	85.4
239	34.6	0	99.0	6064	9.53	7107	8269	85.9
238	39.6	0	116.0	5818	10.7	7990	9424	84.8
237	49.5	20	116.6	7490	13.9	10339	11731	88.1
238	40.0	28	116.0	5841	10.75	8022	9520	84.3


Table 7-1. Data from Commutation Angle Control Tests

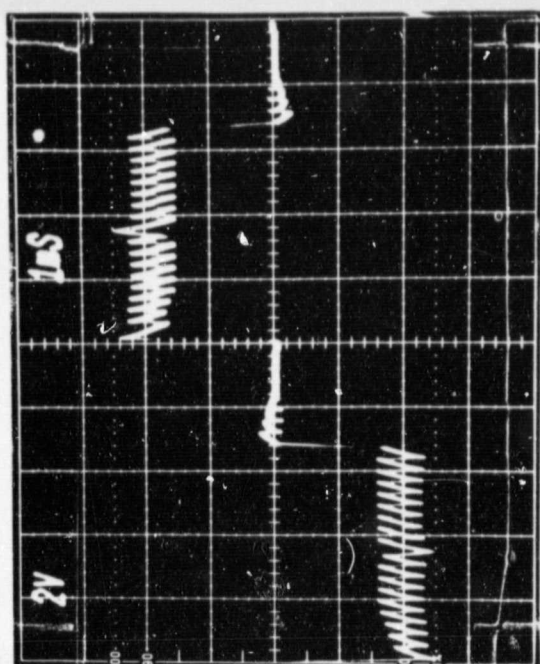


0° Advance

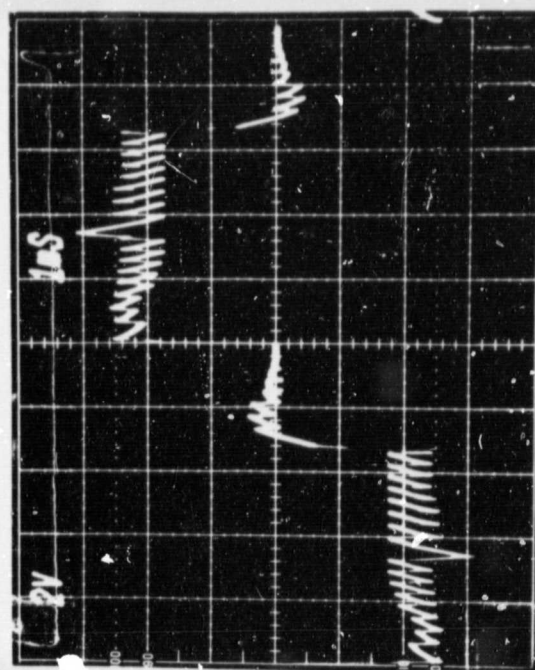

30° Advance

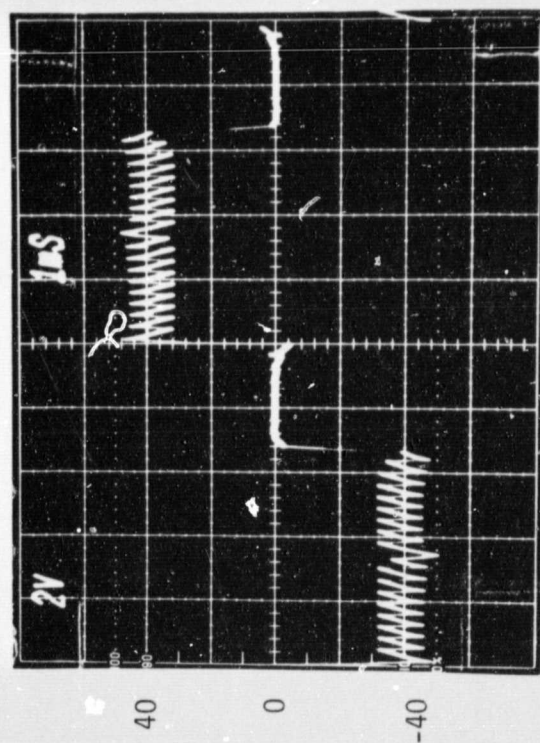

0° Advance

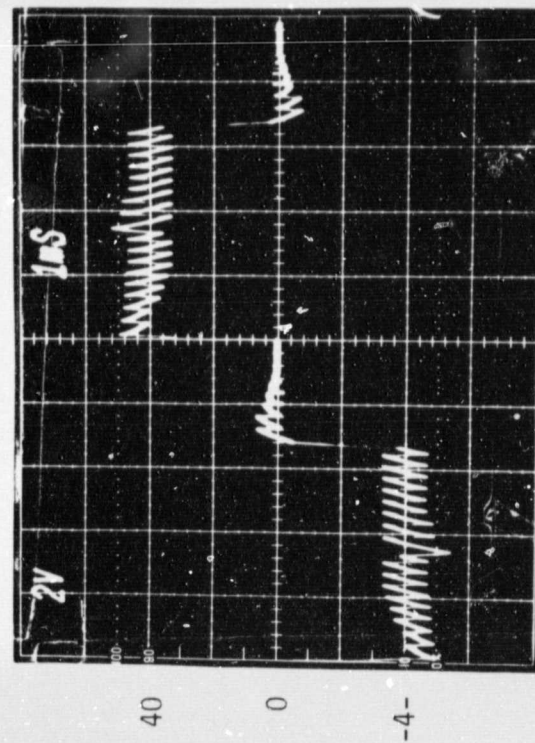

20° Advance

MOTOR
PHASE
CURRENT
(A)

MOTOR
PHASE
CURRENT
(A)

ORIGINAL PAGE IS
OF POOR QUALITY

Figure 7-1. Motor Currents for Several Commutation Angles

7.2.2 FULL POWER MOTORING TESTS

Tests were performed to evaluate the system at full rated power (17 hp). Table 7-2 summarizes the results of these tests. The "efficiency" figures shown are the ratio of mechanical output power to that provided by the high voltage supply (hence the low level electronics losses and cooling fan losses are not included in these data). The full power tests show an "efficiency" of between 86 and 88%, with almost no change in efficiency when operating at either 20° or 28° commutation angle advance.

In conducting the full power motoring tests it was noted that the peak voltage stresses on the inverter's anti-parallel diodes were approaching their ratings when operating at a supply voltage of 270 Vdc. To assure adequate margins for these devices, the supply was reduced to 240 Vdc for most of the subsequent system tests. If high power tests are to be conducted at supply voltages greater than 270 Vdc, the anti-parallel diodes in the system should be replaced with devices having reverse voltage ratings significantly greater than 400 V (the rating of the present units).

7.2.3 MOTOR TORQUE CHARACTERISTIC TESTS

The motor torque characteristic was examined to see if the output torque remained proportional to current for large currents. These tests are summarized in Table 7-3. For torques well beyond the nominal design value of 120 in-lb, the motor's torque coefficient remained about 1.9 in-lb/A, independent of output torque.

7.2.4 MOTORING TESTS

Motoring tests were conducted at torque levels of approximately 40, 80, and 120 in-lbs, using speeds of approximately 2,500, 5,000, and 7,500 r/min. The test results are summarized in Table 7-4. The nominal supply voltage for these tests was 240 Vdc, and the commutation angle was set for 20° advance.

SUPPLY		MOTOR			Output Mechanical Power		Input Electrical Power (W)	System Efficiency (%)
V_s (Vdc)	I_s (A)	Advance Angle (Deg)	Torque (in-lb)	Speed (r/min)	(hp)	(W)		
241	50.0	0	114	7,807	14.2	10,593	12,050	87.9
241	46.7	0	104	7,954	13.3	9,922	11,255	88.2
241	50.0	0	125	7,022	13.9	10,392	12,050	86.2
243	58.5	20	135	7,807	16.7	12,478	14,216	87.8
245	58.2	28	134	7,886	16.8	12,511	14,259	87.7
261	58.2	28	136	8,180	17.6	13,096	15,290	86.2

Table 7-2. Data from Full Power Motoring Tests

Supply		Motor		Control Current (A)	Torque Coefficient (in-lb/A)
V_s (Vdc)	I_s (A)	Torque (in-lbs)	Speed (r/min)		
243	1.58	20.6	1,548	11	1.87
243	2.71	40.2	1,488	20	2.01
243	4.20	59.9	1,584	32	1.87
242	5.54	80.0	1,534	44	1.82
242	7.22	100	1,559	52	1.92
241	8.83	120	1,508	63	1.90
241	9.97	130	1,541	68	1.91
241	10.74	135	1,603	70	1.93
241	11.65	140	1,678	74	1.89
240	12.90	145	1,755	76	1.91

Table 7-3. Data from Motor Torque
Characteristic Tests

Supply		Motor			Output Mechanical Power		Input Electrical Power	System Efficiency
V_s (Vdc)	I_s (A)	Current Command (A)	Torque (in-lb)	Speed (r/min)	(hp)	(W)	(W)	(%)
242	6.48	19.2	40.1	2,513	1.60	1,193	1,568	76.1
241	12.66	21.2	41.0	5,013	3.26	2,433	3,051	79.8
241	17.67	21.2	38.6	7,840	4.80	3,583	4,258	84.1
239	12.42	38.0	79.4	2,497	3.15	2,347	2,968	79.1
239	24.47	41.3	81.5	4,965	6.42	4,791	5,847	81.9
238	33.7	40.8	77.0	7,538	9.21	6,871	8,015	85.7
240	20.0	58.2	122.4	2,495	4.85	3,615	4,788	75.5
238	37.1	59.4	121.0	5,165	9.92	7,399	8,832	83.8
236	49.95	60.4	117.1	7,473	13.89	10,360	11,788	87.9

Table 7-4. Data from Motoring Tests

7.2.5 REGENERATION TESTS

Tests were also conducted with the EMA operating in the regenerative mode. In this case the dynamometer acted as a driving motor, and the EMA machine operated as a permanent magnet generator. Again, torque levels of approximately 40 and 80 in-lbs were used, but, with current commands limited to slightly over 60A, the regenerative torque was limited to slightly over 100 in-lbs. Nominal speeds of 2,500, 5,000, and 7,500 r/min were used in these tests. The test results are shown in Table 7-5.

7.2.6 EMA TORQUE CONTROL TESTS

Torque control tests were conducted on the EMA at several current levels. In these tests a constant current command was applied, and torque measurements were made as the system went through its motoring, plugging, and regenerative modes. The test data from these runs are presented in Table 7-6.

Supply		Motor			Input Mechanical Power		Output Electrical Power	System Efficiency
V_s (Vdc)	I_s (A)	Current Command (A)	Torque (in-lb)	Speed (r/min)	(hp)	(W)	(W)	(%)
240	-3.85	21.8	40.2	2,536	1.62	1,206	924	76.6
240	-7.70	21.0	40.1	4,956	3.15	2,353	1,847	78.5
242	-11.96	20.5	40.6	7,535	4.86	3,622	2,893	79.9
241	-7.44	44.8	80.3	2,533	3.23	2,408	1,793	74.5
242	-16.96	44.98	81.1	5,041	6.49	4,840	3,934	81.3
246	-24.59	43.98	81.2	7,576	9.76	7,283	6,048	83.0
242	-8.55	59.97	100.5	2,506	4.00	2,981	2,069	69.4
244	-19.17	58.45	99.8	5,008	7.93	5,917	4,677	79.0
244	-29.8	57.98	100.1	7,473	11.9	8,856	7,269	82.1

Table 7-5. Data from Regeneration Tests

Current Command (A)	Motor Torque (in-lb)	Motor Speed (r/min)	Control Mode
21.5	40	1,000	REGENERATING
	39.8	750	
	39.8	500	
	81.9	260	PLUGGING
	101	336	
	62	200	
	33	100	
	28	60	
	29	0	
	48.5	100	MOTORING
40.3	73.3	1,000	REGENERATING
	73.6	750	
	74.3	500	
	99.1	320	PLUGGING
	82	260	
	65	196	
	47	105	
	87	135	MOTORING
	86	200	
	86	300	
62.0	106	750	REGENERATING
	107	640	
	107	620	
	110	560	
	105	527	
	99	489	
	92	450	
	104	330	PLUGGING
	114	377	
	122	410	
	125	426	
	128	445	
	77	202	
	62	87	
	60	40	
	130	320	MOTORING
	130	200	

Table 7-6. Data from Torque Control Test

7.2.7 MOTOR SPEED ANOMALY

During the motor tests it was found that the motor could not be driven at speeds greater than about 8,300 r/min. At very light loads the maximum obtainable speed was slightly lower (7,800 - 8,000 r/min). At the present time, the reason for the speed limitation is not clear. It may be caused either by some limitation of the electronics or by a combination of the motor and electronics, but time restrictions have prevented any extensive investigation of this anomaly.

7.3 SERVO PERFORMANCE TESTS

The servo performance tests were conducted with the EMA disconnected from the dynamometer. The gearbox was attached to the motor assembly (as shown in Figures 4-15 and 4-16.)

7.3.1 FREQUENCY RESPONSE TESTS

Frequency response tests were conducted using an EMR 1410 Frequency Response Analyzer and an HP 7404A Recorder. The velocity and torque limits of the machine limit the amplitude of the motion (see pages 6-15 through 6-19 of Delco Report R78-1 for an analysis of these effects). For an ideal system with a torque limit of 120 in-lbs, a velocity limit of 9,000 r/min, an inertia of 0.006 in-lb-s², and a gear ratio of 2,700:1, the amplitude of the output which produces velocity limiting is given by

$$A_v = 3.18/f \quad (\text{deg})$$

where f is the frequency of the motion in Hz. Similarly, the torque (or acceleration) limit results in an amplitude limit of

$$A_a = 10.75/f^2 \quad (\text{deg})$$

At low frequencies, velocity limiting dominates, and at higher frequencies (ideally, above 3.4 Hz) acceleration limiting restricts the output motion. In the actual hardware, backlash, time lags and other effects limit the output motion still further.

Because of these nonlinear effects, when frequency response measurements are made it is desirable to limit the output travel to amplitudes that enable the EMA to operate in a reasonably linear manner. In the frequency response tests conducted, the input command was varied as a function of the frequency being used, and the readings of amplitude and phase for both the input and output were recorded.

Frequency response data were obtained for several system gains and with several different time constants for the dominant system lag (the filter for the position error signal). A typical frequency response is shown in Figure 7-2. For this run,

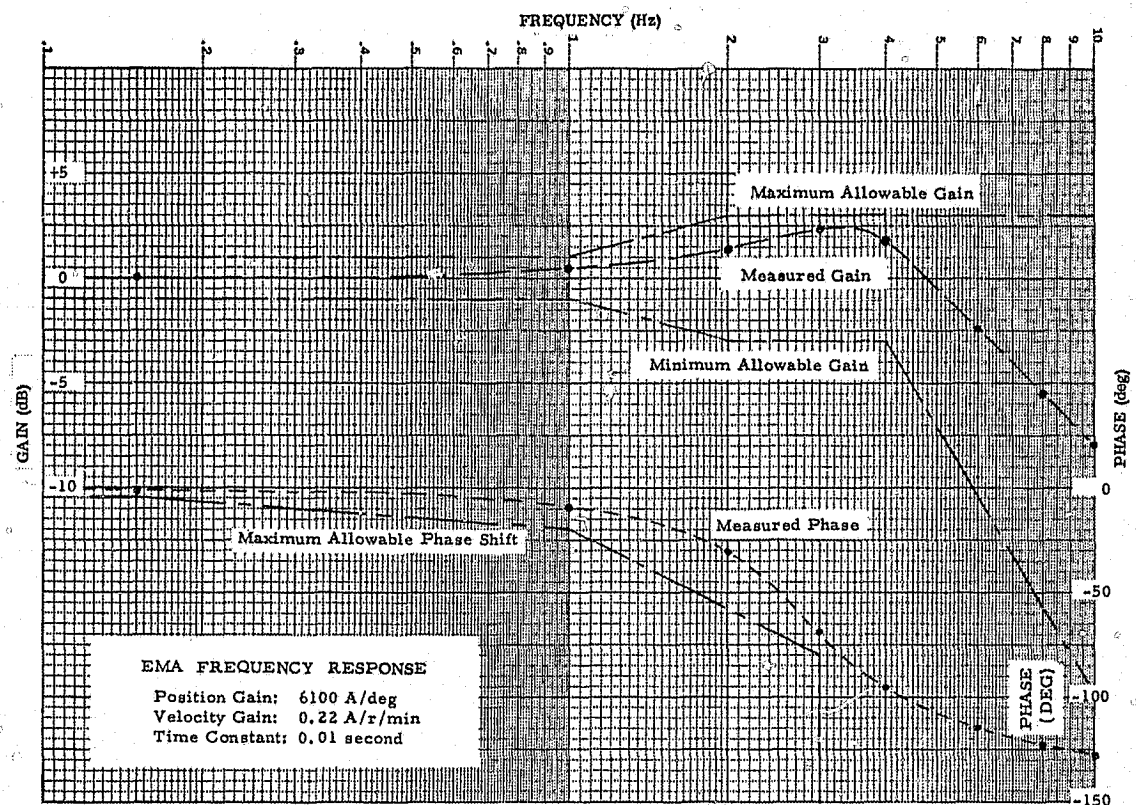


Figure 7-2. Typical Frequency Response Measurements

the position gain was set at 6,100 A/degree of position error, and the velocity gain was 0.22 A/r/min (with speed referenced to the motor shaft). The time constant for the position error break was set at 0.01 second (which would provide a first order lag at 15.9 Hz), and the current command rate limiter was adjusted to provide the slowest available current command rate. For frequencies below 4.0 Hz, the gain and phase measurements were made using the position command

input and the measured output response. At frequencies above 4.0 Hz, the tachometer output signal was used to measure the system output, because the position output motion is restricted to very small amplitudes if the velocity and torque limits of the EMA are to be avoided. The frequency response shown in Figure 7-2 is well within the design goal boundaries (which are also shown on the figure). By adjusting the system parameters, the frequency response characteristics of the EMA can be adjusted over rather wide limits. Tables 7-7 (a) through (f) show typical frequency response data obtained during system tests. As can be seen from these runs, the gain and phase characteristics of the system can be adjusted over a considerable range, and can be made to remain well within the design goal limits.

As a matter of interest, frequency response measurements were also taken with the position loop open in order to determine the gain and phase characteristics of the tachometer loop. The dominant characteristic of the tachometer loop is a well-damped, second-order response (for normal gain adjustments) with a damped natural frequency of approximately 65 Hz. The tachometer loop is very stable, and either the output of the mechanical tachometer or the signal from the rotor position sensor (RPS) may be used for velocity feedback purposes. The use of the RPS velocity signal results in a small-amplitude (less than ± 5 degree) limit-cycle motion at the motor shaft (this would correspond to about ± 0.0014 degree of output motion with an ideal gear train having a 3600:1 ratio). In most applications, system backlash and other nonlinearities would undoubtedly mask this limit cycle completely. In systems using redundant actuators, it may be possible to bias the system in such a manner that each motor would operate at a small percentage of its rated speed, with no net output motion, thus providing a continuous rate signal from the RPS even though the EMA output is stationary. If this is done, the limit cycle should be eliminated.

System Gains and Time Constants:

Position Gain: 6100 A/deg
 Velocity Gain: 0.22 A/r/min
 Time Constant: 0.01 second
 Current Command Rate Limit: Slowest

Frequency (Hz)	Measured		Design Goal		
	Gain (dB)	Phase (deg)	Gain		Phase Lag Max (deg)
			Max (dB)	Min (dB)	
0.15	0.00	-1.7	+1.0	-1.0	-4.0
1.00	0.48	-9.7	+1.0	-1.0	-20.0
2.00	1.42	-31.0	+3.0	-3.0	-58.0
3.00	2.35	-68.6	+3.0	-3.0	-80.0
4.00	1.93	-95.1	+3.0	-3.0	*

*Phase lag at frequencies greater than 3 Hz may be any value

Table 7-7 (a). Data From Frequency Response Tests

System Gains and Time Constants:

Position Gain: 6100 A/deg
 Velocity Gain: 0.22 A/r/min
 Time Constant: 0.01 second
 Current Command Rate Limit: Fastest

Frequency (Hz)	Measured		Design Goal		
	Gain (dB)	Phase (deg)	Gain		Phase Lag Max (deg)
			Max (dB)	Min (dB)	
0.15	0.05	-1.7	+1.0	-1.0	-4.0
1.00	0.40	-9.2	+1.0	-1.0	-20.0
2.00	1.58	-32.1	+3.0	-3.0	-58.0
3.00	2.37	-68.6	+3.0	-3.0	-80.0
4.00	1.40	-100.6	3.0	-3.0	*

Table 7-7 (b). Data from Frequency Response Tests (continued)

System Gains and Time Constants:

Position Gain: 6100 A/deg
 Velocity Gain: 0.22 A/r/min
 Time Constant: 0.00 second
 Current Command Rate Limits: Fastest

Frequency (Hz)	Measured		Design Goal		
	Gain (dB)	Phase (deg)	Gain		Phase Lag Max (deg)
			Max (dB)	Min (dB)	
0.15	0.07	-1.7	+1.0	-1.0	-4.0
1.00	0.24	-9.2	+1.0	-1.0	-20.0
2.00	1.17	-32.1	+3.0	-3.0	-58.0
3.00	0.67	-73.0	+3.0	-3.0	-80.0
4.00	-3.21	-111.5	+3.0	-3.0	*

* Phase lag at frequencies greater than 3 Hz may be any value

Table 7-7 (c). Data from Frequency Response Tests

System Gains and Time Constants:

Position Gain: 6100 A/deg
 Velocity Gain: 0.11 A/r/min
 Time Constant: 0.00 second
 Current Command Rate Limits: Fastest

Frequency (Hz)	Measured		Design Goal		
	Gain (dB)	Phase (deg)	Gain		Phase Lag Max (deg)
			Max (dB)	Min (dB)	
0.15	0.02	-1.1	+1.0	-1.0	-4.0
1.00	0.16	-4.1	+1.0	-1.0	-20.0
2.00	0.98	-14.9	+3.0	-3.0	-58.0
3.00	1.91	-27.6	+3.0	-3.0	-80.0
4.00	3.2	-37.9	+3.0	-3.0	*

Table 7-7 (d). Data from Frequency Response Tests

System Gains and Time Constants:

Position Gain: 6100 A/deg
 Velocity Gain: 0.17 A/r/min
 Time Constant: 0.00 second
 Current Command Rate Limit: Fastest

Frequency (Hz)	Measured		Design Goal		
	Gain (dB)	Phase (deg)	Gain		Phase Lag Max (deg)
			Max (dB)	Min (dB)	
0.15	0.02	-1.6	+1.0	-1.0	-4.0
1.00	0.24	-7.5	+1.0	-1.0	-20.0
2.00	1.17	-23.8	+3.0	-3.0	-58.0
3.00	1.39	-53.3	+3.0	-3.0	-80.0
4.00	0.93	-72.3	+3.0	-3.0	*

Table 7-7 (e). Data from Frequency Response Tests

System Gains and Time Constants:

Position Gain: 12,000 A/deg
 Velocity Gain: 0.27 A/r/min
 Time Constant: 0.00 second
 Current Command Rate Limit: Fastest

Frequency (Hz)	Measured		Design Goal		
	Gain (dB)	Phase (deg)	Gain		Max (deg)
			Max (dB)	Min (dB)	
0.15	0.05	-1.6	+1.0	-1.0	-4.0
1.00	0.20	-5.7	+1.0	-1.0	-20.0
2.00	1.05	-18.3	+3.0	-3.0	-58.0
3.00	1.50	-40.0	+3.0	-3.0	-80.0
4.00	2.46	-45.1	+3.0	-3.0	*

Table 7-7 (f). Data from Frequency Response Tests

7.3.2 STEP RESPONSE TESTS

The EMA was tested to determine its step response characteristics. The design goals for the EMA step response envelopes are shown in Figure 7-3. The two most

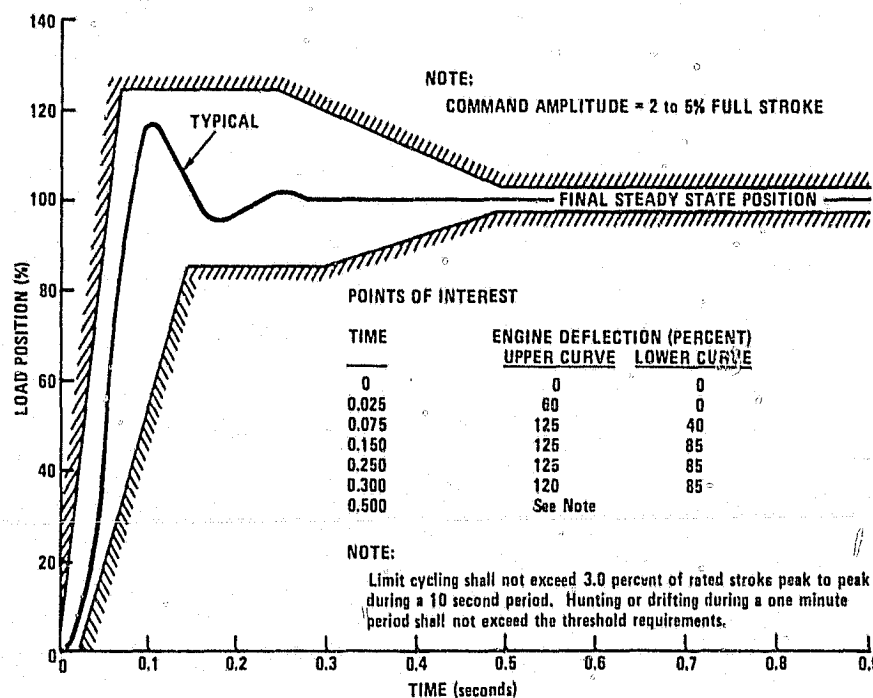


Figure 7-3. Position Transient Response Design Goal

critical parameters are peak overshoot (the design goal is 25%) and time to reach 85% of steady-state travel (0.150 seconds is the design goal). The scaling for the original design was based upon a gear ratio of 2885.5:1, and command amplitudes between 1.1 degrees and 2.75 degrees were to meet the design goal (these values represent 2% and 5% respectively of the 55° full stroke motion, which is $+40^{\circ}$ to -15°). With the 3,600:1 gear ratio of the instrumentation gearbox, the corresponding travel is given by:


<u>Output Travel</u>	<u>Output Motion for 2,685:1 gearbox</u>	<u>Output Motion for 3,600:1 gearbox</u>
2%	1.10 deg	0.8206 deg
3%	1.65	1.231
4%	2.20	1.641
5%	2.75	2.051

The overshoot which is measured in response to a step command is a function of the system gains and adjustment parameters. Figures 7-4 through 7-7 show typical measurements of the EMA's response to 2, 3, 4, and 5% commands. The overshoot requirements can be met very easily. For example, with a position gain (K_p) of 6,100 A/deg, a velocity gain (K_v) of 0.17 A/r/min, a time constant (τ) of 0.00 second, and with the current command rate limiter set for its fastest response (see Figure 7-4), the overshoot in response to a step command was found to be:

<u>Step Command</u>	<u>Measured Overshoot</u>
2%	14%
3%	7%
4%	5%
5%	3%


By appropriate adjustment, the system step response can be varied from rather lightly damped (see Figure 7-7) to highly damped (see Figure 7-6).

The time required for the system to reach 85% of its steady-state output motion is determined primarily by the acceleration and velocity limits of system. In addition, backlash, mechanical windup, and other effects add to the response time (see Paragraph 7.3.6 for additional discussion of these effects). For typical gains, the response times vary from about 90 milliseconds for a 2% step to 170 milliseconds for a 5% step (see Figure 7-8).

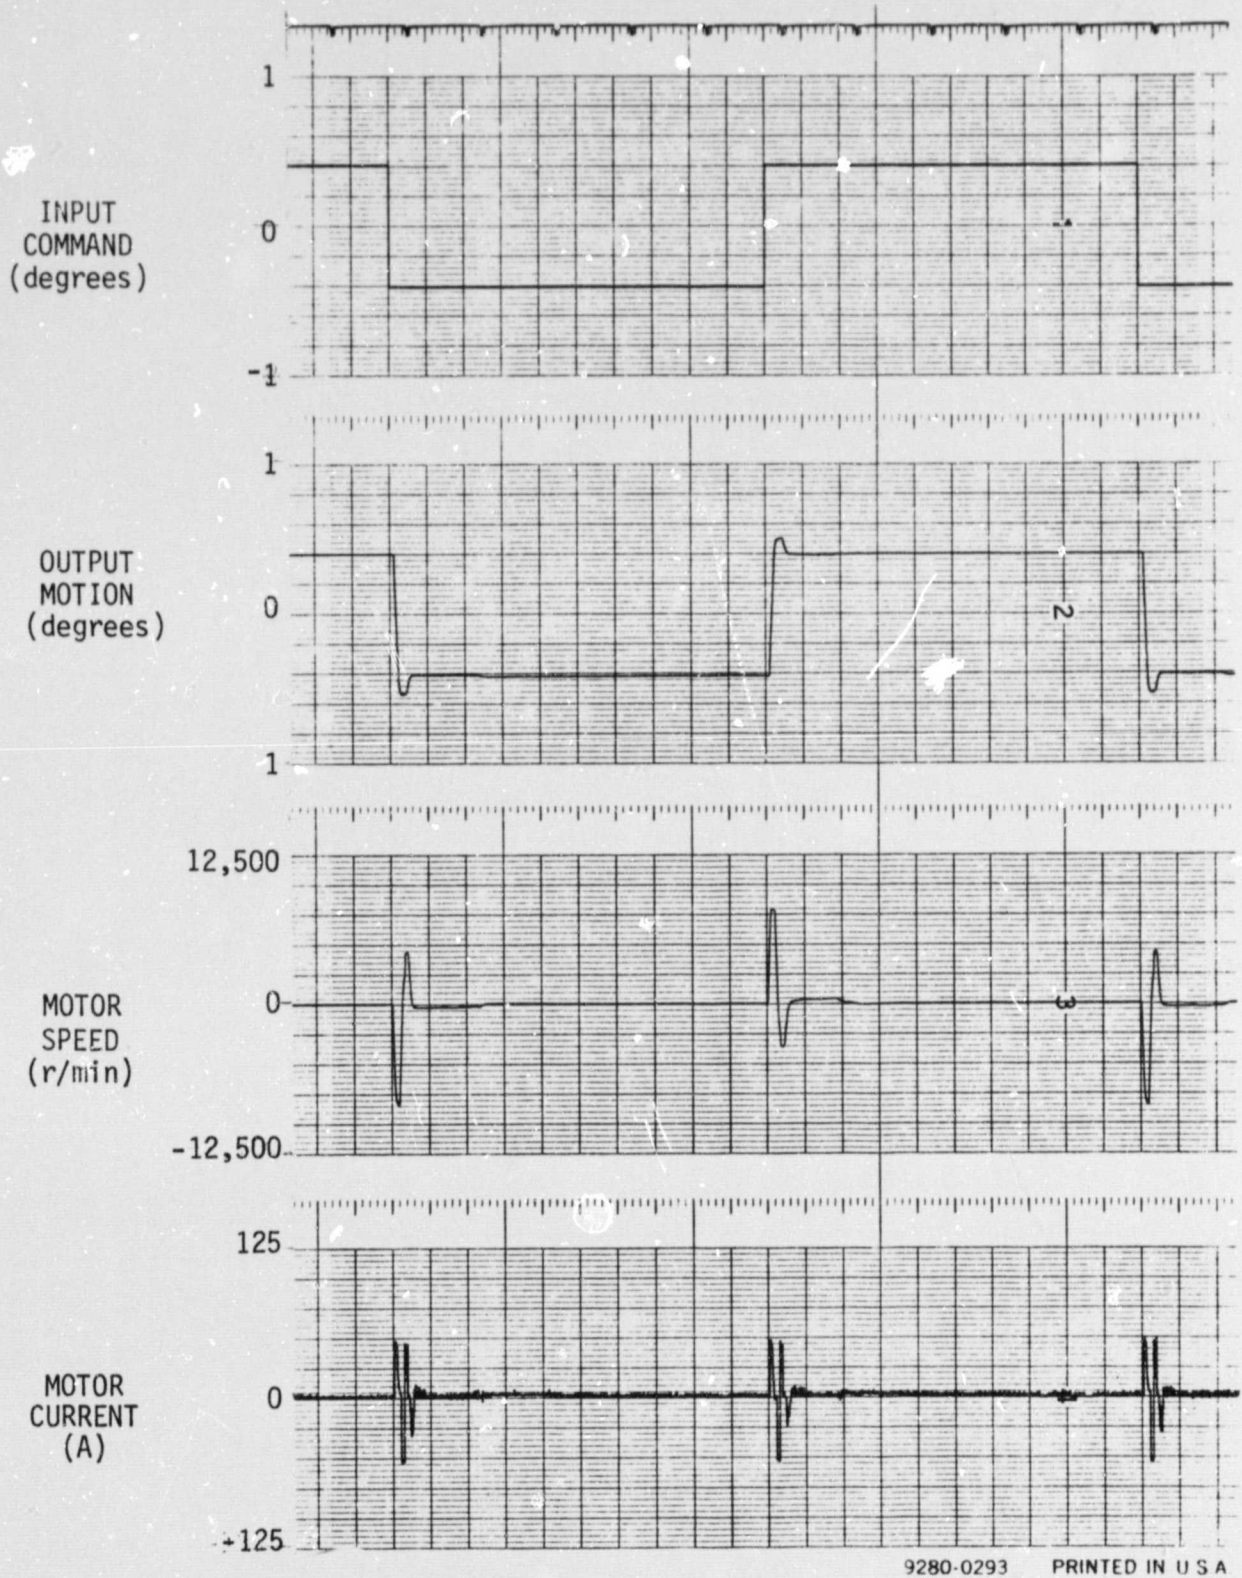


9280-0293 PRINTED IN U S A

Figure 7-4 (a). Step Response to 2% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.17 \text{ A/r/min}, \tau = 0.00 \text{ second})$

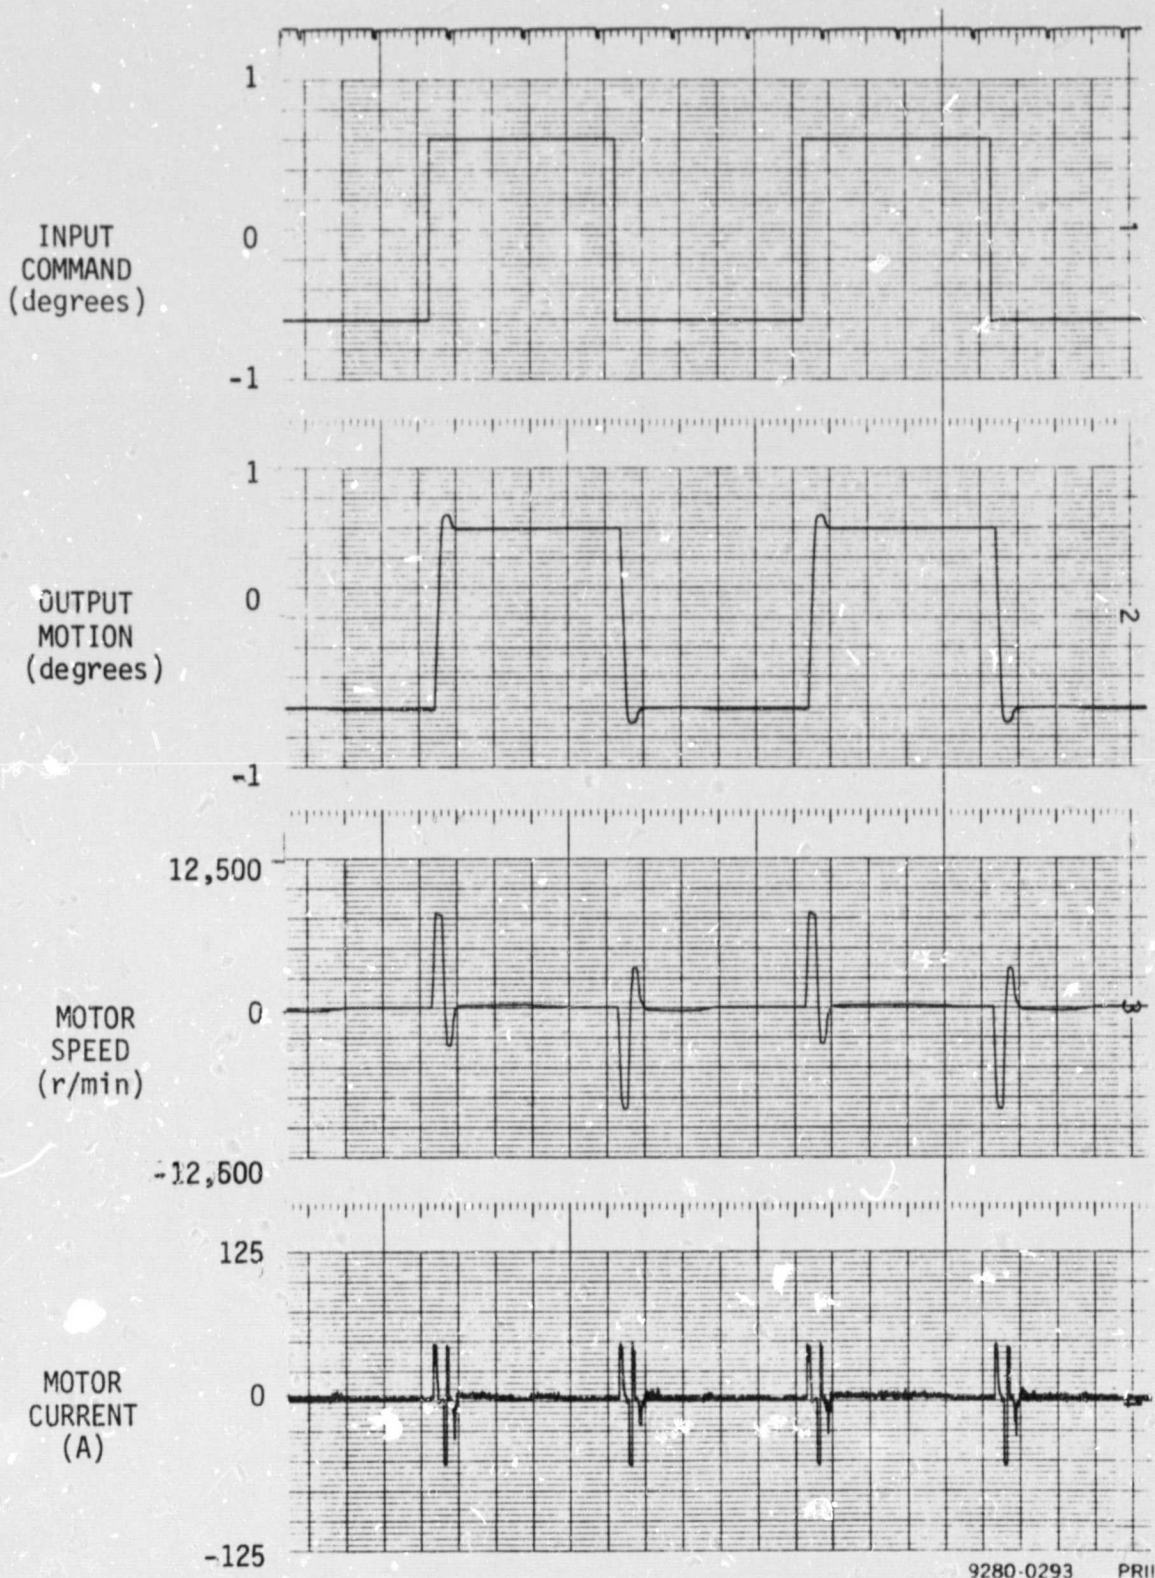

9280-0293 PRII

Figure 7-4 (b). Step Response to 3% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.17 \text{ A/r/min}, \tau = 0.00 \text{ second})$

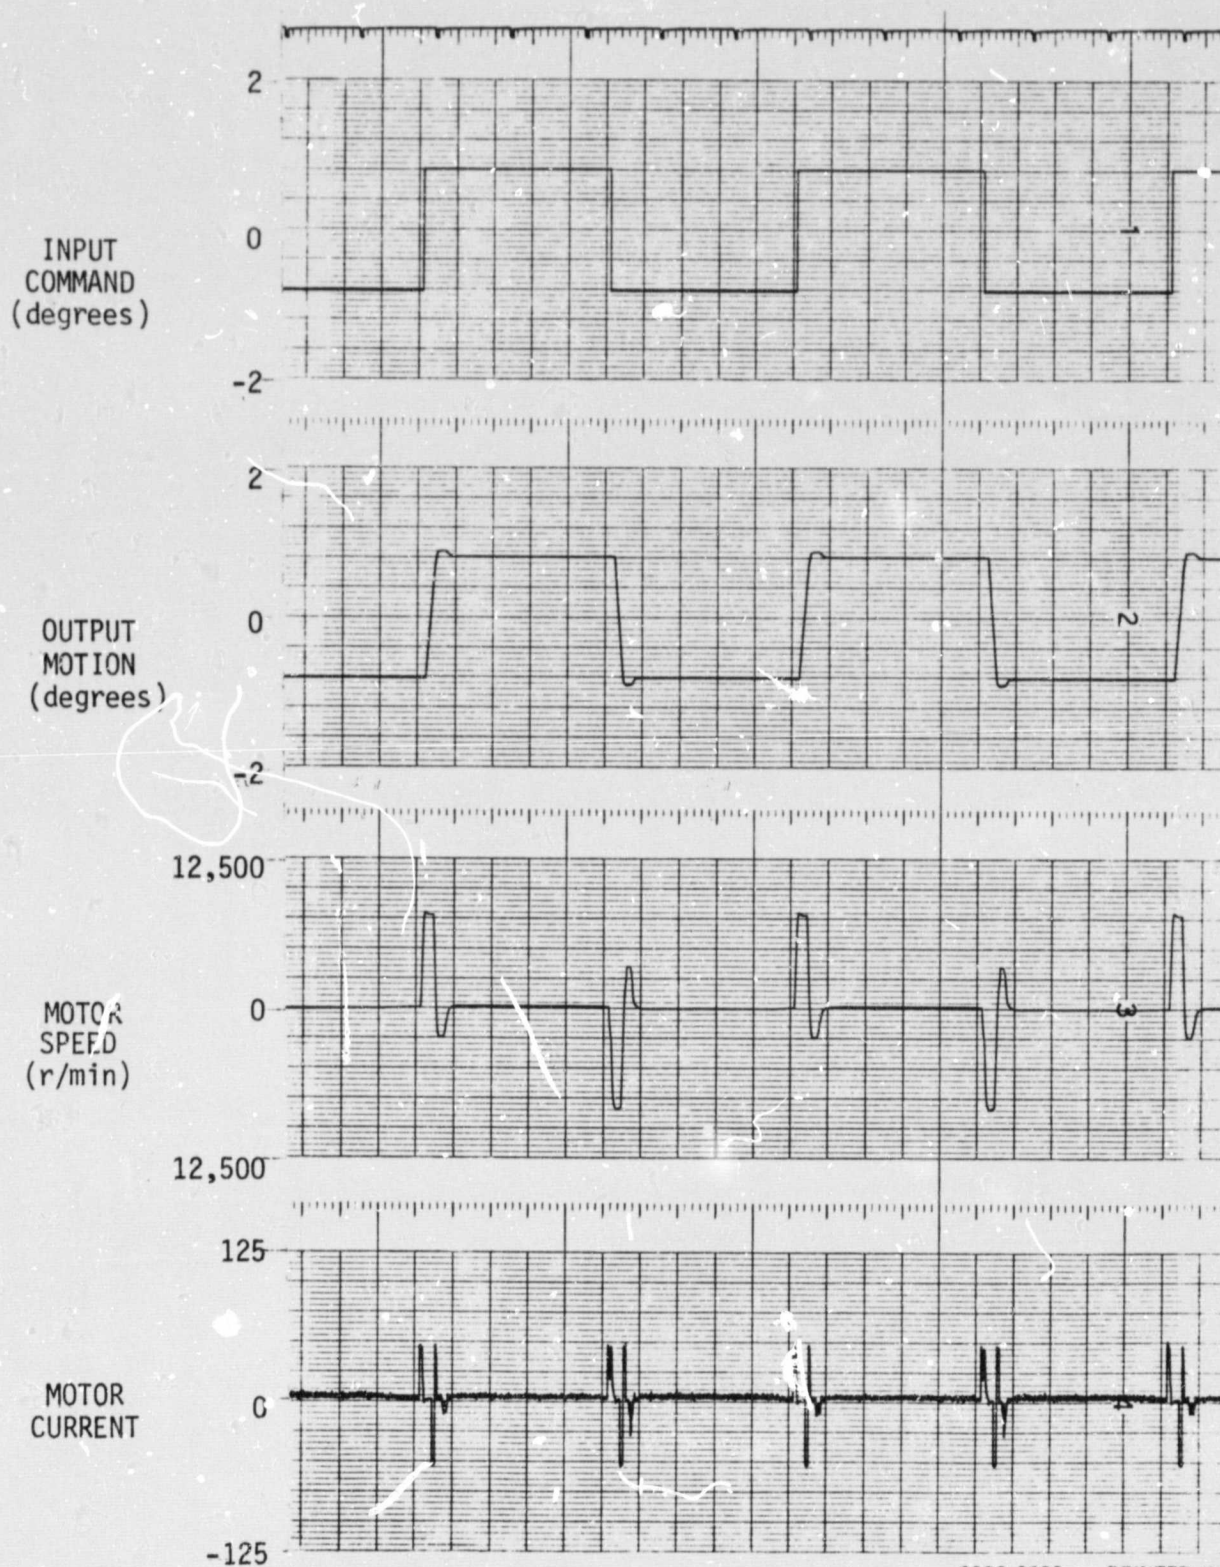

9280-0293 PRINTED IN

Figure 7-4 (c). Step Response to 4% Command
 $(K_p + 6100) \text{ A/deg}, K_v = 0.17 \text{ A/r/min}, \tau = 0.00 \text{ second}$

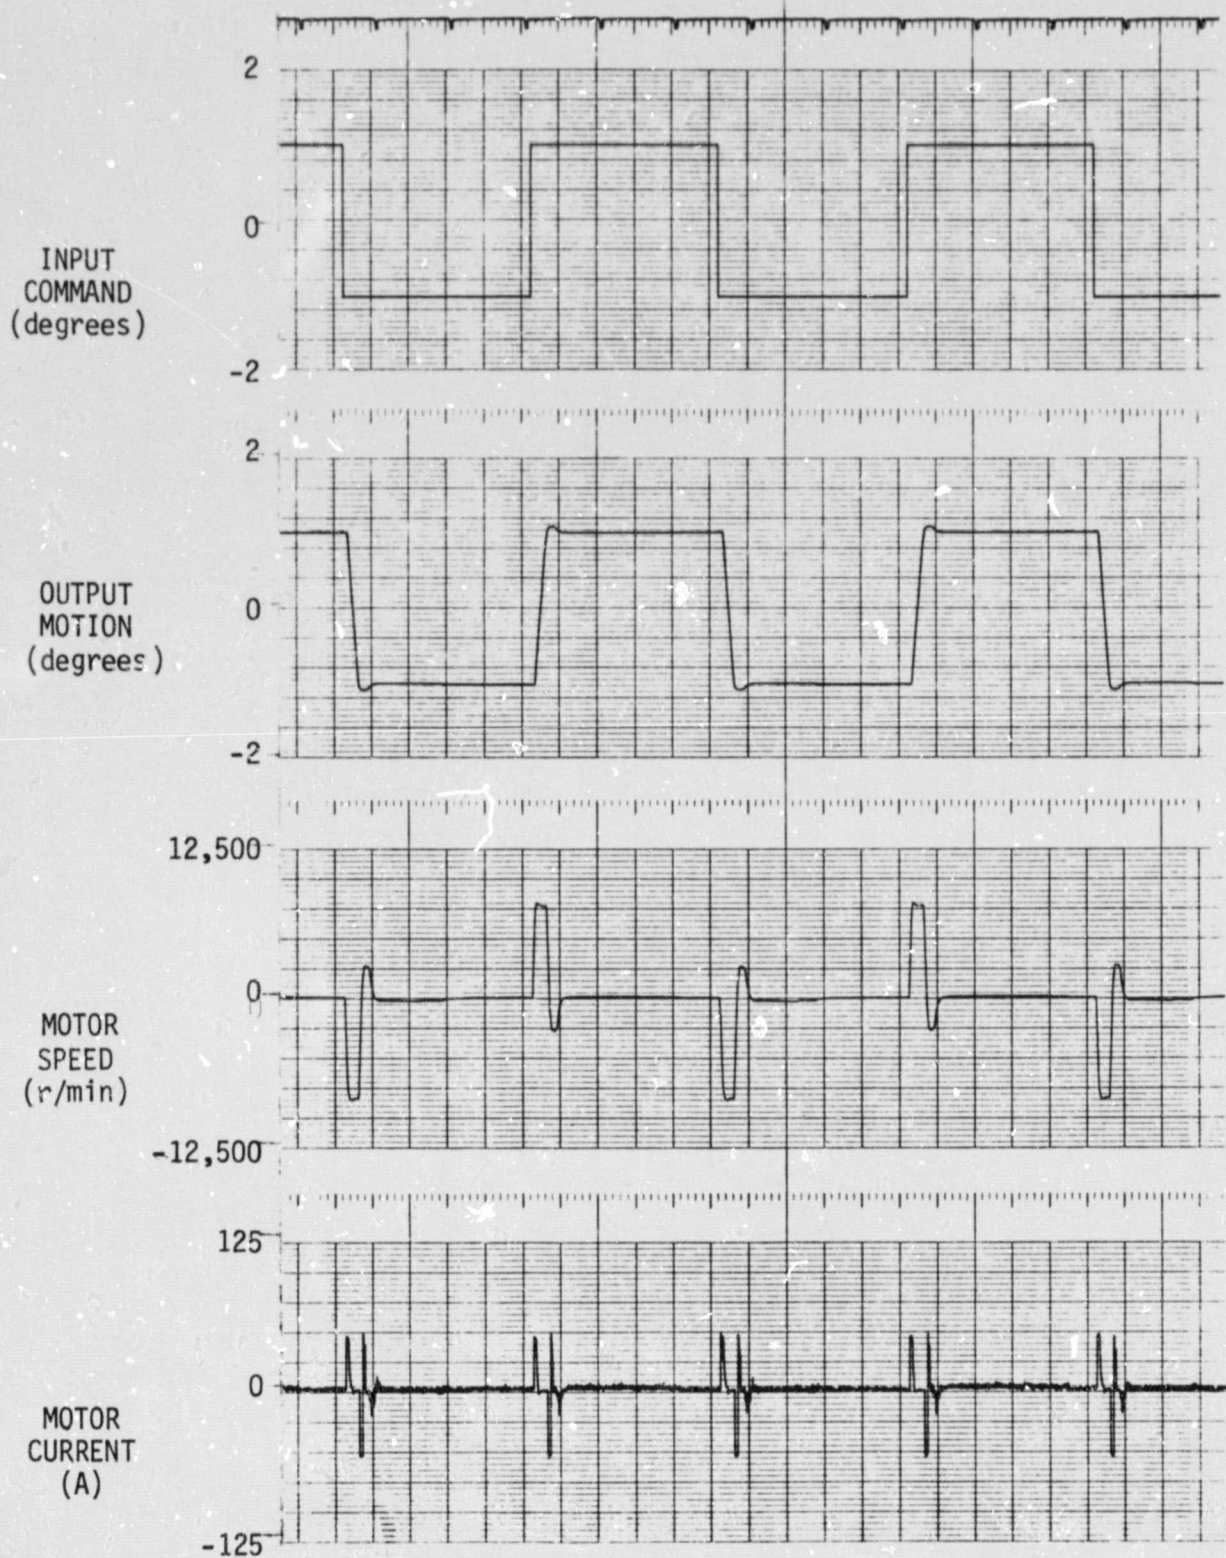


Figure 7-4 (d). Step Response to 5% Command
 $(K_p + 6100) \text{ A/deg}$, $K_v = 0.17 \text{ A/r/min}$, $\tau = 0.00 \text{ second}$

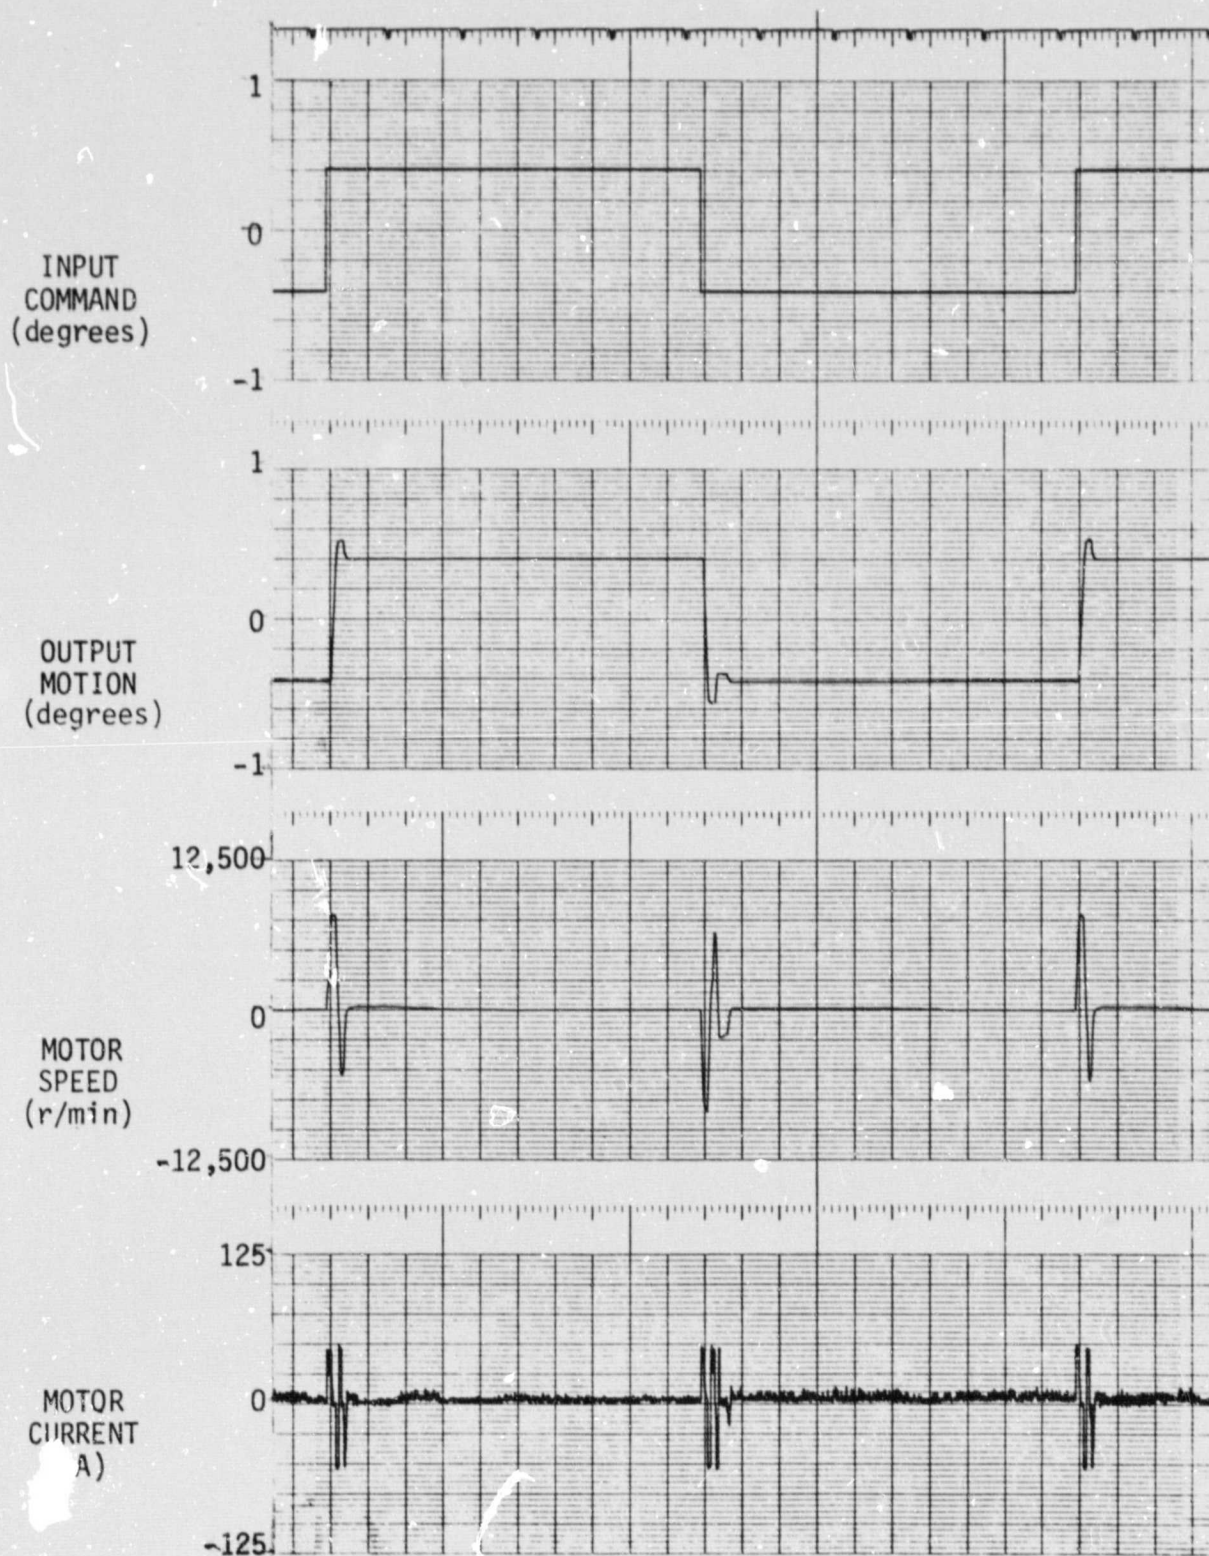


Figure 7-5 (a). Step Response to 2% Command
 $(K_p = 12,000 \text{ A/deg}, K_v = 0.27 \text{ A/r/min}, \tau = 0.00 \text{ second})$

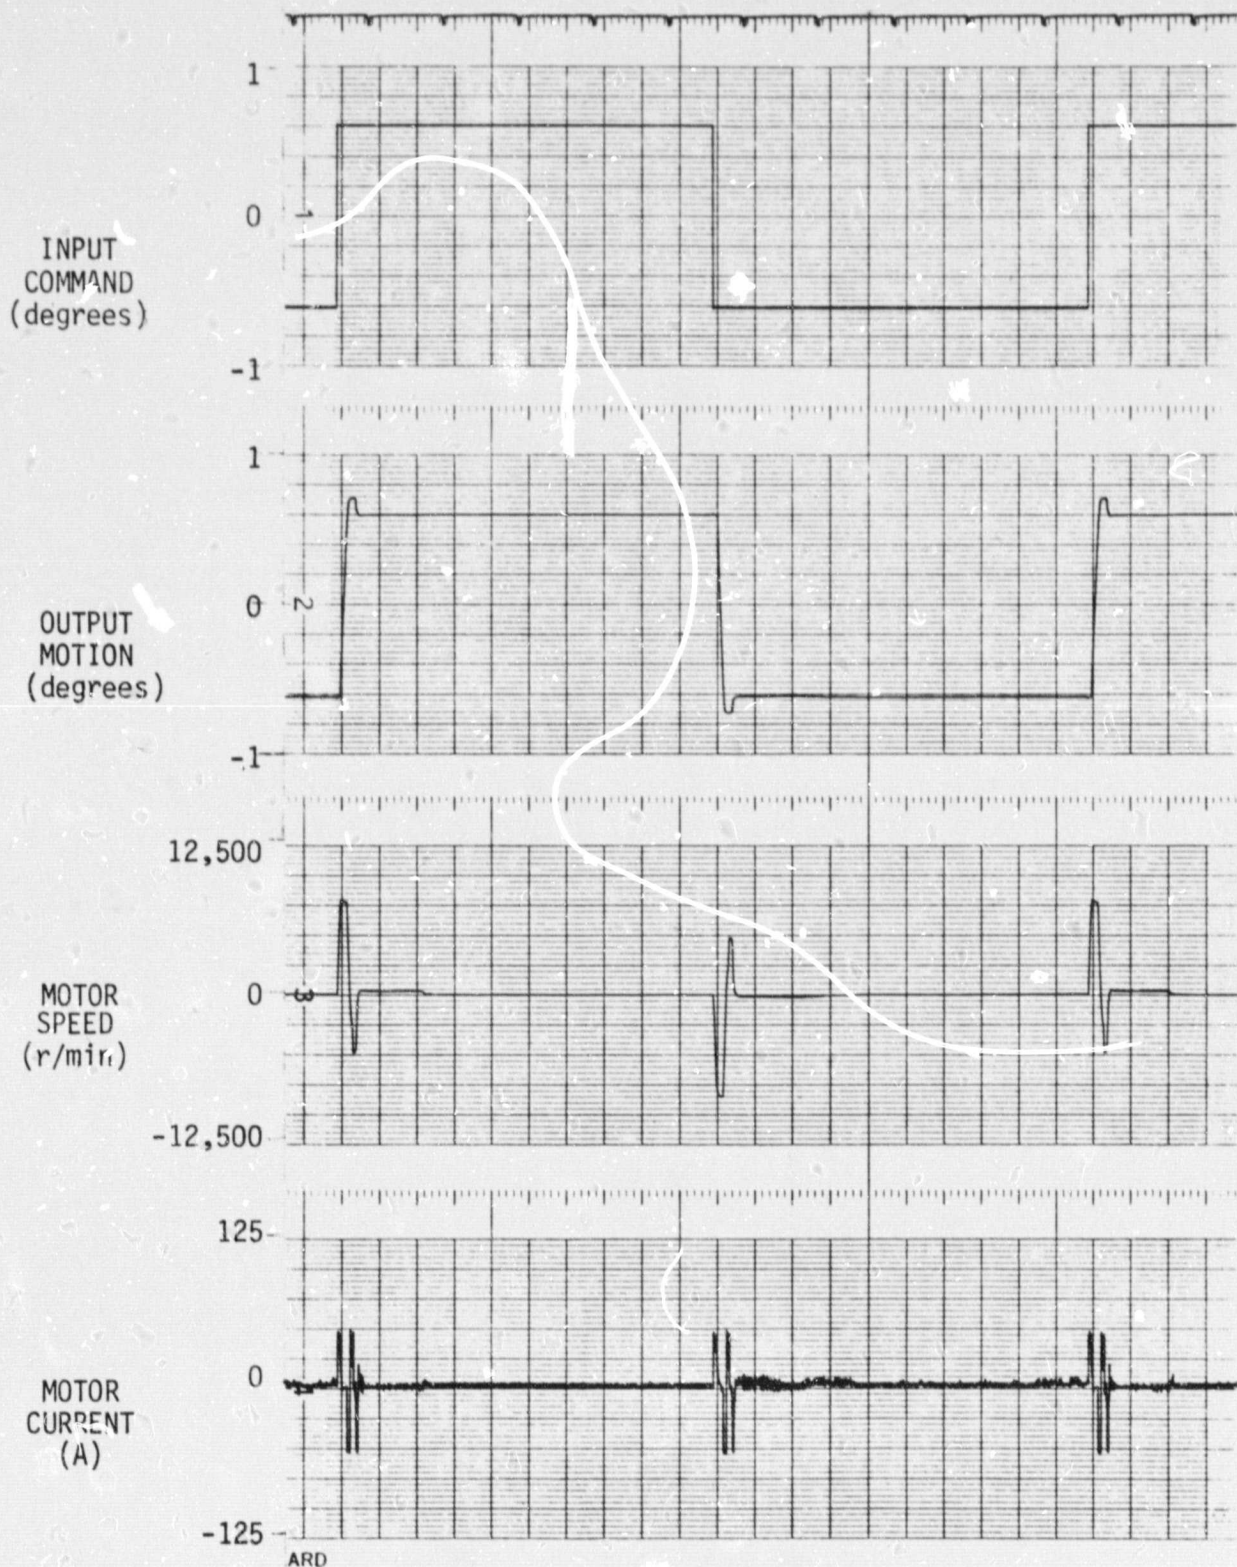


Figure 7-5 (b). Step Response to 3% Command
 $(K_p = 12,000 \text{ A/deg}, K_v = 0.27 \text{ A/r/min}, \tau = 0.00 \text{ second})$

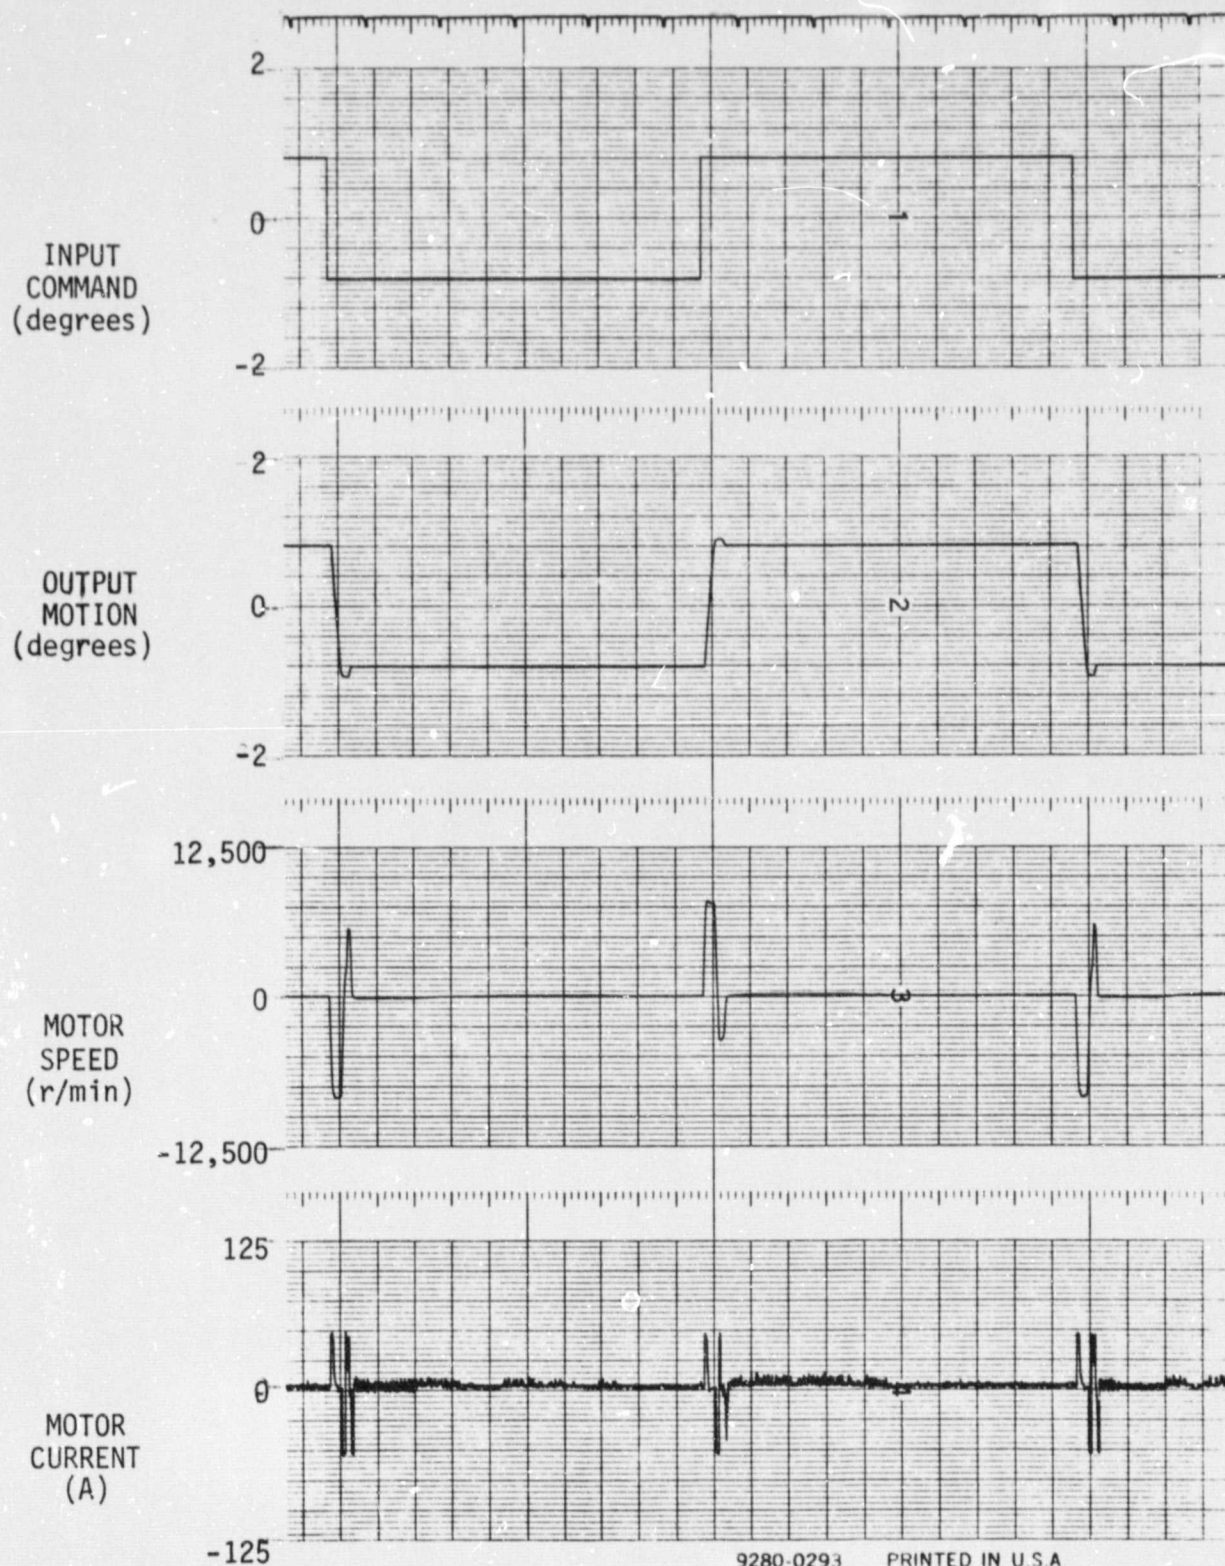


Figure 7-5 (c). Step Response to 4% Command
 $(K_p = 12,000 \text{ A/deg}, K_v = 0.27 \text{ A/r/min}, \tau = 0.00 \text{ second})$

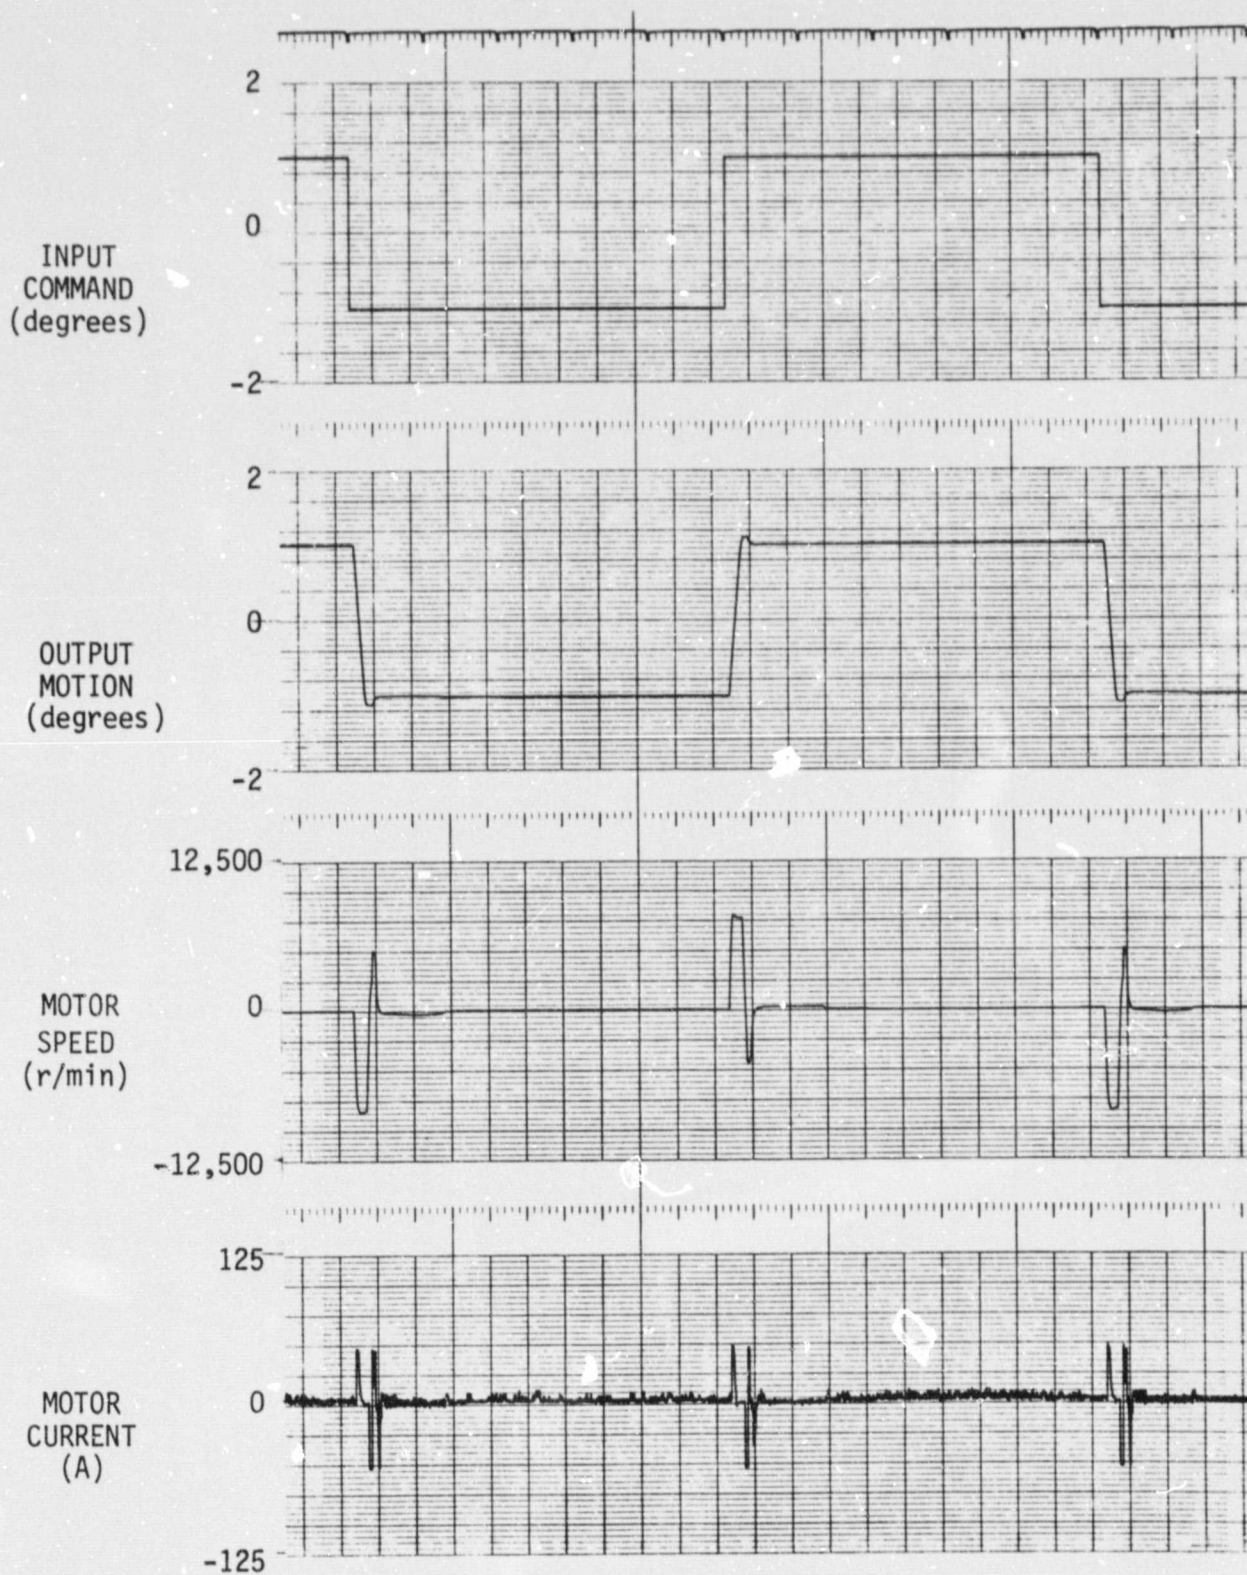


Figure 7-5 (d). Step Response to 9% Command
 $(K_p = 12,500 \text{ A/deg}, K_v = 0.27 \text{ A/r/min}, \tau = 0.00 \text{ second})$

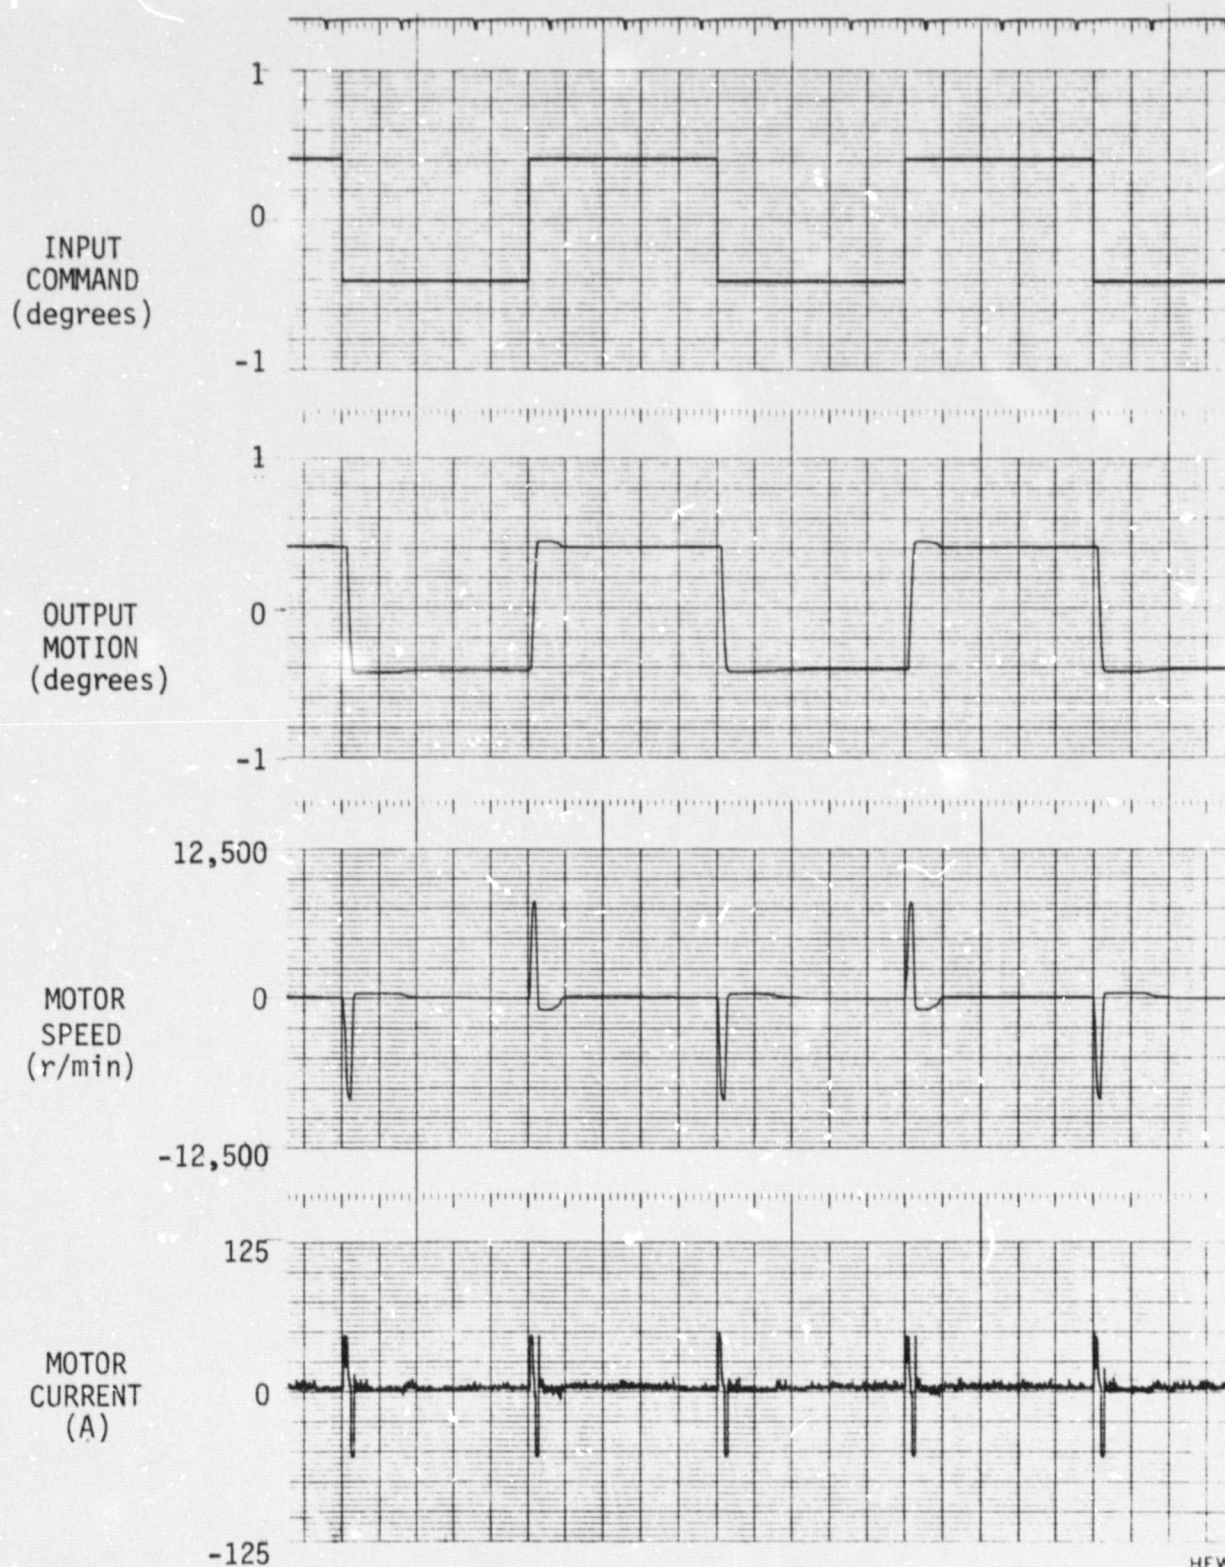


Figure 7-6 (a). Step Response to 2% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.22 \text{ A/r/min}, \tau = 0.00 \text{ second})$

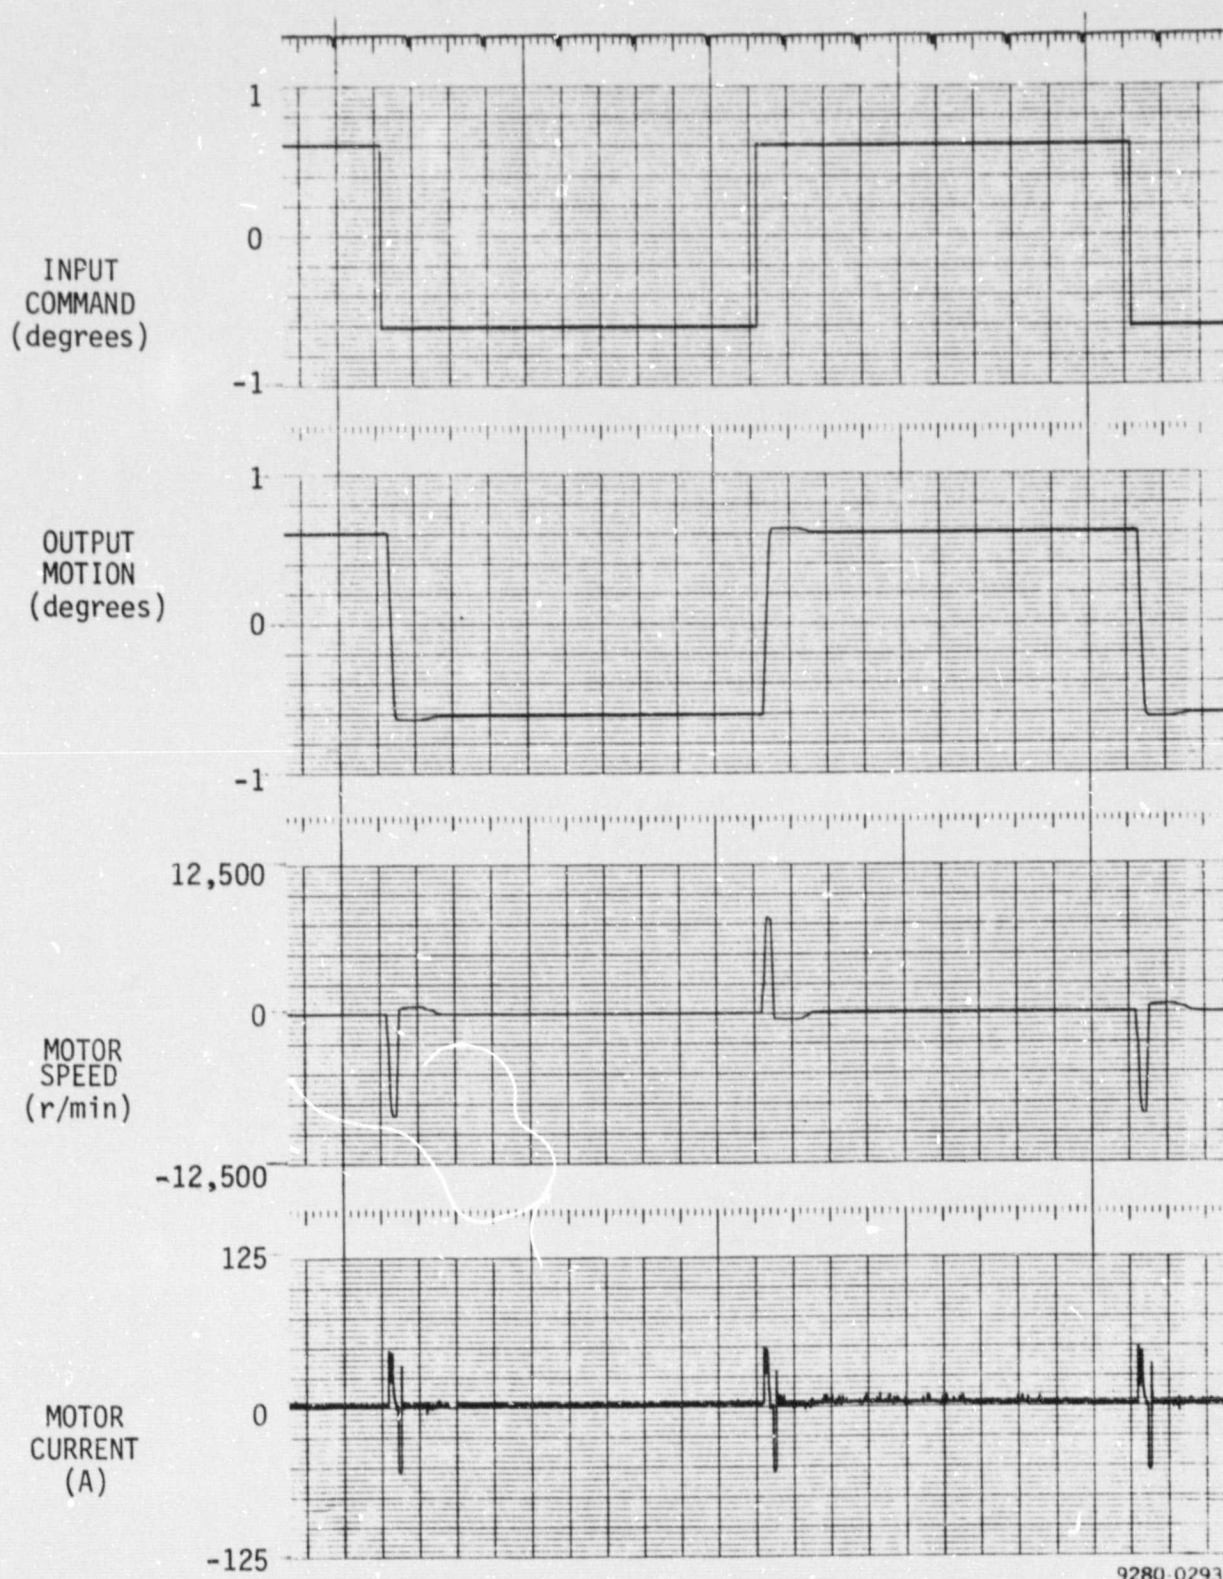


Figure 7-6 (b). Step Response to 3% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.22 \text{ A/r/min}, \tau = 0.00 \text{ second})$

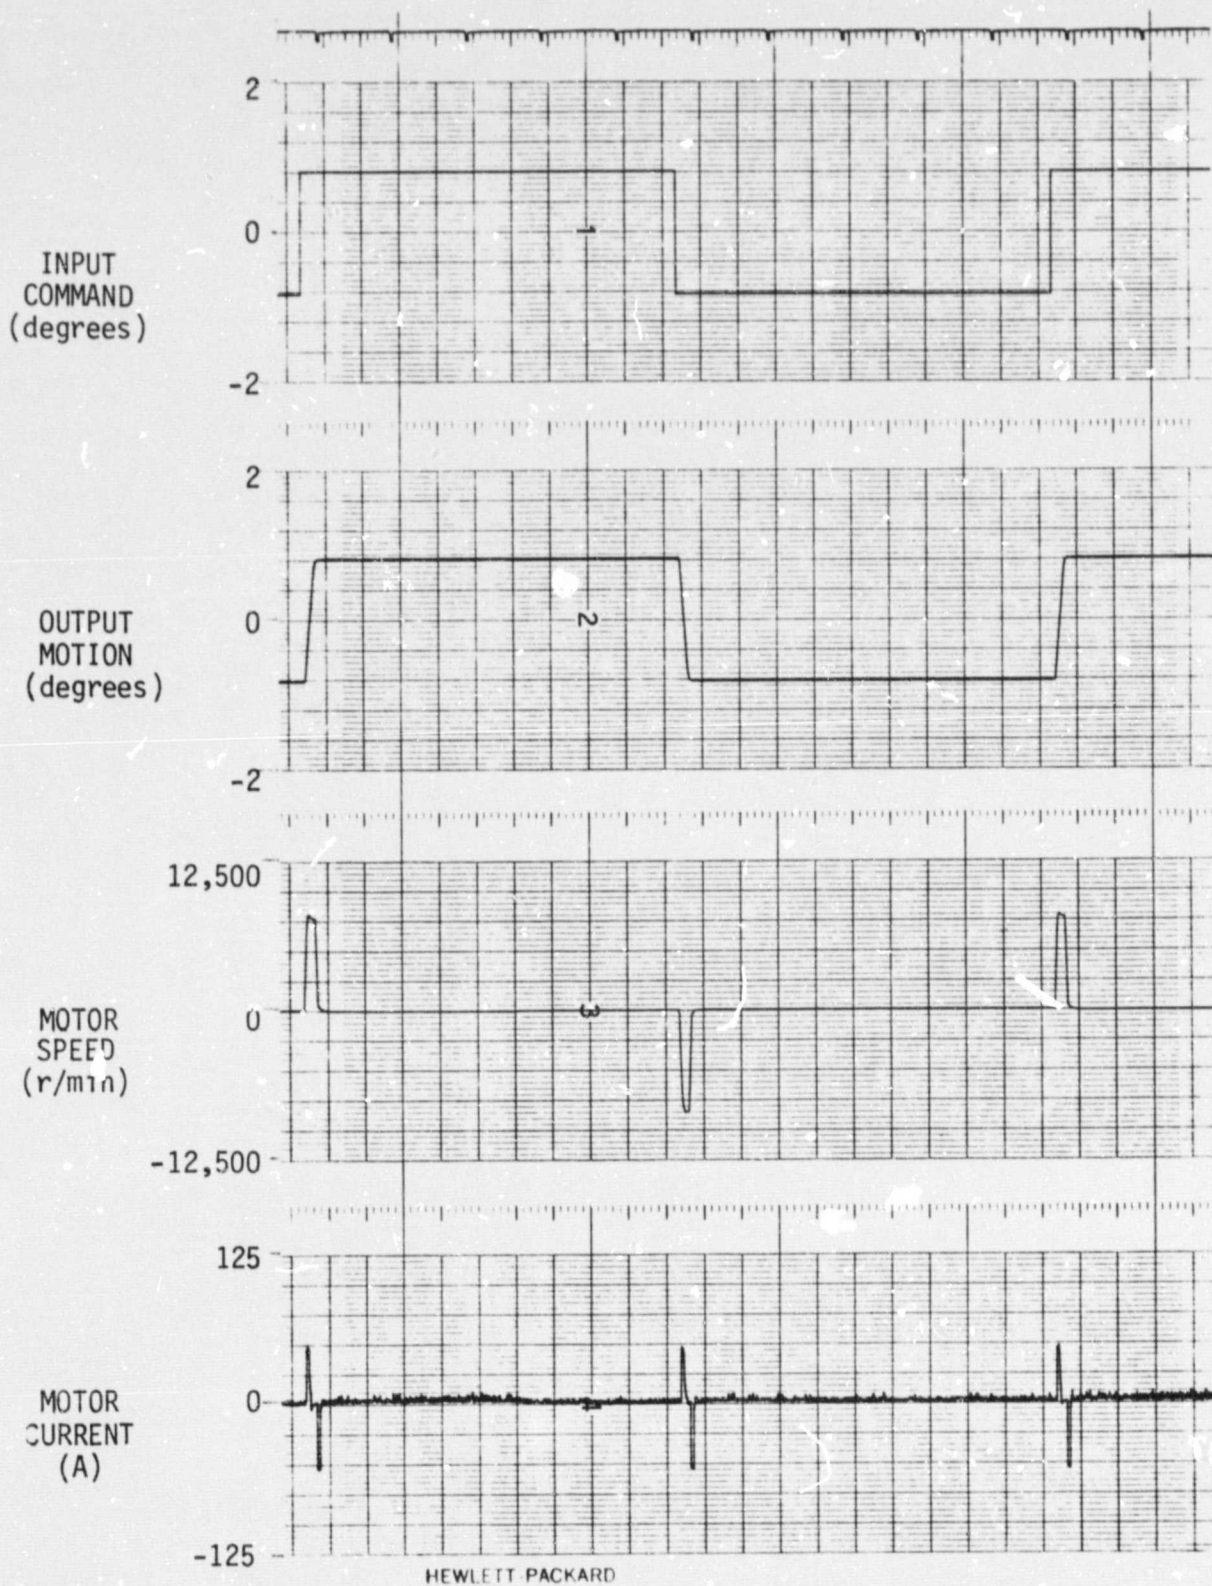


Figure 7-6 (c). Step Response to 4% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.22 \text{ A/r/min}, \tau = 0.00 \text{ second})$

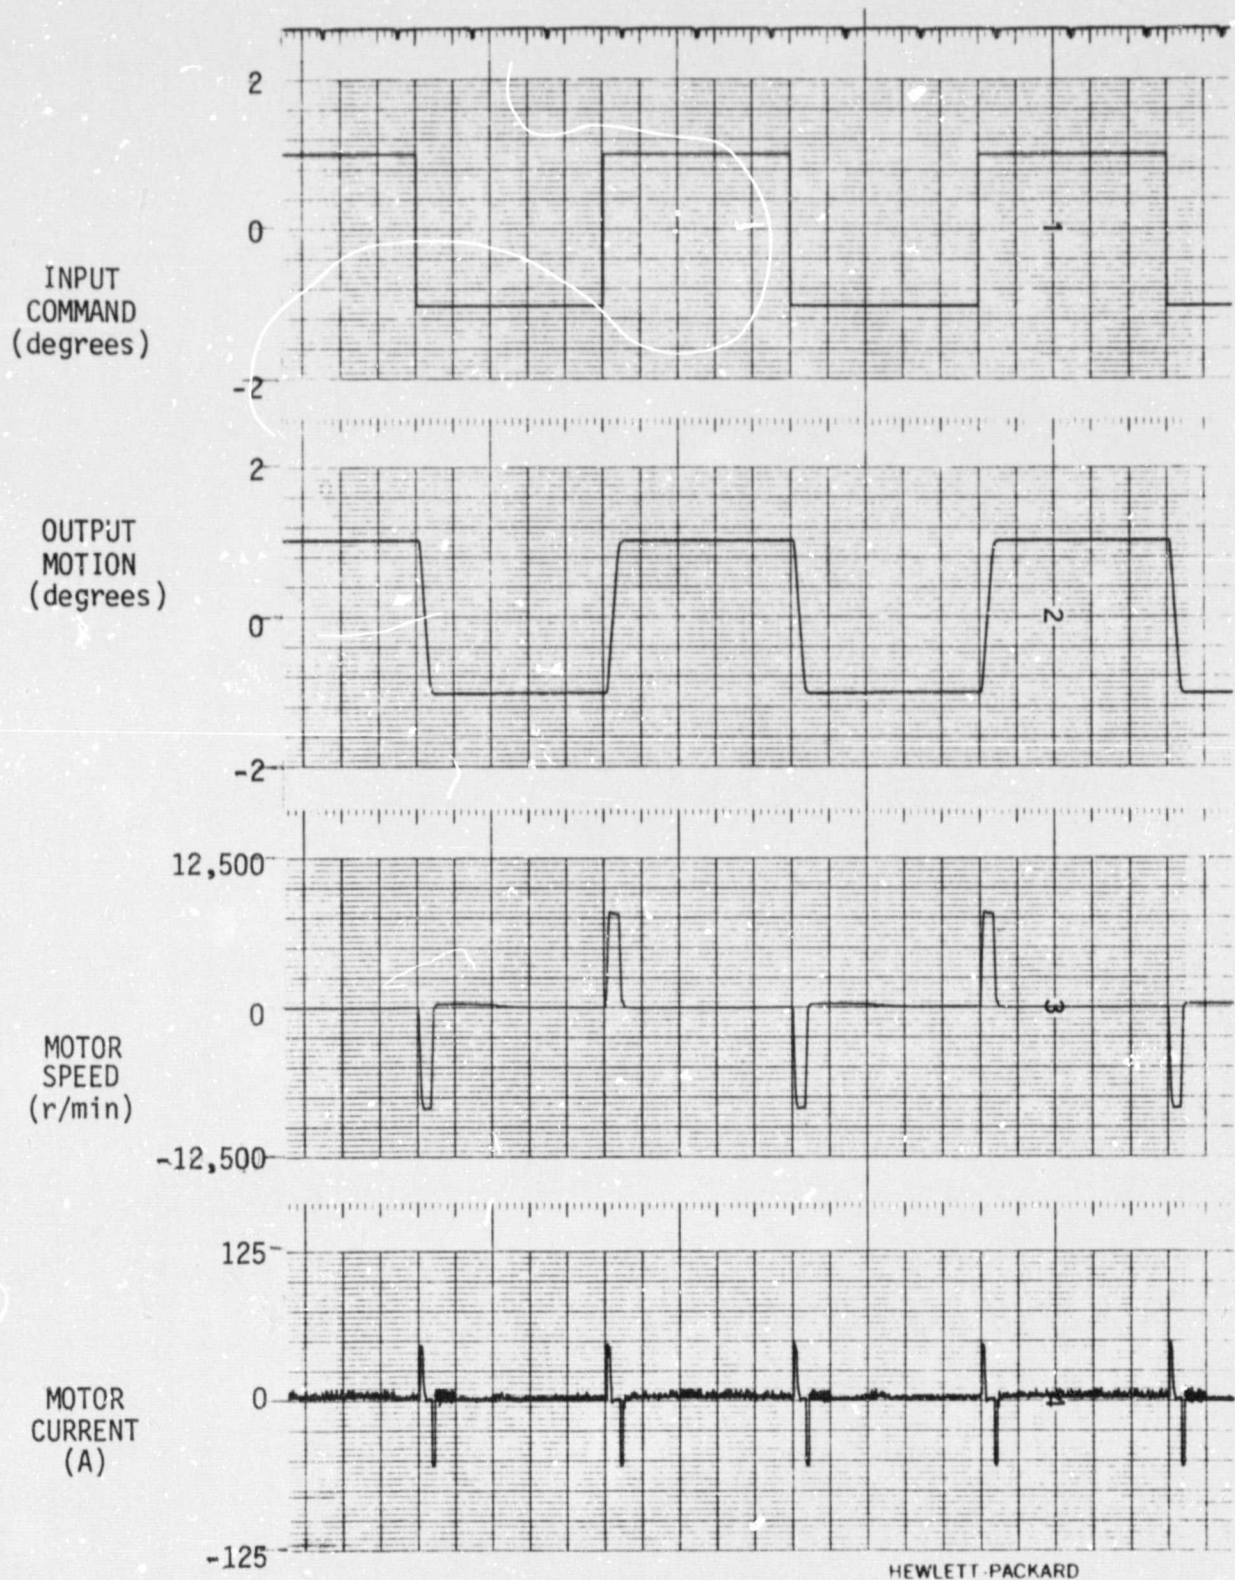


Figure 7-6 (d). Step Response to 5% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.22 \text{ A/r/min}, \tau = 0.00 \text{ second})$

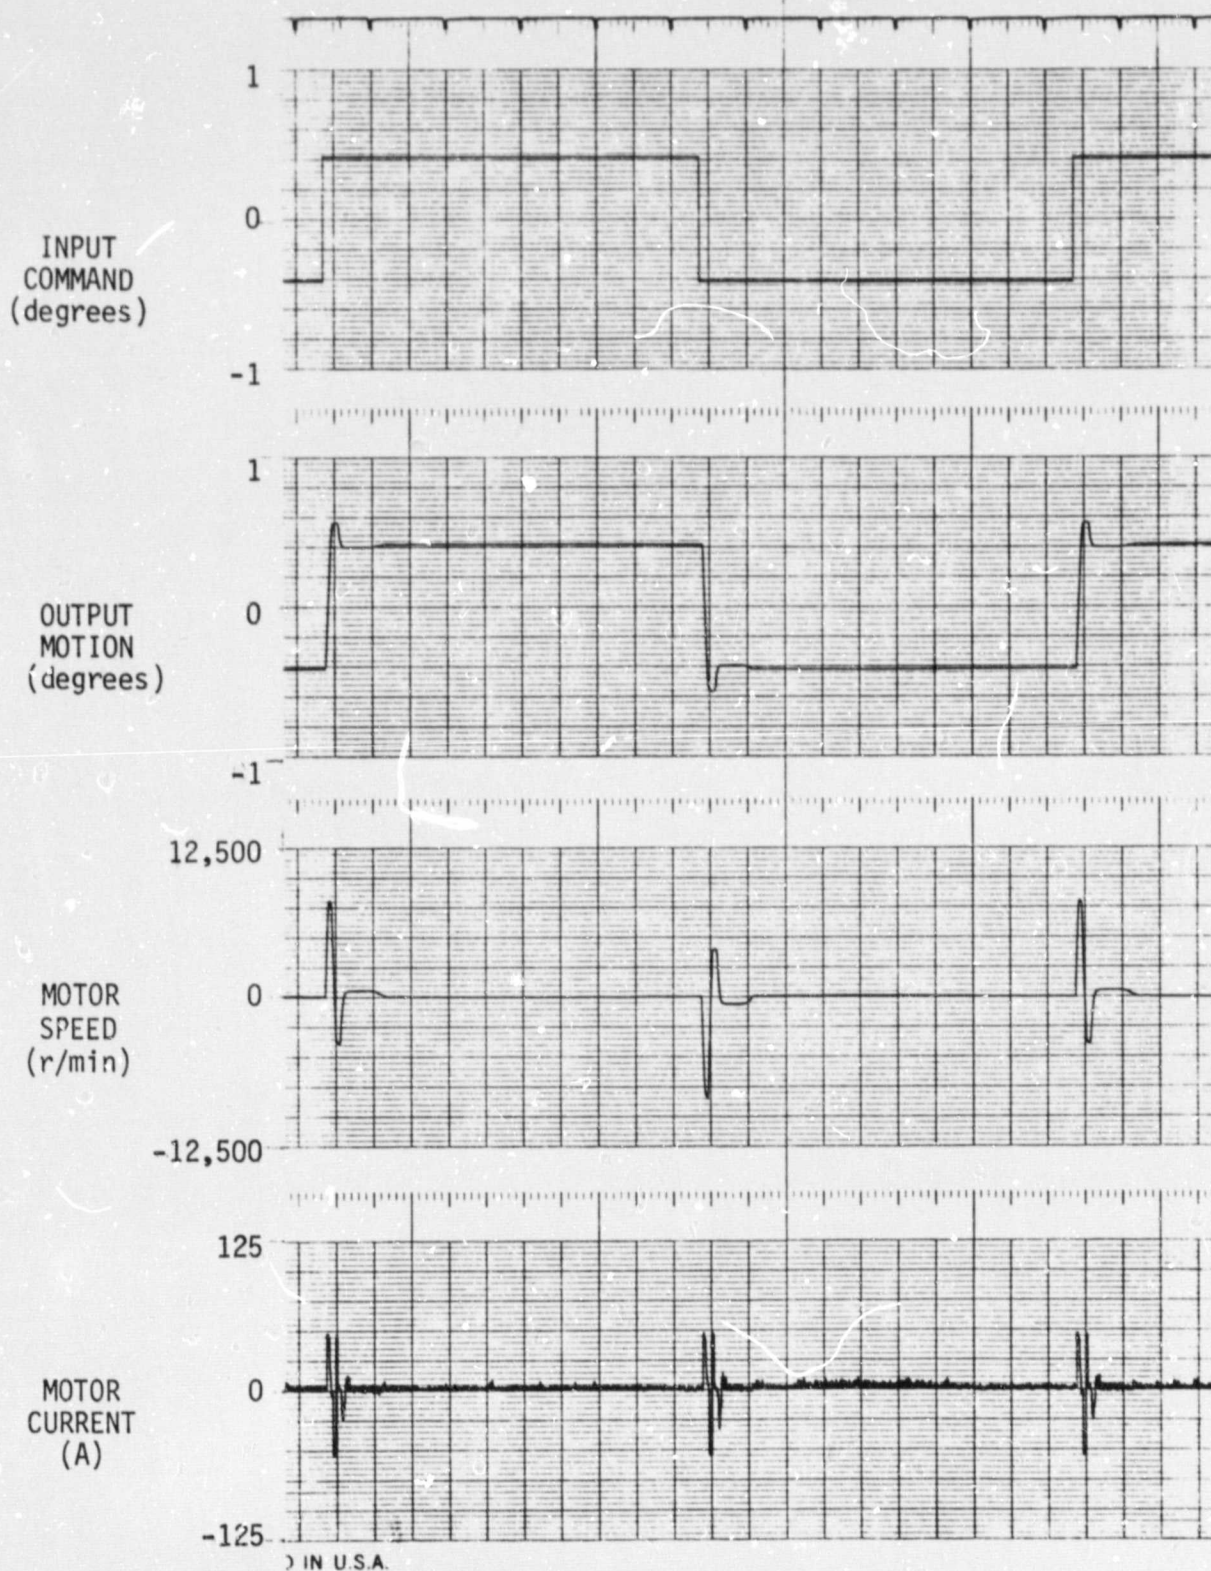


Figure 7-7 (a). Step Response to 2% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.22 \text{ A/r/min}, \tau = 0.00 \text{ second})$

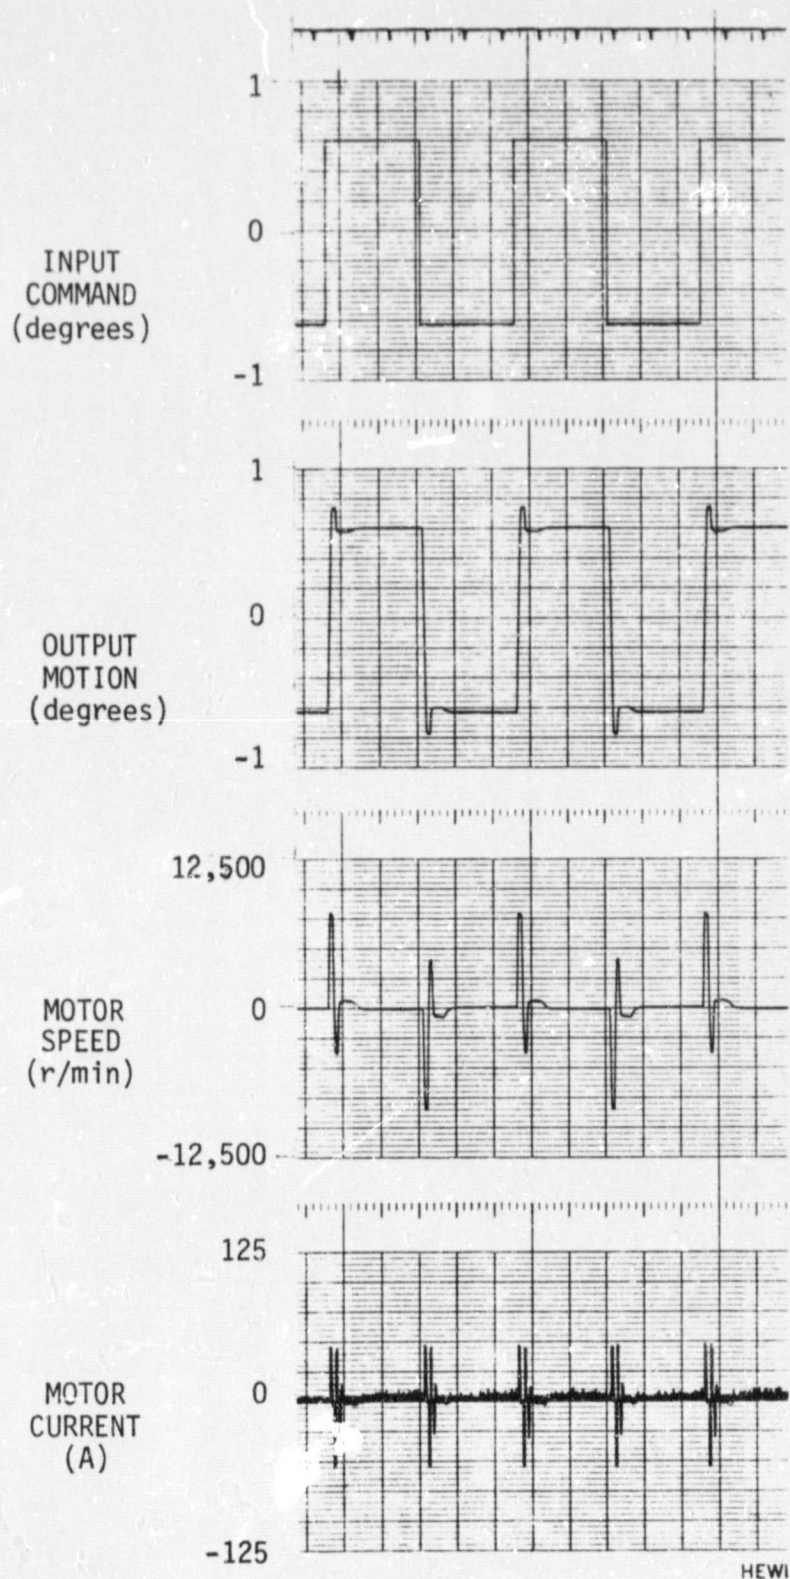


Figure 7-7 (b). Step Response to 3% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.22 \text{ A/r/min}, \tau = 0.00 \text{ second})$

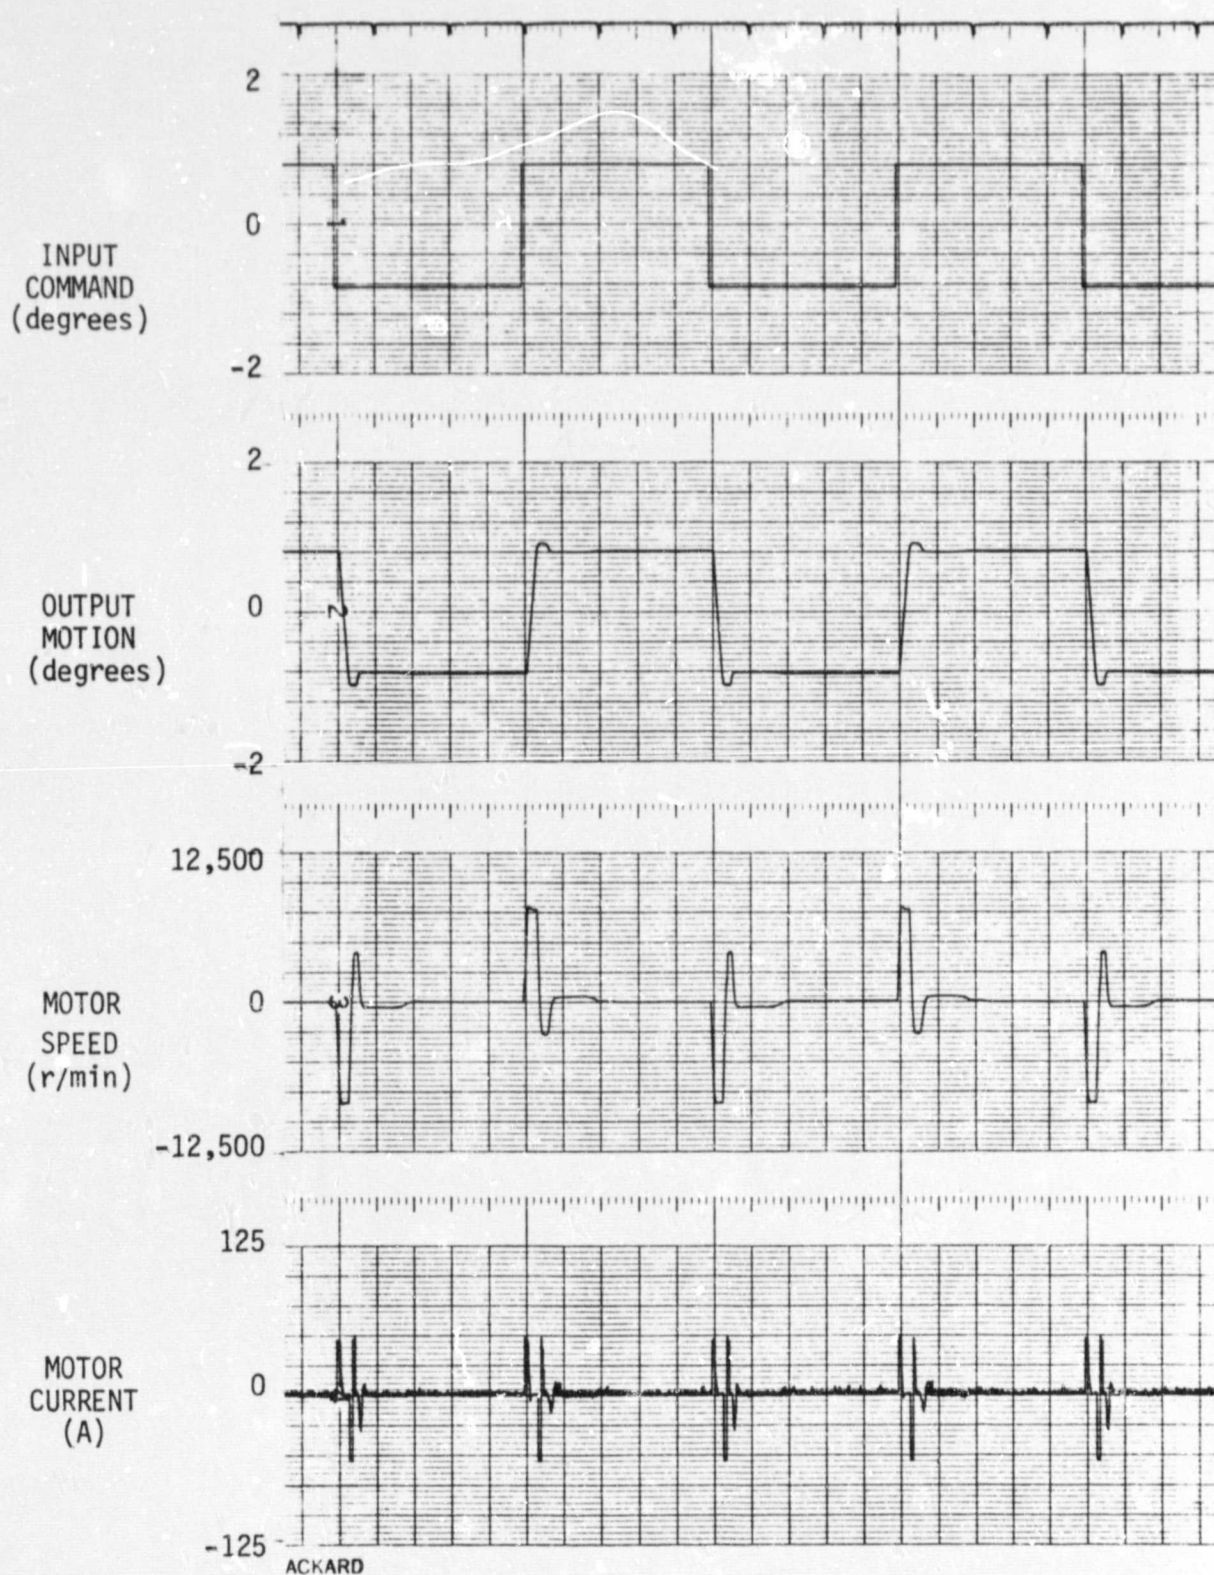


Figure 7-7 (c). Step Response to 4% Command
 $(K_p = 6,100 \text{ A/deg. } K_v = 0.22 \text{ A/r/min, } \tau = 0.00 \text{ second})$

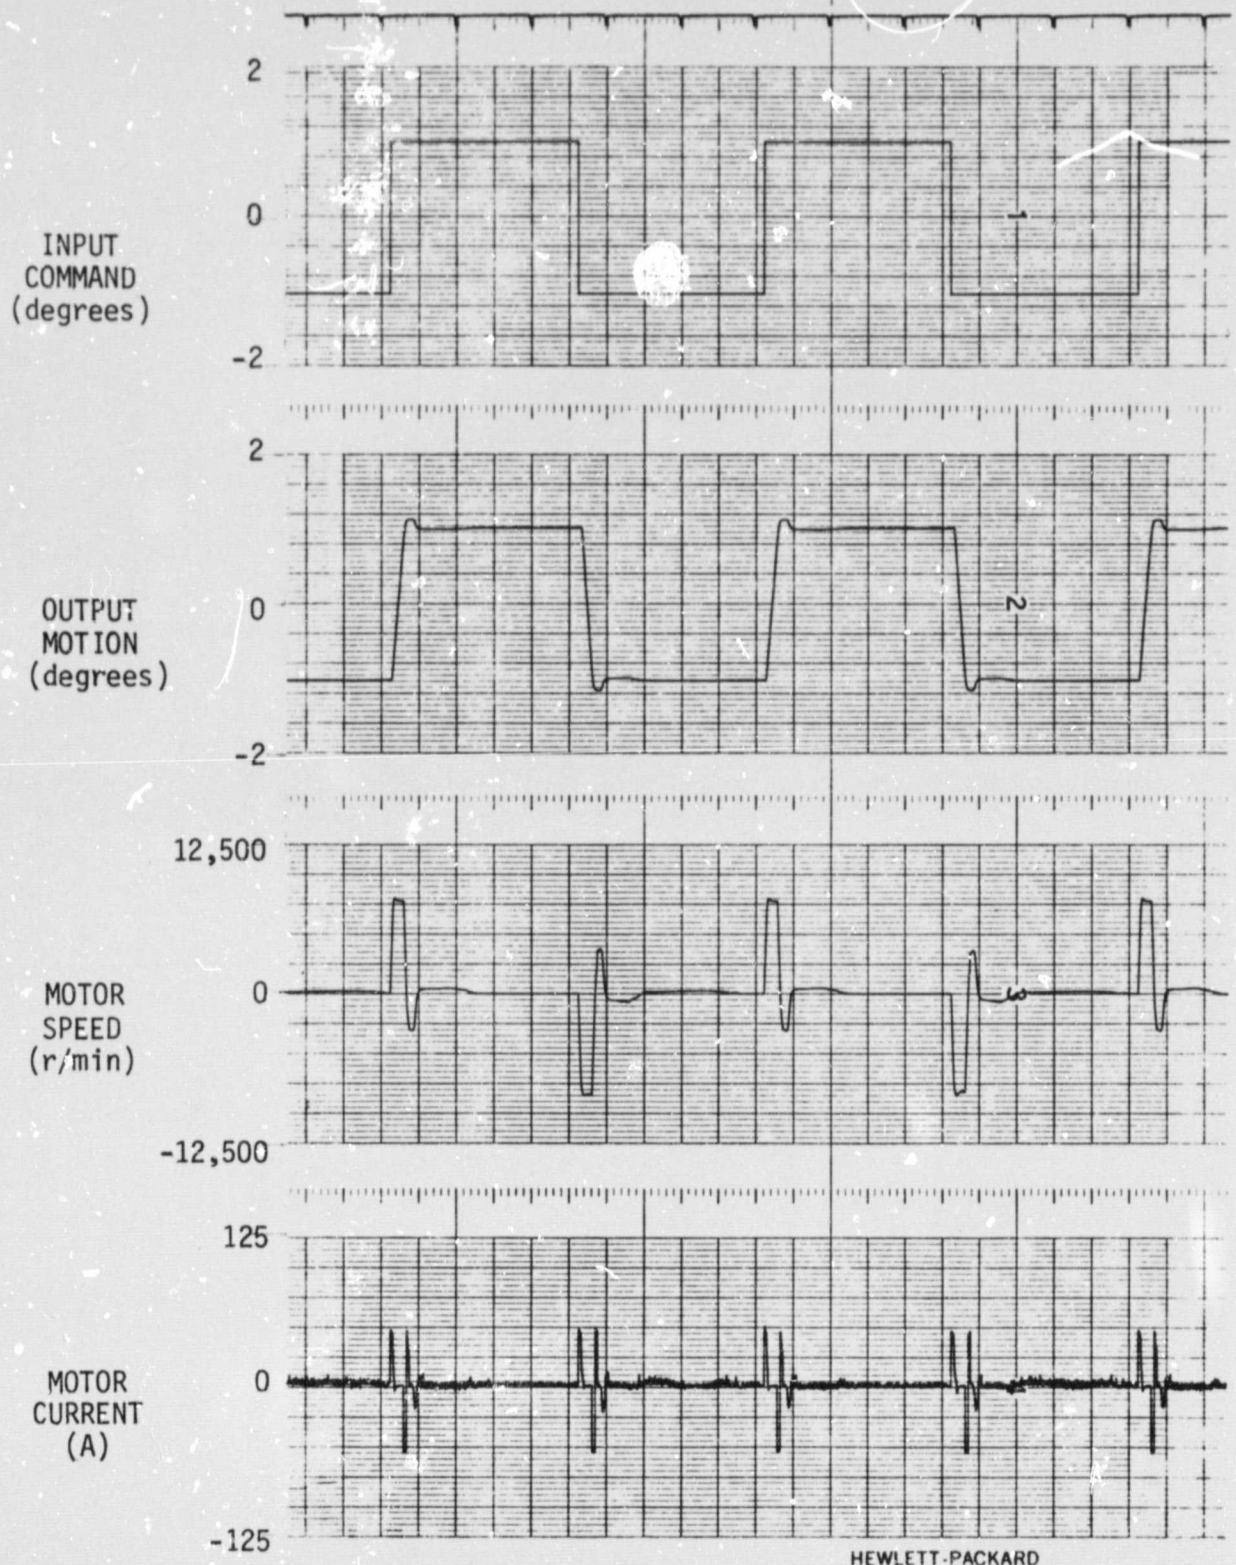


Figure 7-7 (d). Step Response to 5% Command
 $(K_p = 6,100 \text{ A/deg}, K_v = 0.17 \text{ A/r/min}, \tau = 0.00 \text{ second})$

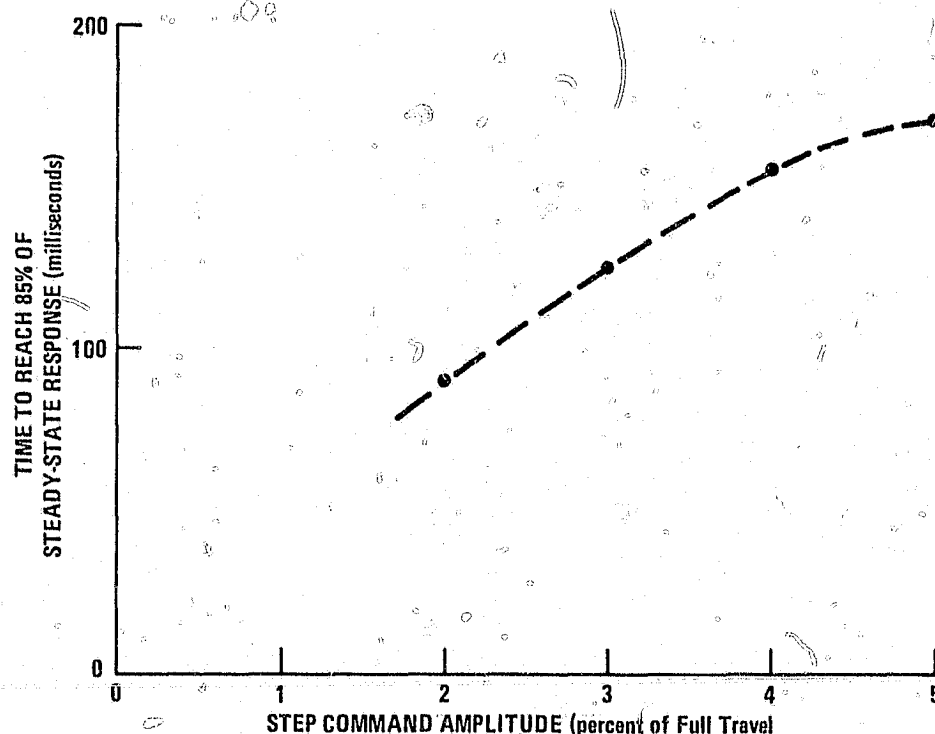


Figure 7-8. Response Time of EMA as a Function of Step Command Size

From the figure it can be seen that for step command magnitudes less than 3.8% of full travel, the system reaches 85% of its steady-state output motion in 150 milliseconds. To meet the design goal for response time of 150 milliseconds for a 5% step, the output gear ratio for the EMA would have to be reduced approximately

$$(5.0 - 3.8) / 5.0 = 24\%$$

7.3.3 LINEARITY TESTS

The purpose of this test was to show that the linear displacement of the EMA, defined as the relationship between the input position command signal and the output position as measured by the output position transducer, is linear within $\pm 1\%$ of full travel.

The Frequency Response Analyzer was used in this test to provide an input command. The EMA output shaft was rotated in one-degree increments from null to full travel in one direction. At each position, the input command voltage and the EMA position transducer output were measured using digital voltmeters. The measurements were also repeated for commands in the opposite direction.

As a simple method of demonstrating the linearity of the system, a straight line was placed through the data points taken at ± 39 degrees, and the deviations of all other data points from the straight line were calculated. The data from these tests are summarized in Table 7-8. The maximum deviation was found to be 0.010 V; since the scaling is 4 degrees per volt, this would correspond to a deviation of 0.040 degree. In terms of 55 degrees of full travel, the largest deviation was

$$(0.010)(4)(100)/55 = 0.073\%$$

The standard deviation was found to be:

$$(0.00254)(4)(100)/55 = 0.018\%$$

The mean deviation for these data was

$$(0.00243)(4)(100)/55 = 0.018\%$$

and the root mean square deviation was

$$(0.00350)(4)(100)/55 = 0.025\%$$

From the test measurements it was found that the linearity of the EMA was well within the design goal of 1%.

Commanded Deflection (volts) (4 deg/V)	Measured Deflection (volts) (4 deg/V)	Calculated Deviation from Straight Line (volts)	Commanded Deflection (volts) (4 deg/V)	Measured Deflection (volts) (4 deg/V)	Calculated Deviation from Straight Line (volts)
0.000	-0.004	.004	-5.000	-5.035	.004
-0.250	-0.258	.006	-5.244	-5.278	.002
-0.500	-0.506	.002	-5.502	-5.540	.004
-0.750	-0.759	.004	-5.746	-5.780	-.001
-0.994	-1.003	.003	-6.006	-6.045	.002
-1.250	-1.257	-.001	-6.244	-6.287	.005
-1.501	-1.510	-.001	-6.504	-6.552	.008
-1.750	-1.765	.004	-6.746	-6.791	-.004
-2.002	-2.017	.002	-7.003	-7.045	-.001
-2.250	-2.265	.001	-7.247	-7.399	.008
-2.500	-2.514	-.002	-7.504	-7.553	.003
-2.750	-2.770	.003	-7.745	-7.797	.005
-3.004	-2.027	.004	-8.002	-8.060	.009
-3.255	-3.275	.000	-8.250	-8.306	.006
-3.500	-3.519	-.003	-8.503	-8.553	-.002
-3.753	-3.776	.000	-8.752	-8.810	.005
-4.005	-4.030	.000	-9.004	-9.059	.000
-4.248	-4.278	.004	-9.242	-9.308	.010
-4.501	-4.533	.004	-9.498	-9.558	.003
-4.754	-4.787	.004	-9.748	-9.807	.000
+10.004	+10.060	0.004	-9.952	-10.017	.005
9.748	9.806	0.000	4.248	4.271	0.002
9.501	9.558	0.000	4.000	4.022	0.002
9.244	9.304	-.005	3.751	3.770	0.003
9.005	9.058	0.001	3.501	3.519	0.003
8.756	8.803	0.005	3.252	3.269	0.002
8.506	8.556	0.001	3.004	3.019	0.003
8.242	8.294	-.003	2.752	2.766	0.002
8.003	8.050	0.001	2.500	2.512	0.003
7.753	7.796	0.003	2.250	2.260	0.003
7.500	7.543	0.002	2.003	2.012	0.003
7.248	7.290	.001	1.746	1.753	0.003
6.996	7.036	0.001	1.500	1.505	0.004
6.752	6.790	0.002	1.256	1.260	0.003
6.502	6.539	0.002	1.002	1.004	0.004
6.252	6.287	0.002	0.747	0.748	0.003
6.002	6.036	0.002	0.497	0.497	0.002
5.748	5.780	0.002	0.258	0.255	0.004
5.501	5.532	0.002	0.002	-0.002	0.004
5.252	5.282	0.001			
4.995	5.022	0.002			
4.747	4.773	0.002			
4.494	4.519	.001			

Table 7-8. Data from Linearity Tests

7.3.4 HYSTERESIS TESTS

The purpose of this test was to demonstrate that the hysteresis of the EMA, defined as the maximum difference between output positions obtained when traveling clockwise then counterclockwise in response to 0.01 Hz sinusoidal input, does not exceed 0.05% of full travel.

The input signal for this test was provided by the Frequency Response Analyzer. The input and output signals were filtered using single-lag, low-pass filters with break frequencies of approximately 0.1 Hz. The filtered input signal and the filtered output signal were recorded using a Nicolet digital storage oscilloscope, Model 206. Figure 7-9 shows the output plotted against the input with a peak-to-peak output amplitude of 0.64 degree (at an input frequency of 0.01 Hz). On this scale, no hysteresis can be noted. Figure 7-9 also shows a segment of the same display expanded by a factor of 16. On this scale some separation can be seen. The equivalent hysteresis was found to be 400 microvolts out of 160 millivolts peak-to-peak. The angular equivalent is

$$(0.4)(0.64 \text{ degree})/160 = 0.002 \text{ degree}$$

in terms of full travel (55 degrees) the hysteresis was found to be


$$(0.002)(100)/55 = 0.004\%$$

The measured hysteresis was therefore much less than the design goal of 0.05%.

7.3.5 THRESHOLD TESTS

The purpose of this test was to demonstrate that the system threshold, defined as the largest sinusoidal input amplitude that may be applied at 0.01 Hz without producing output motion is less than 0.05% of the input signal required to achieve full travel.


The Frequency Response Analyzer was used to provide a 0.01 Hz sinusoidal input command. Both the input and output signals were filtered using low pass filters with single lags at approximately 0.1 Hz. Several of the waveforms recorded on

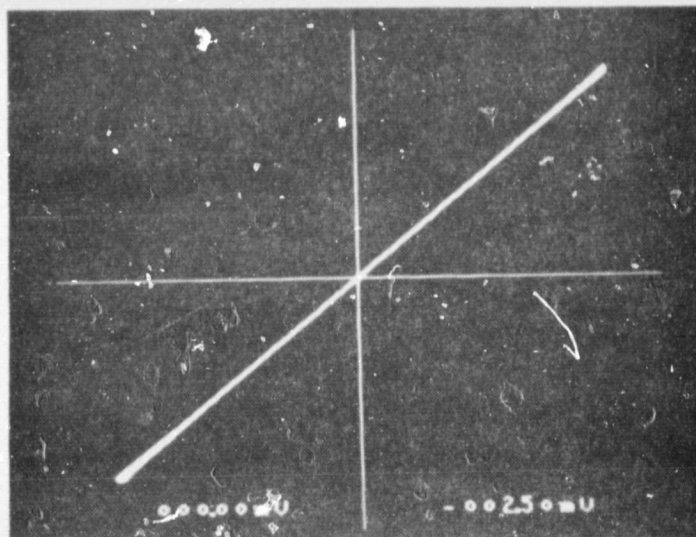

Output vs Input Motion with 0.7 Degree
Peak-to-Peak Amplitude at 0.01 Hz


ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS
OF POOR QUALITY

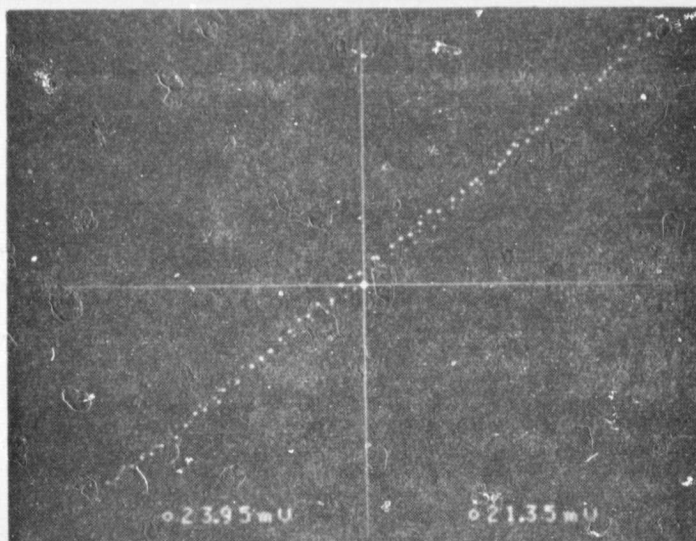


Segment of Above Display Expanded 16 Times

Figure 7-9. Hysteresis Test Displays

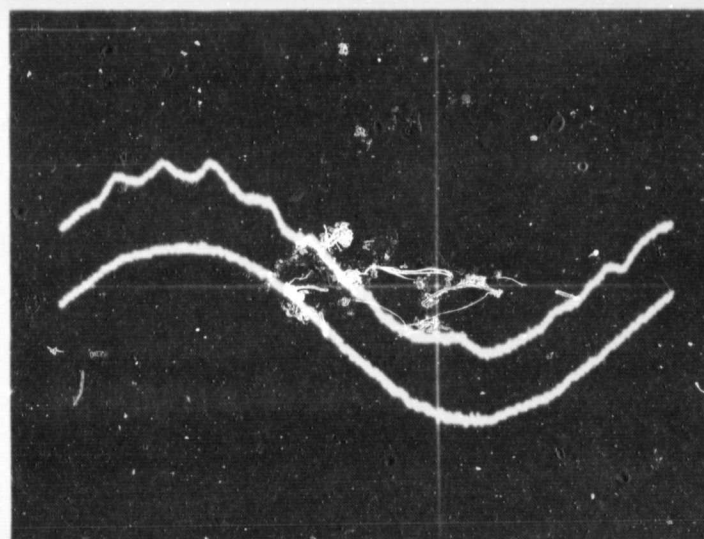

OUTPUT
INPUT

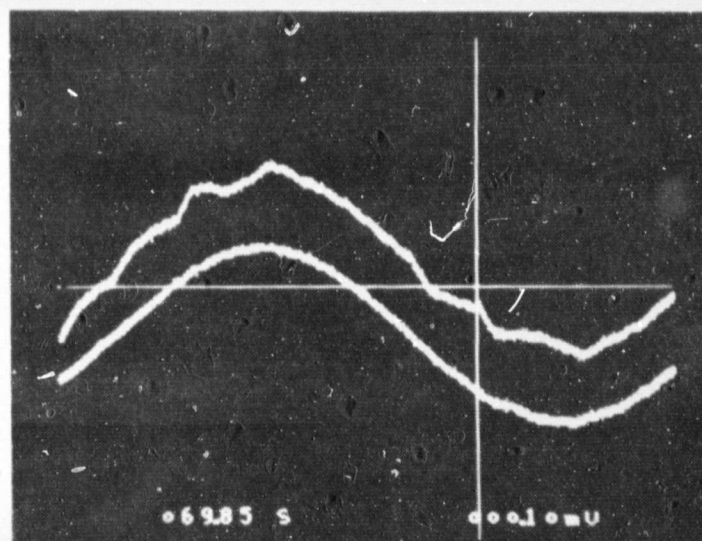

OUTPUT
INPUT

Figure 7-10. Input and Output Waveforms From Threshold Tests at an Amplitude of 0.016% of Full Travel

the storage oscilloscope are shown in Figure 7-10. The input waveform had an amplitude of 0.009 degrees for the motion, which corresponds to

$$(0.009)(100)/55 = 0.016\%$$

of full travel.

The threshold was therefore found to be much less than 0.05% of full travel.

7.3.6 OUTPUT VELOCITY TEST

The purpose of this test was to determine the maximum output velocity of the EMA. The system was driven at 0.2 Hz by the Frequency Response Analyzer with a square-wave command having an amplitude large enough to cause velocity limiting. The input command and the output position were recorded on a strip-chart recorder (see Figure 7-11). By measuring the slope of the output waveform, the output velocity of the EMA was determined to be

$$(4 \text{ degrees})/(0.295 \text{ second}) = 13.6 \text{ degrees/second}$$

As an additional check on this measurement, the slewing speed of the motor (again from Figure 7-11) was found to be approximately 8,200 r/min. With a gear ratio of about 3,600:1 for the instrumentation gearbox, the output speed is found to be

$$(8,200 \text{ r/min})(360 \text{ deg/rev})(1 \text{ min}/60\text{s})/3,600 = 13.7 \text{ degrees/second}$$

Figure 7-11 also shows the effects of backlash and windup. The motor current builds up very rapidly after the step change in the input command. The motor rpm trace also responds quickly to the input command, but the output motion (as sensed by the potentiometer coupled to the output shaft) shows a dead time of approximately 0.05 second. This effect is probably a result of backlash in the instrumentation geartrain and the effects of stiction and windup associated with the potentiometer's wiper and film element. With anti-backlash gearing and an output position sensor having no sliding contact, these effects could undoubtedly be reduced significantly.

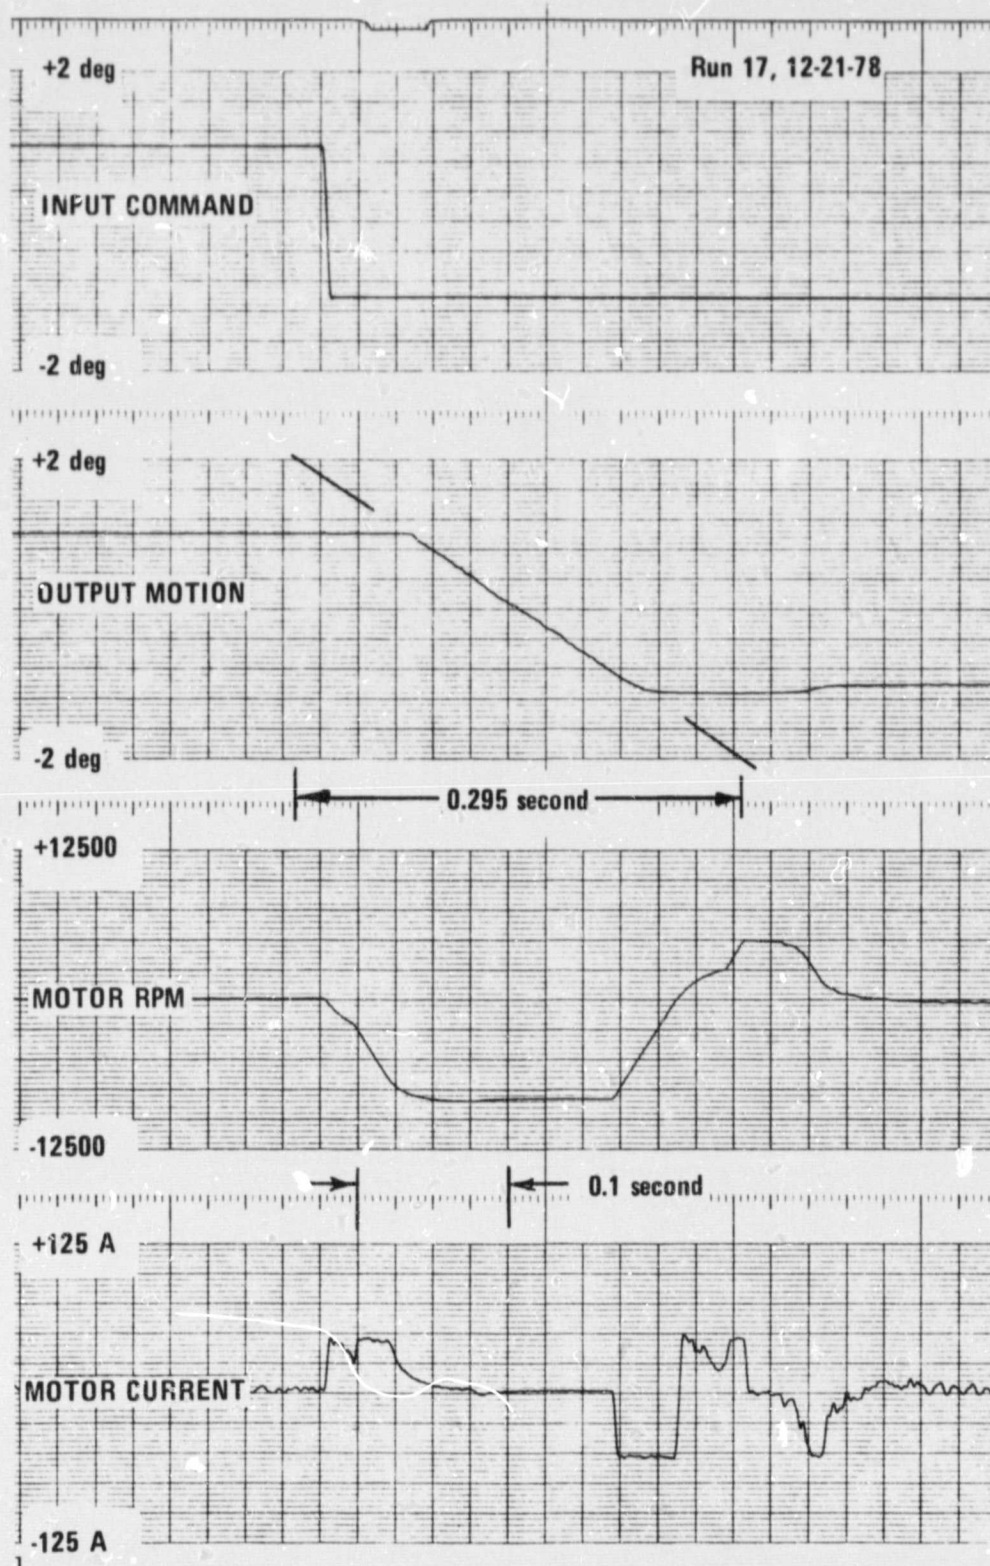


Figure 7-11. Waveforms from Output Velocity Test

7.3.7 POSITION NULL TEST

The purpose of this test was to demonstrate that with the input signal at zero, and with the position offset control set at zero, the output position of the EMA measured from its neutral position does not exceed 0.5% of full travel.

The null position of the EMA was measured and was found to be less than ± 0.2 degree. The 0.5% position null design goal corresponds to an output of


$$(55 \text{ degrees})(0.005)=0.275 \text{ degree}$$

The EMA therefore met the design goal for position null accuracy.

APPENDIX
SYSTEM SCHEMATICS

This appendix contains the schematic diagrams for the single-channel electro-mechanical actuator.

ORIGINAL PAGE IS
OF POOR QUALITY

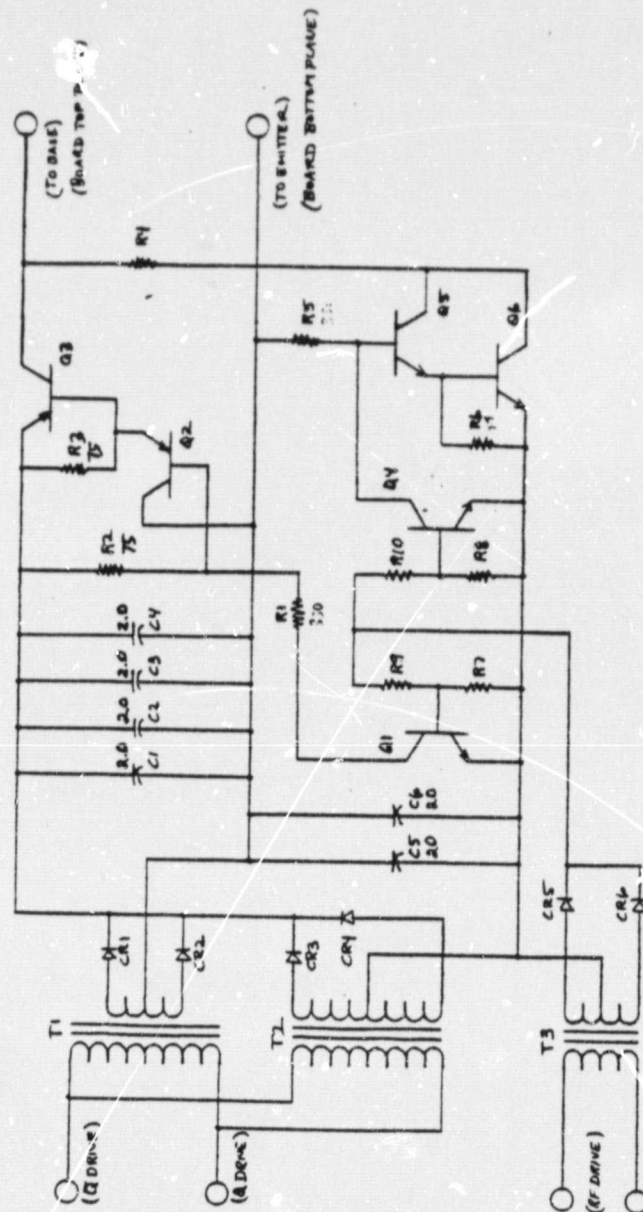

PARTS LIST

C1-C4	(2EA) 100µF 50VDC, K12B105K3W, CRC (UN PARALLEL)
C5, C6	20µF 30VDC, M12A 20K5L, -CRC
CR1, CR2	1N5831, SCHOTTKY RECT, MOTOROLA, 1N-32 STD
CR3, CR4	1N4079, SUPER FAST REC. SE. RECT., SEMTECH
Q1, Q4, Q5	2N5320, NPN, TO-5, RCA
Q2	2N5333, PNP, TO-5, TI
Q3	2N6377, PNP, TO-3, MOTOROLA
Q6	2N6274, NPN, TO-3, MOTOROLA
R1, R5	330, 1W, 5%, CARBON RESISTOR
R2, R3, R6	75, 1/2W, 5%, " "
R4	TBD
R7, R8	200, 1W, 5%, CARBON RESISTOR
R9, R10	1K, 1/2W, 5%, " "

NOTES


- T1 IS DELCO DESIGN XT77005
- T2 IS DELCO DESIGN XT77006
- T3 IS DELCO DESIGN XT77007
- CR1, CR2 MOUNTED WITH AMM 436-125 HEATSINK
- Q2 MOUNTED WITH AMM 436-125 HEATSINK
- Q3 MOUNTED WITH AMM 436-125-TO3 AND AMM 435 HEATSINKS
- Q6 MOUNTED WITH AMM 435 HEATSINK
- USE HEATSINK THERMAL COMPOUND IN MOUNTING CR1, CR2, Q2, Q3, AND Q6

CONSTRUCT II BOARD


PCB DESIGNATION - A11DRIVER

REV A L.A.B.
01/17/79

DESIGNATION		A11DRIVER	
DATE	01/17/79	SCALE	1:1
DESIGNED BY	J.M.B.	CHECKED BY	J.M.B.
APPROVED BY	J.M.B.	DATE	01/17/79
PROJECT		A11DRIVER	
SHEET		1 OF 1	
PARTS LIST		A11DRIVER	
C 13160		5K001239	
REV A		L.A.B.	

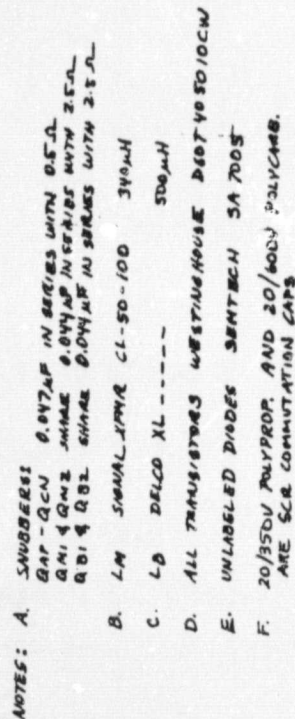[illegible]

ORIGINAL PAGE IS
OF POOR QUALITY

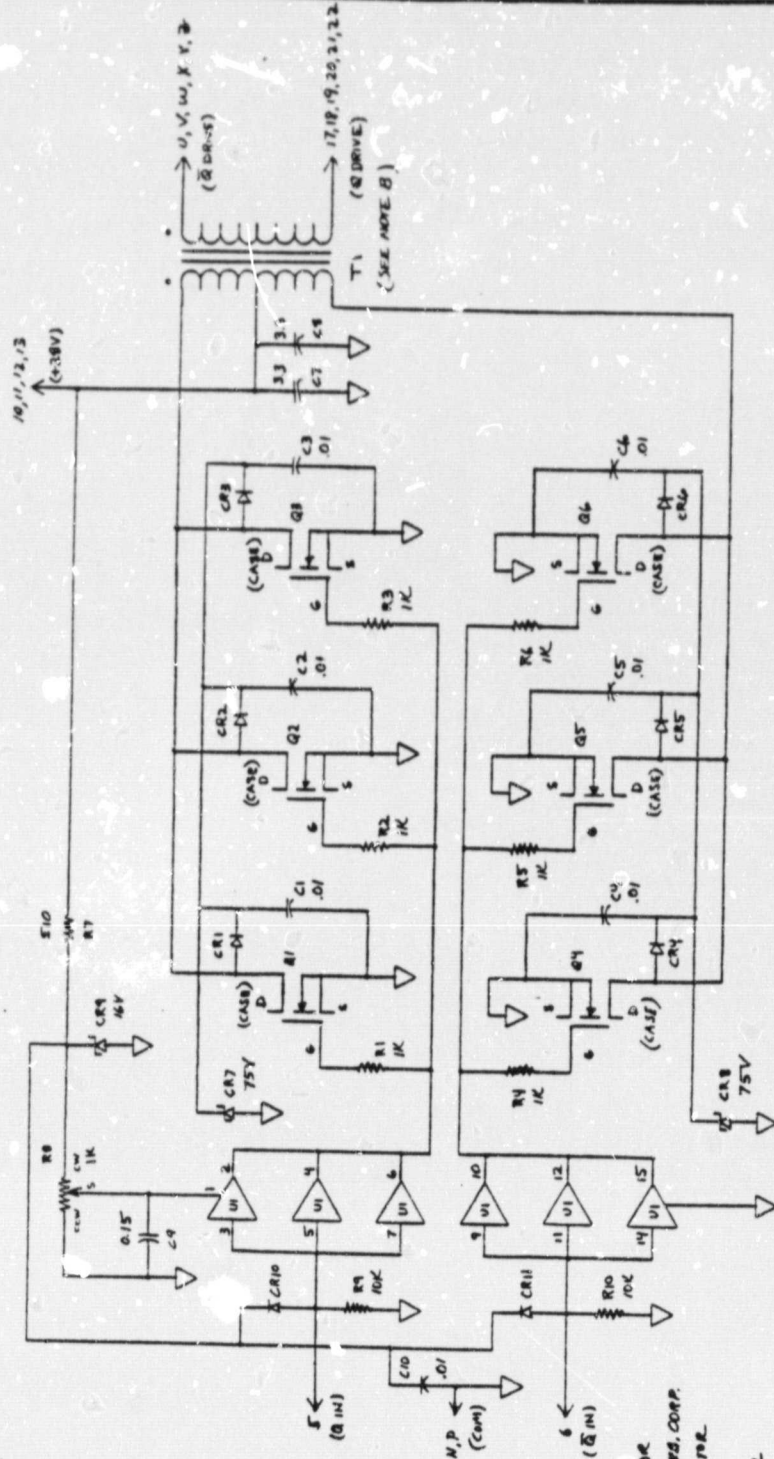

(CONDUCTOR
SEE NOTE A)

2, B, E, F, H, J, K, L, M, N, P
(COM)

PARTS LIST

- C1-C6, C10 0.01μF, CK05, CERAMIC CAPACITOR
- C7, C8 33μF/50V M12B335KSC, CONRAD, CONRAD CORP.
- C9 0.15μF, CK06, CERAMIC CAPACITOR
- C10 0.15μF, CK06, CERAMIC CAPACITOR
- CR1-CR6, CR10, CR11 1N4001, SI DIODE
- CR7, CR8 1N4001, SI DIODE
- CR9 1N5558B, 1N4001, SI DIODE
- R1-R6 1K, 1W, 5%, CARBON RESISTOR
- R7 50K, 1W, 5%, " "
- R8 1K, 20W, TRIMPOT, BOURNES, 325W-1-102
- R9, R10 10K, 1W, 5%, CARBON RESISTOR
- Q1-Q6 2N4651, VHSFET, SILICONIX, TO-3
- U1 CP4C500E, CMOS, RCA



NOTES

1. MATING CONNECTOR, ELCO 60-6007-044-450-013
2. T1 IS DELCO DESIGN XT7700B
3. U1-PINS 13, 16, NO CONNECTIONS ALLOWED
4. Q1-Q6 MOUNTED ON ANAM 456-125-703 MPM51UK WITH WAREFIELD 177-3-62 B&O INSULATOR AND THERMAL COMPOUND

CONSTRAINT 4 BOMBS
PCB DESIGNATION - A10BDS


REV A DMB
8/17/79

DATE: 8/17/79		REV: A	
DESIGN: 13160		PART: 1	
SCALE: 1/1		SHEET: 1	
DRAWN: G.V.B. W17		CHECKED: W17	
APPROVED: W17		DATE: 8/17/79	
PROJECT: NASA HIGH POWER BASE DRIVER - POWER SUPPLY (3 REQUIRED)		SCHEMATIC DIAGRAM	
C 13160		5K 001241	

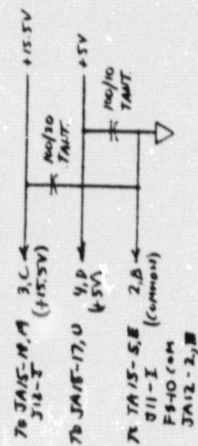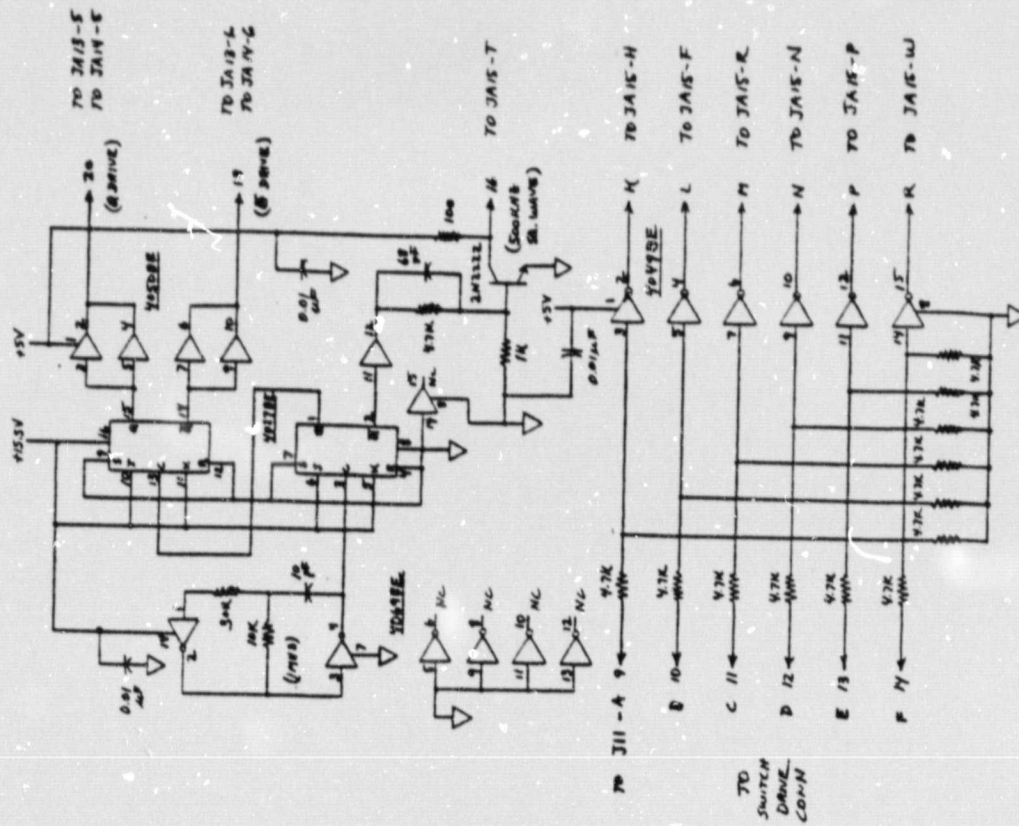

REV. 0. N. B. 01/17/74


Defcon Electronics 10000 S. 10th Ave. Suite 100 Aurora, CO 80015	
CUSTOMER: ALAS PROJECT: Q-2 DRIVE	DRAWING NO: SK002076 SCALE: 1:1
DATE: 01/17/74 BY: ALAS CHECKED: ALAS	SHEET: 1 OF 2

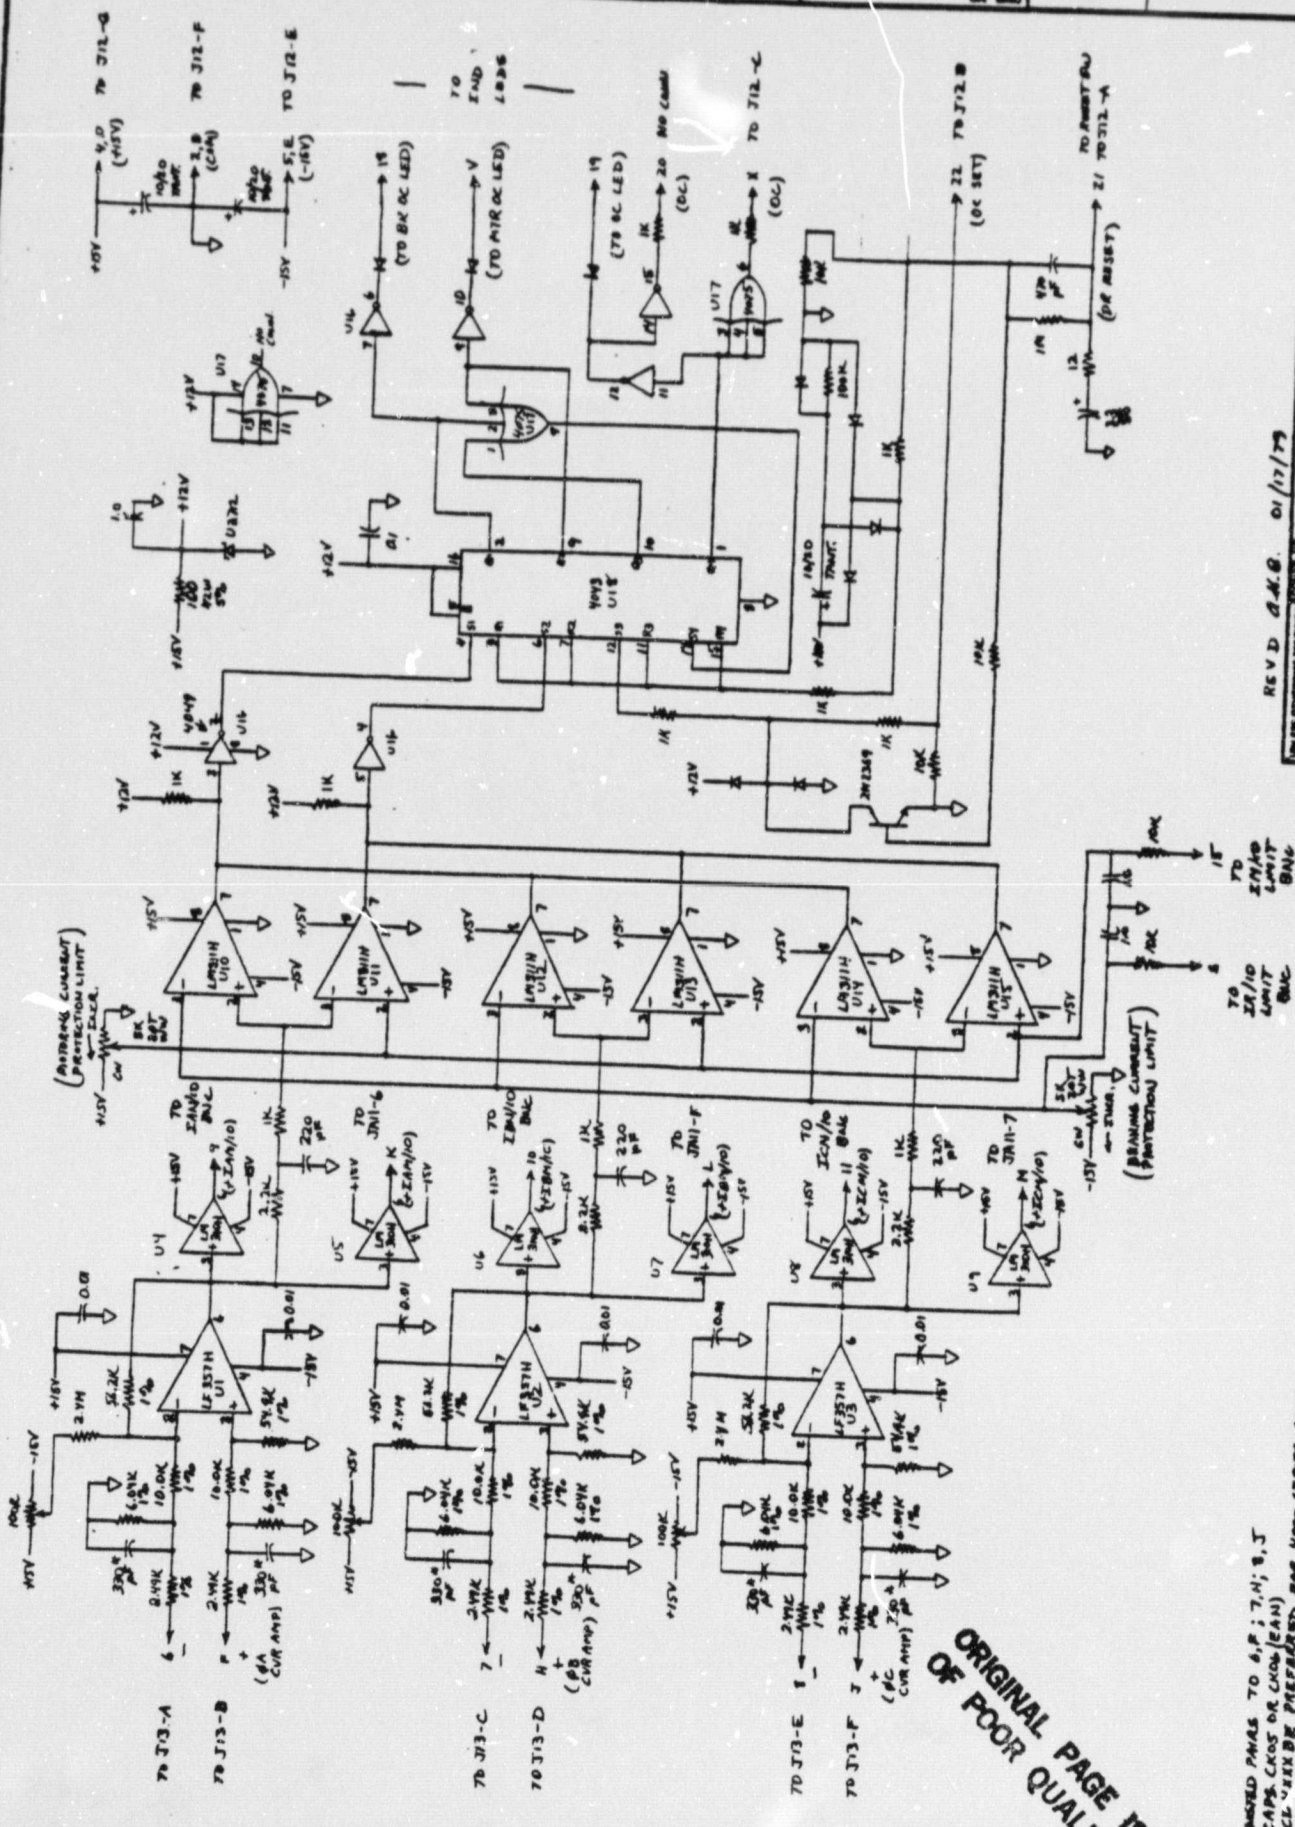

NOTE I: THINDED PAIRS TO 4-P; 7-N; 8, J
NOTE H: CAPS CLOS OR CLOS (CAN)
NOTE G: CL* HERE BE PREFERRED FOR VARIOUS SERIES CLOS
NOTE F: FOR LA HELF TYPED SUBS. L-2--- OR L-1--
NOTE E: A-CAPS ATTACHED @ 1%
NOTE D: ALL CAPACITOR VALUES IN MICROGRAMS (GAM)
NOTE C: ALL 1% RESISTORS RATED OR NMUOD
NOTE B: ALL RESISTORS WHO 5% EXCEPT AS NOTED (BAN)
NOTE A: ALL DIODES INVING OR INVING


ORIGINAL PAGE IS
OF POOR QUALITY

[illegible]

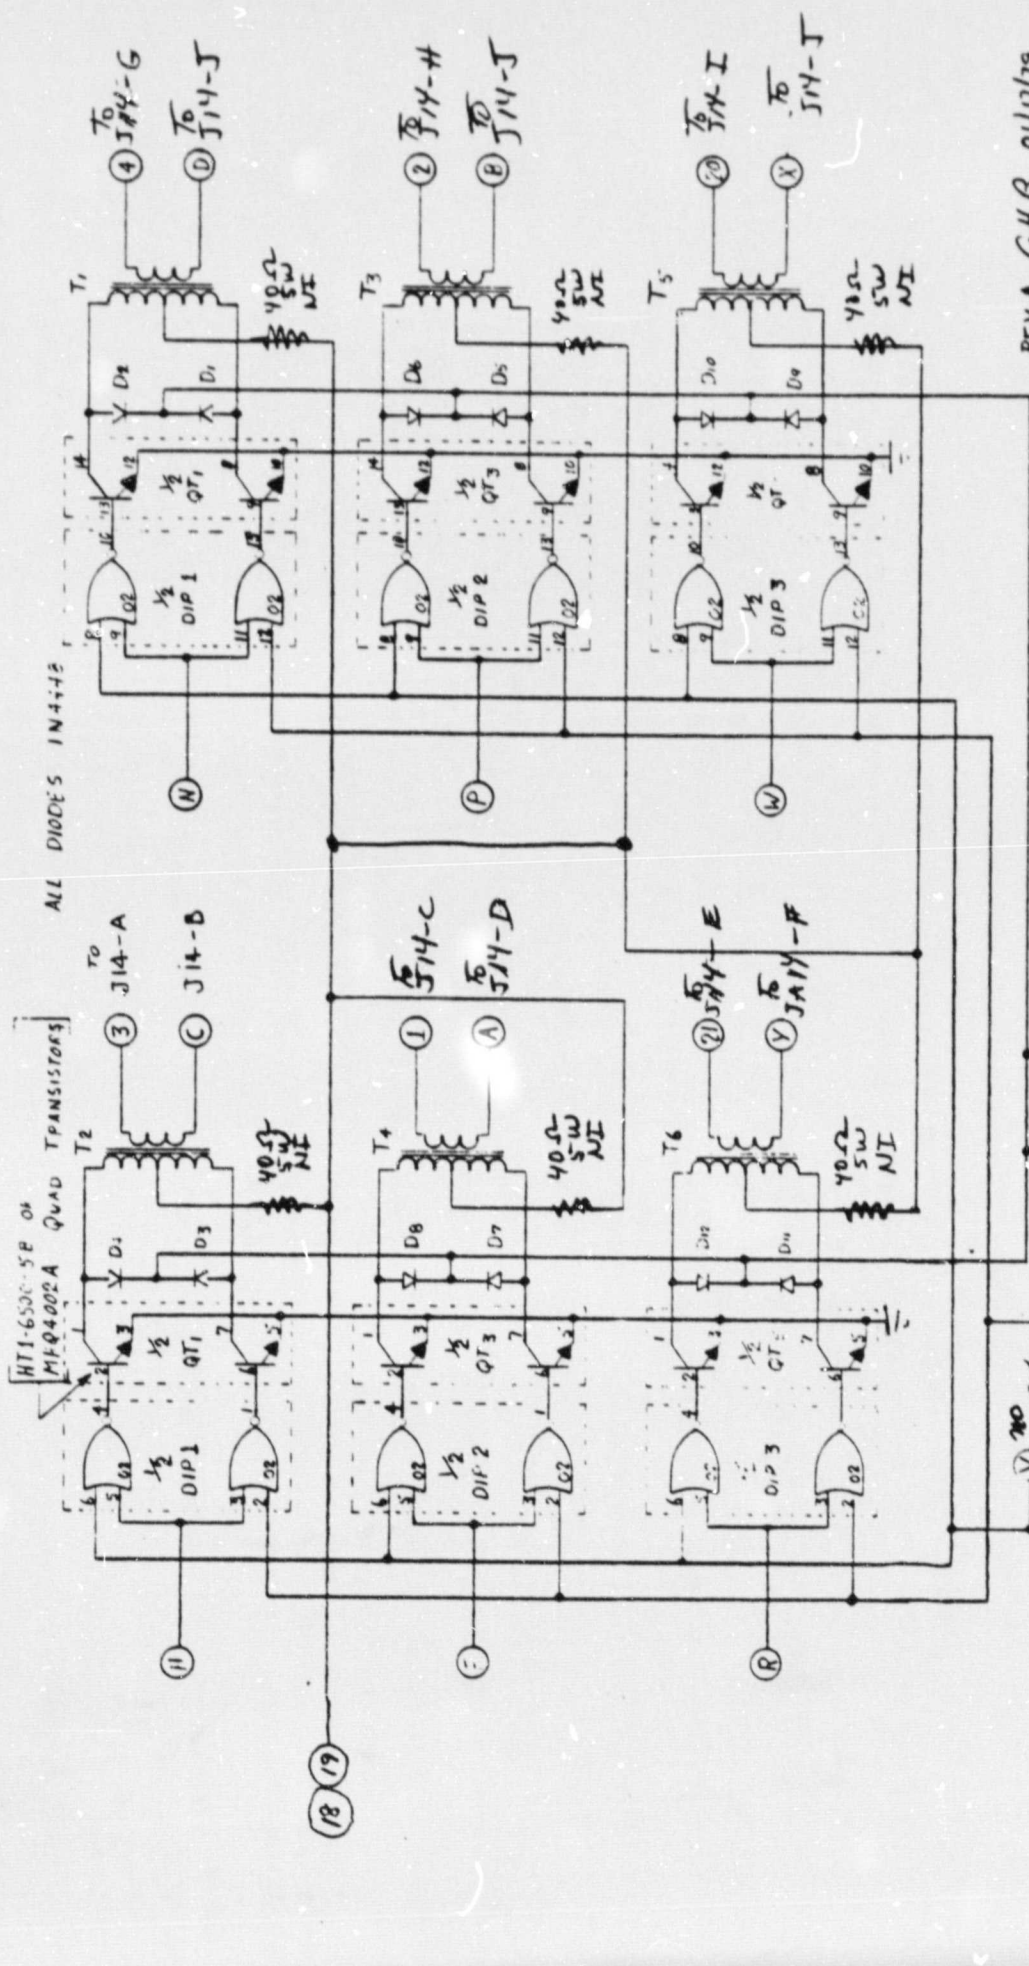

REV A GMB. 01/17/79


CONTR NO		8-12-71	
DESIGN	Tucker	8-12-71	
CHECKER	USDA		
DESIGN	Al Barrett	71	
APPRO			
DESIGN ACTIVITY	APPRO		
OTHER APPROVAL			
Delco Electronics		GENERAL MOTORS CORPORATION SANTA BARBARA, CALIF	
		TITLE SCHEMATIC - ELECT.	
		REV A	
		SIZE CODE IDENT NO	
		B 13160	
		SK002078	
		SCALE	
		SHEET 1 OF 1	

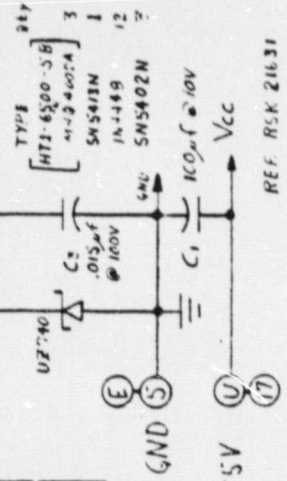

L1, L2 = 6 Turns #26 on core F625-92-06




CLASSIFICATION AND CONTROL INSTRUCTIONS	DATE	OTHER SIZE	DATE	OTHER SIZE	DATE	OTHER SIZE
1. CLASSIFICATION AND CONTROL INSTRUCTIONS	2. DATE	3. OTHER SIZE	4. DATE	5. OTHER SIZE	6. DATE	7. OTHER SIZE
8. DATE	9. OTHER SIZE	10. DATE	11. OTHER SIZE	12. DATE	13. OTHER SIZE	14. DATE
15. DATE	16. OTHER SIZE	17. DATE	18. OTHER SIZE	19. DATE	20. OTHER SIZE	21. DATE
22. DATE	23. OTHER SIZE	24. DATE	25. OTHER SIZE	26. DATE	27. OTHER SIZE	28. DATE
29. DATE	30. OTHER SIZE	31. DATE	32. OTHER SIZE	33. DATE	34. OTHER SIZE	35. DATE
36. DATE	37. OTHER SIZE	38. DATE	39. OTHER SIZE	40. DATE	41. OTHER SIZE	42. DATE
43. DATE	44. OTHER SIZE	45. DATE	46. OTHER SIZE	47. DATE	48. OTHER SIZE	49. DATE
50. DATE	51. OTHER SIZE	52. DATE	53. OTHER SIZE	54. DATE	55. OTHER SIZE	56. DATE
57. DATE	58. OTHER SIZE	59. DATE	60. OTHER SIZE	61. DATE	62. OTHER SIZE	63. DATE
64. DATE	65. OTHER SIZE	66. DATE	67. OTHER SIZE	68. DATE	69. OTHER SIZE	70. DATE
71. DATE	72. OTHER SIZE	73. DATE	74. OTHER SIZE	75. DATE	76. OTHER SIZE	77. DATE
78. DATE	79. OTHER SIZE	80. DATE	81. OTHER SIZE	82. DATE	83. OTHER SIZE	84. DATE
85. DATE	86. OTHER SIZE	87. DATE	88. OTHER SIZE	89. DATE	90. OTHER SIZE	91. DATE
92. DATE	93. OTHER SIZE	94. DATE	95. OTHER SIZE	96. DATE	97. OTHER SIZE	98. DATE
99. DATE	100. OTHER SIZE	101. DATE	102. OTHER SIZE	103. DATE	104. OTHER SIZE	105. DATE
106. DATE	107. OTHER SIZE	108. DATE	109. OTHER SIZE	110. DATE	111. OTHER SIZE	112. DATE
113. DATE	114. OTHER SIZE	115. DATE	116. OTHER SIZE	117. DATE	118. OTHER SIZE	119. DATE
120. DATE	121. OTHER SIZE	122. DATE	123. OTHER SIZE	124. DATE	125. OTHER SIZE	126. DATE
127. DATE	128. OTHER SIZE	129. DATE	130. OTHER SIZE	131. DATE	132. OTHER SIZE	133. DATE
134. DATE	135. OTHER SIZE	136. DATE	137. OTHER SIZE	138. DATE	139. OTHER SIZE	140. DATE
141. DATE	142. OTHER SIZE	143. DATE	144. OTHER SIZE	145. DATE	146. OTHER SIZE	147. DATE
148. DATE	149. OTHER SIZE	150. DATE	151. OTHER SIZE	152. DATE	153. OTHER SIZE	154. DATE
155. DATE	156. OTHER SIZE	157. DATE	158. OTHER SIZE	159. DATE	160. OTHER SIZE	161. DATE
162. DATE	163. OTHER SIZE	164. DATE	165. OTHER SIZE	166. DATE	167. OTHER SIZE	168. DATE
169. DATE	170. OTHER SIZE	171. DATE	172. OTHER SIZE	173. DATE	174. OTHER SIZE	175. DATE
176. DATE	177. OTHER SIZE	178. DATE	179. OTHER SIZE	180. DATE	181. OTHER SIZE	182. DATE
183. DATE	184. OTHER SIZE	185. DATE	186. OTHER SIZE	187. DATE	188. OTHER SIZE	189. DATE
190. DATE	191. OTHER SIZE	192. DATE	193. OTHER SIZE	194. DATE	195. OTHER SIZE	196. DATE
197. DATE	198. OTHER SIZE	199. DATE	200. OTHER SIZE	201. DATE	202. OTHER SIZE	203. DATE
204. DATE	205. OTHER SIZE	206. DATE	207. OTHER SIZE	208. DATE	209. OTHER SIZE	210. DATE
211. DATE	212. OTHER SIZE	213. DATE	214. OTHER SIZE	215. DATE	216. OTHER SIZE	217. DATE
218. DATE	219. OTHER SIZE	220. DATE	221. OTHER SIZE	222. DATE	223. OTHER SIZE	224. DATE
225. DATE	226. OTHER SIZE	227. DATE	228. OTHER SIZE	229. DATE	230. OTHER SIZE	231. DATE
232. DATE	233. OTHER SIZE	234. DATE	235. OTHER SIZE	236. DATE	237. OTHER SIZE	238. DATE
239. DATE	240. OTHER SIZE	241. DATE	242. OTHER SIZE	243. DATE	244. OTHER SIZE	245. DATE
246. DATE	247. OTHER SIZE	248. DATE	249. OTHER SIZE	250. DATE	251. OTHER SIZE	252. DATE
253. DATE	254. OTHER SIZE	255. DATE	256. OTHER SIZE	257. DATE	258. OTHER SIZE	259. DATE
260. DATE	261. OTHER SIZE	262. DATE	263. OTHER SIZE	264. DATE	265. OTHER SIZE	266. DATE
267. DATE	268. OTHER SIZE	269. DATE	270. OTHER SIZE	271. DATE	272. OTHER SIZE	273. DATE
274. DATE	275. OTHER SIZE	276. DATE	277. OTHER SIZE	278. DATE	279. OTHER SIZE	280. DATE
281. DATE	282. OTHER SIZE	283. DATE	284. OTHER SIZE	285. DATE	286. OTHER SIZE	287. DATE
288. DATE	289. OTHER SIZE	289. DATE	290. OTHER SIZE	291. DATE	292. OTHER SIZE	293. DATE
294. DATE	295. OTHER SIZE	296. DATE	297. OTHER SIZE	298. DATE	299. OTHER SIZE	300. DATE
301. DATE	302. OTHER SIZE	303. DATE	304. OTHER SIZE	305. DATE	306. OTHER SIZE	307. DATE
308. DATE	309. OTHER SIZE	310. DATE	311. OTHER SIZE	312. DATE	313. OTHER SIZE	314. DATE
315. DATE	316. OTHER SIZE	317. DATE	318. OTHER SIZE	319. DATE	320. OTHER SIZE	321. DATE
322. DATE	323. OTHER SIZE	324. DATE	325. OTHER SIZE	326. DATE	327. OTHER SIZE	328. DATE
329. DATE	330. OTHER SIZE	331. DATE	3			




ALL NOTES ON "VINTAGE" LOGS APPLY
NOTE JJ JUMPER PER MONTHS ONLY
(BIMPOLOGY)

[illegible]

Oct 2111 (row 2 of 7)

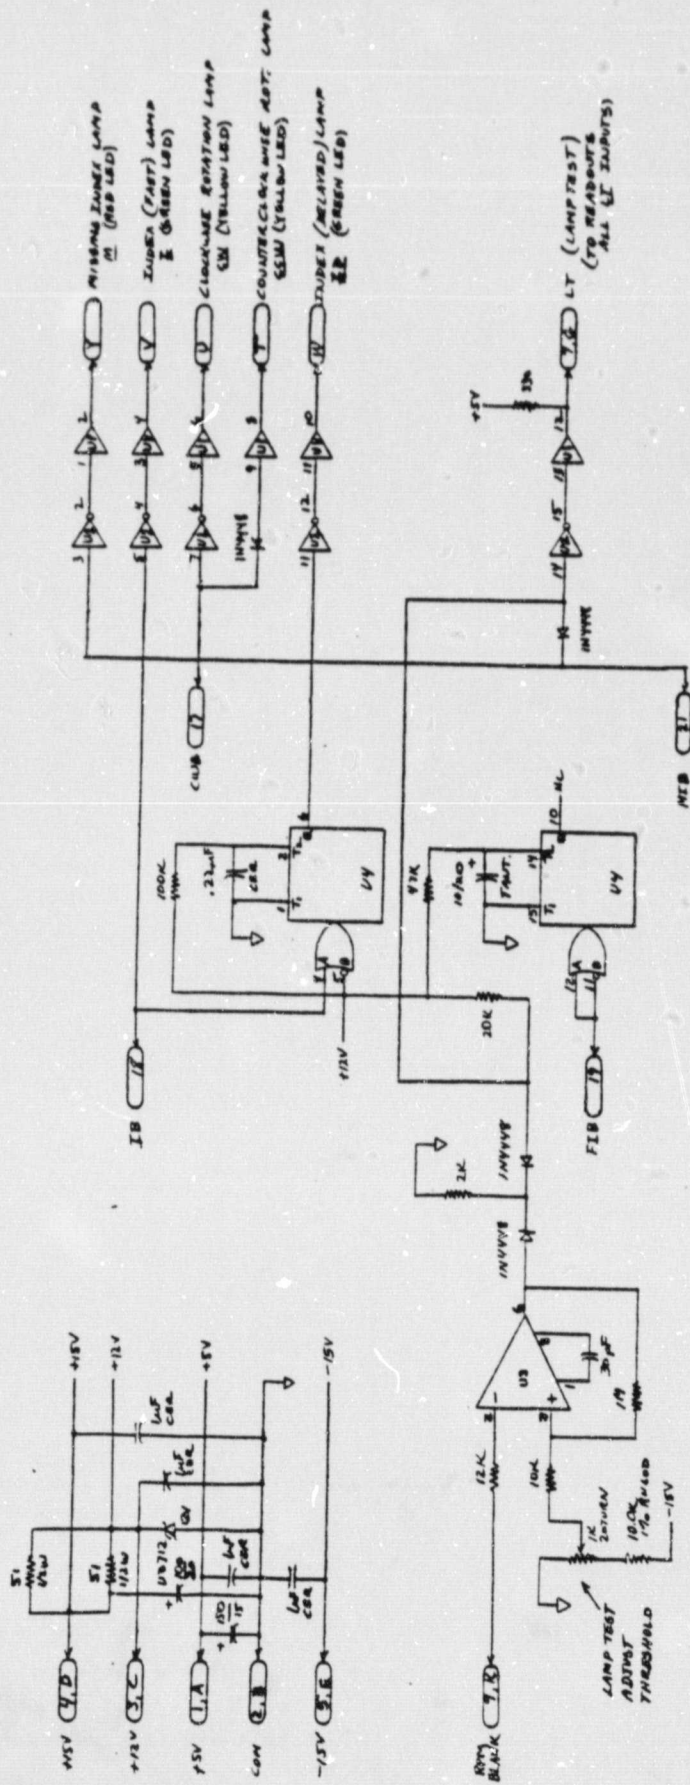

- U1 7407 7 75 CM 14 15 +5V
 U2 7401 8 8 CM 13 14 +12V
 U3 7401 4 4 CM 7 8 +15V
 U4 7401 8 8 CM 13 14 +12V
 U5 7401 4 4 CM 7 8 +15V
 U6 7400 7 75 CM 14 15 +5V



C. SEE OTHER LAMP BOARD A1

REV B 4.11.79 01/17/79



DELTA ELECTRONICS GENERAL ELECTRONICS CORPORATION SANTA BARBARA, CALIF.	
TITLE READOUT INTERFACE	
DATE 13160	SCALE 1 OF 2
PART NO. 13160	REV. B
QUANTITY 1	PRICE \$K002082
MATERIAL 13160	OTHER APPROVAL 13160

DIALCD

4 DIGIT DISPLAY AS VIEWED FROM REAR
(SEE TTL DATA BOOK, 2-LED, P7-147) (SN 7142N)

LSD

MED

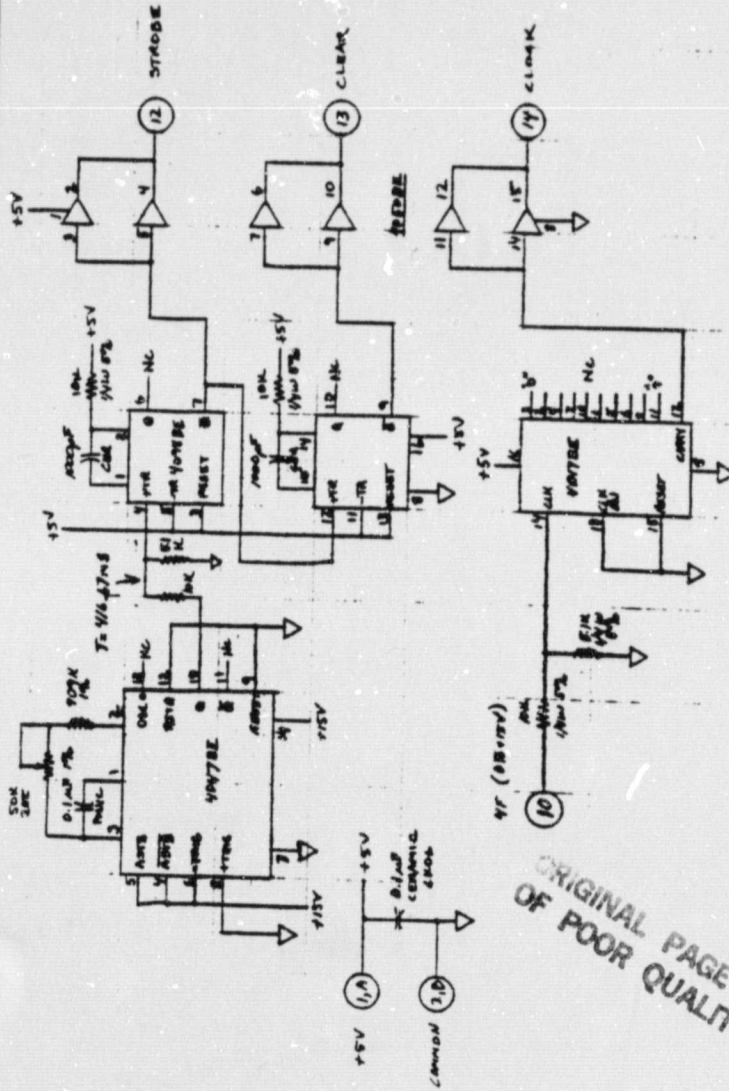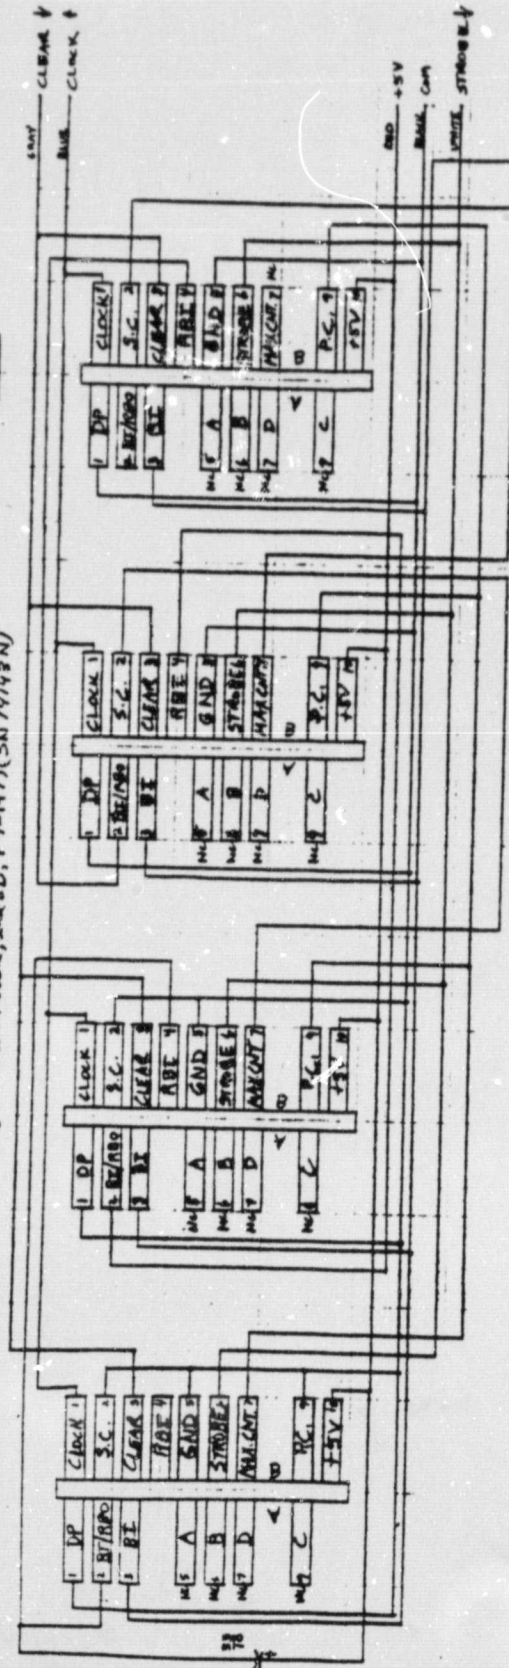


ORIGINAL PAGE IS
OF POOR QUALITY

FOR 74V73 $T = 114.7 \text{ ms}$ pin 10 = 4.5 RC
A = 928 M
TEST 1 INPUT 216.00 MHz IN 4F READ 7000 RPM

Digital Electronics	
WILL BE USED FOR THE FOLLOWING PROJECTS ONLY	
PROJECT NO.	13100 SK002082
DATE	
BY	
FOR	
APPROVED	
REVIEWED	
TESTED	
ASSEMBLED	
PACKED	
SHIPPED	
RECEIVED	
DATE	
BY	
FOR	
APPROVED	
REVIEWED	
TESTED	
ASSEMBLED	
PACKED	
SHIPPED	
RECEIVED	


ORIGINAL PAGE IS
OF POOR QUALITY

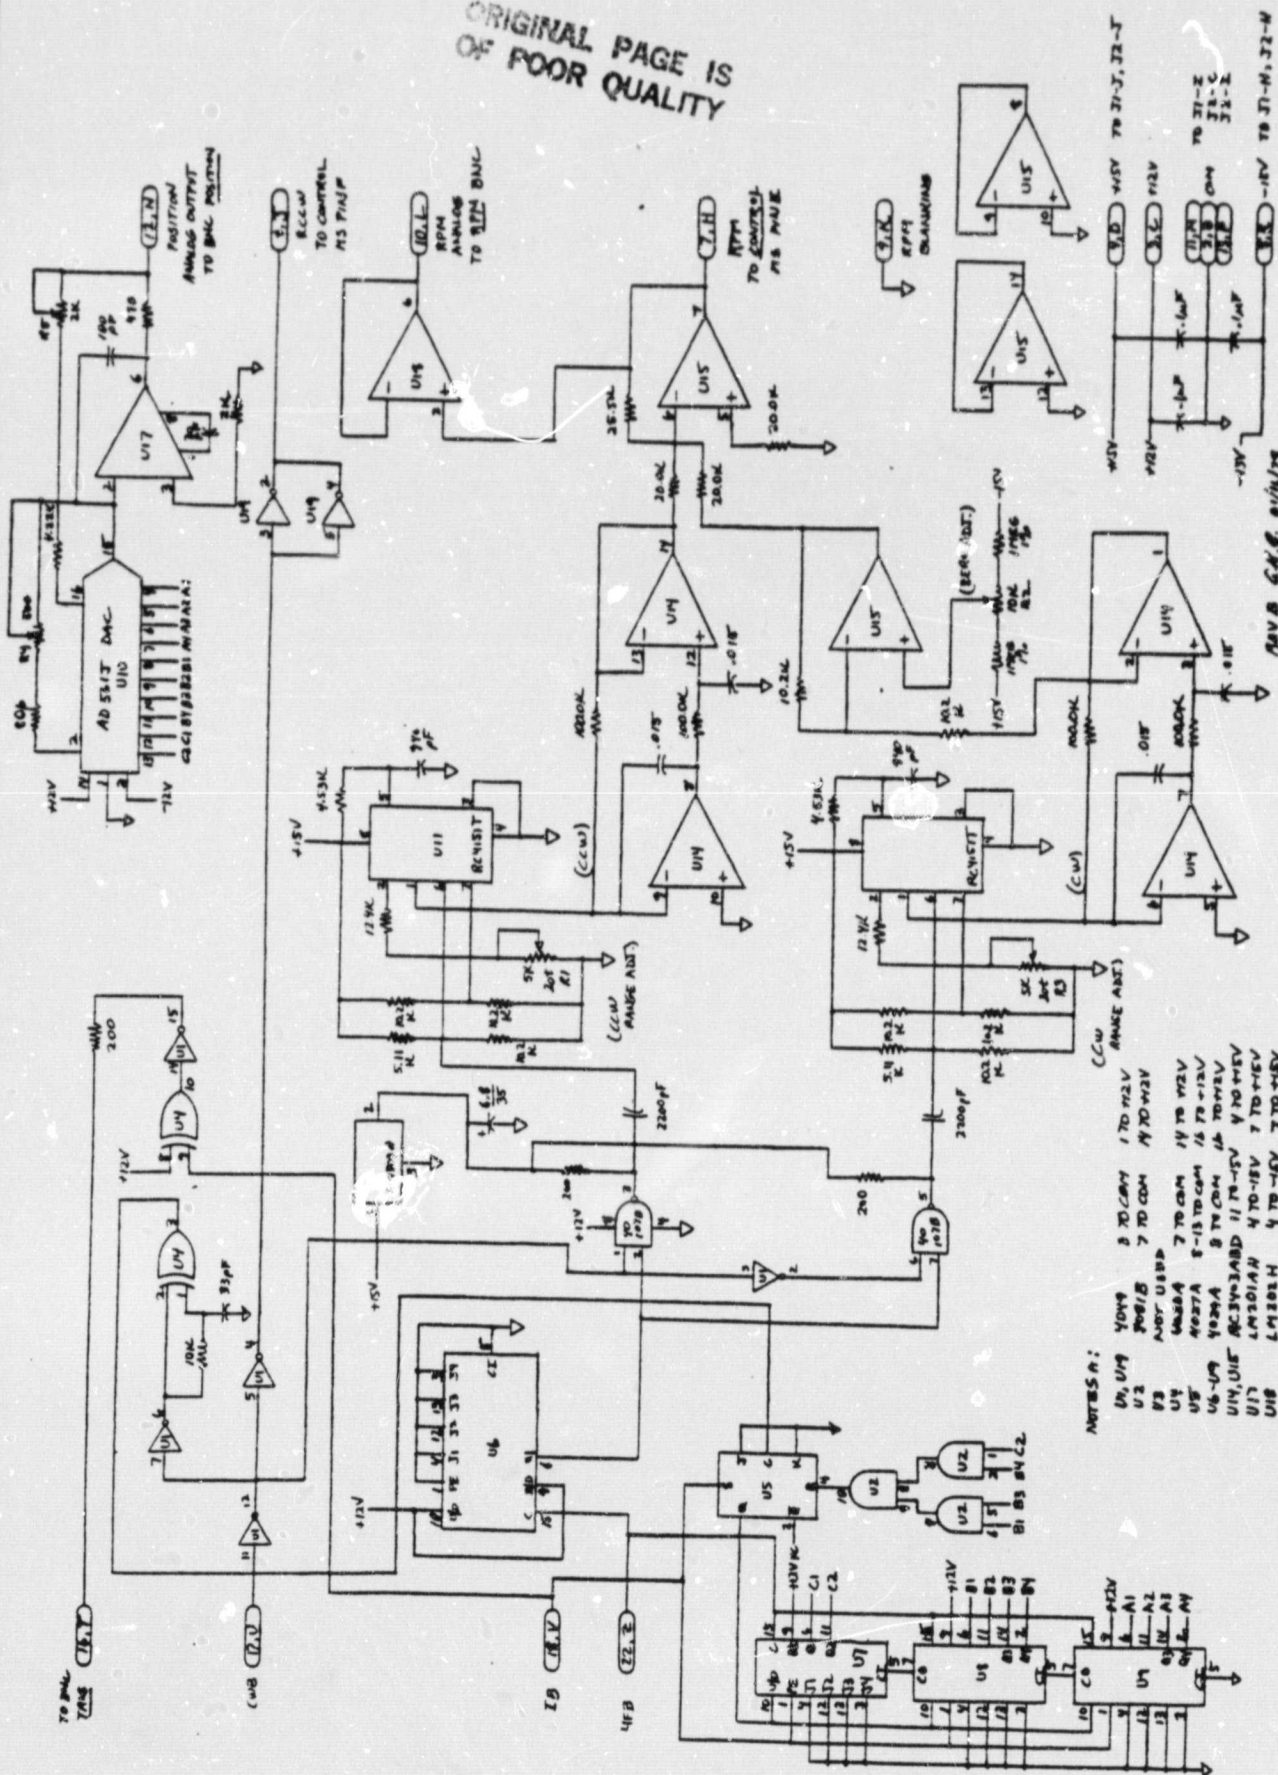[illegible]


NOTE 8: BOTTOM VIEW

RC4181T,
LM201AH,
LM202H


[illegible]

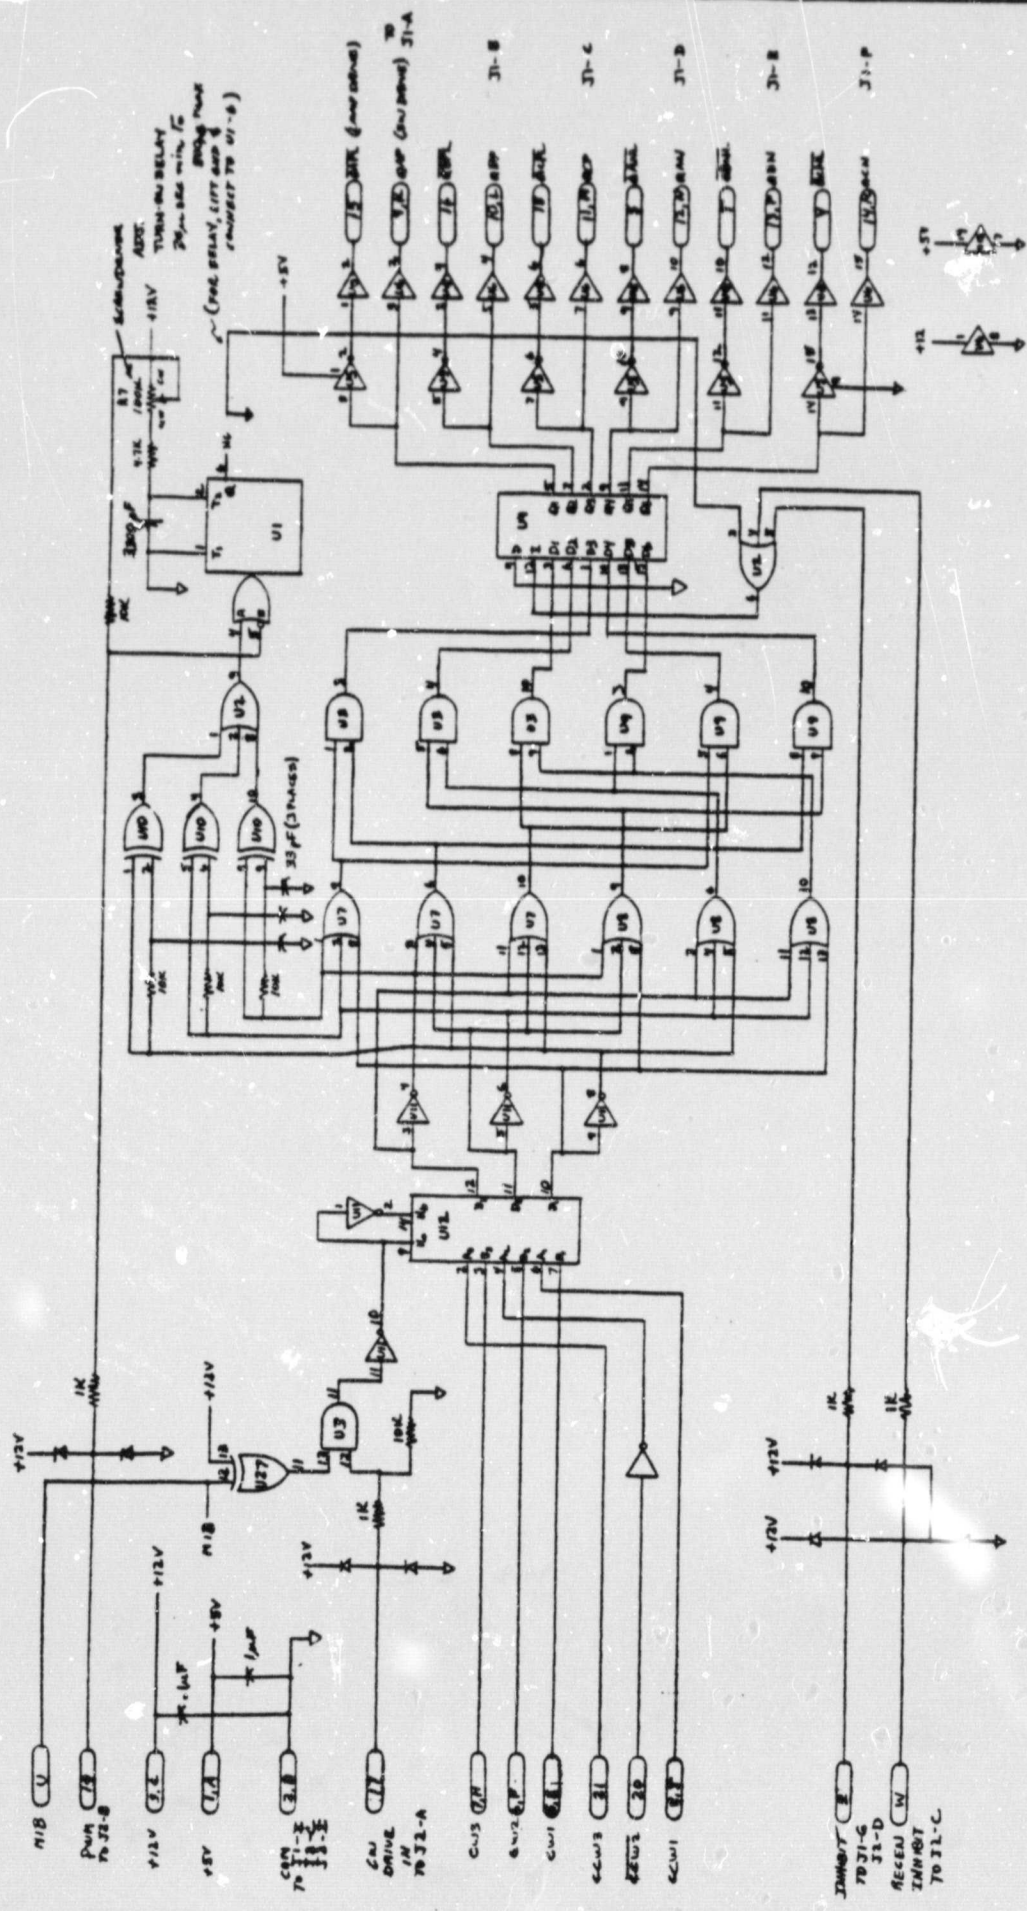

NOTES: A. U11 AC14558B 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205

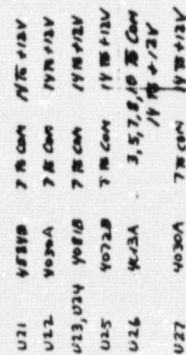

44 211 (over 2 AD)

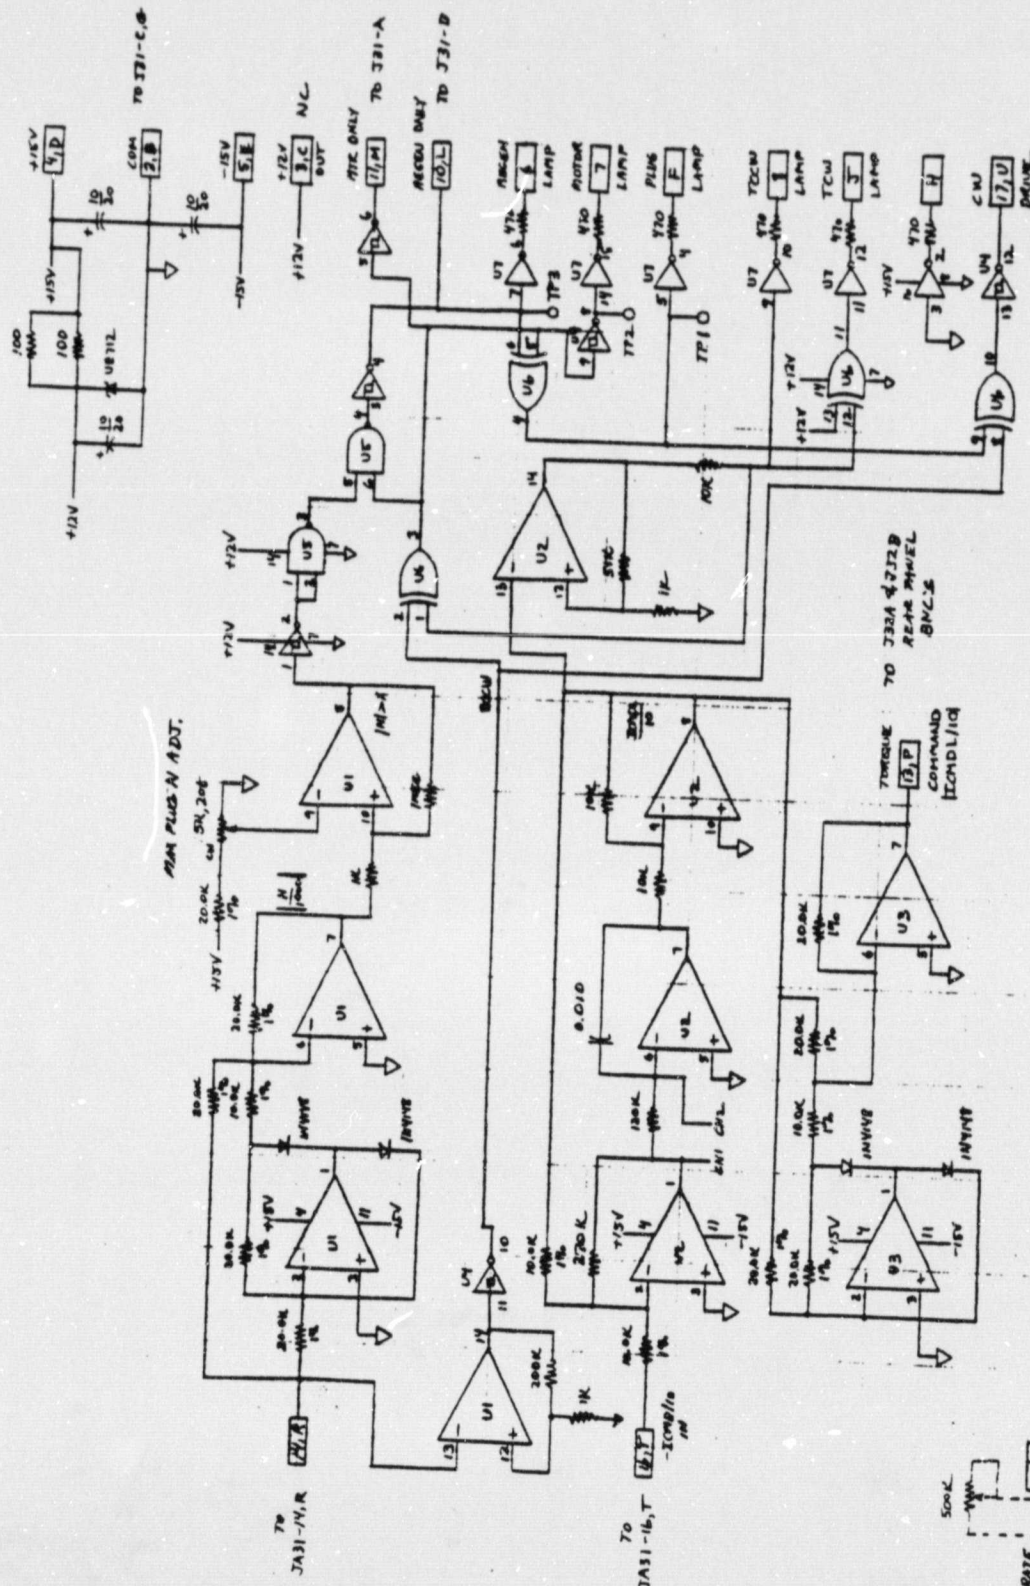

TEST POINTS:
 TP1 PLUS MODE
 TP2 MOTOR MODE
 TP3 REAR MODE
 MODE IS TRUE WHEN
 TP IS AT +12V

NOTE: MOUNT U1, U2 AND U3 WITH SOCKETS
 NOTE B: ALL 1/2% RESISTORS RNCST; OTHERS 1/4W, 5%
 NOTE A: ALL CAP VALUES IN uF UNLESS INDICATED OTHERWISE


REV = 2.0 B 01/17/79

U1, U2, U3 LM348N
 U4 741C
 U5 4011B
 U6 4010B
 U7 4049B

DATE: 01/17/79		DRAWN: J. H. B.		CHECKED: J. H. B.	
DESIGNED: J. H. B.		TESTED: J. H. B.		APPROVED: J. H. B.	
PROJECT: SK002089		SUBJECT: SERVO MOTOR		PAGE: 1 OF 1	
REVISION: 2.0		REASON: B		DATE: 01/17/79	



KCB A

POSITIVE SIDE 12V ISOLATED POWER SUPPLIES

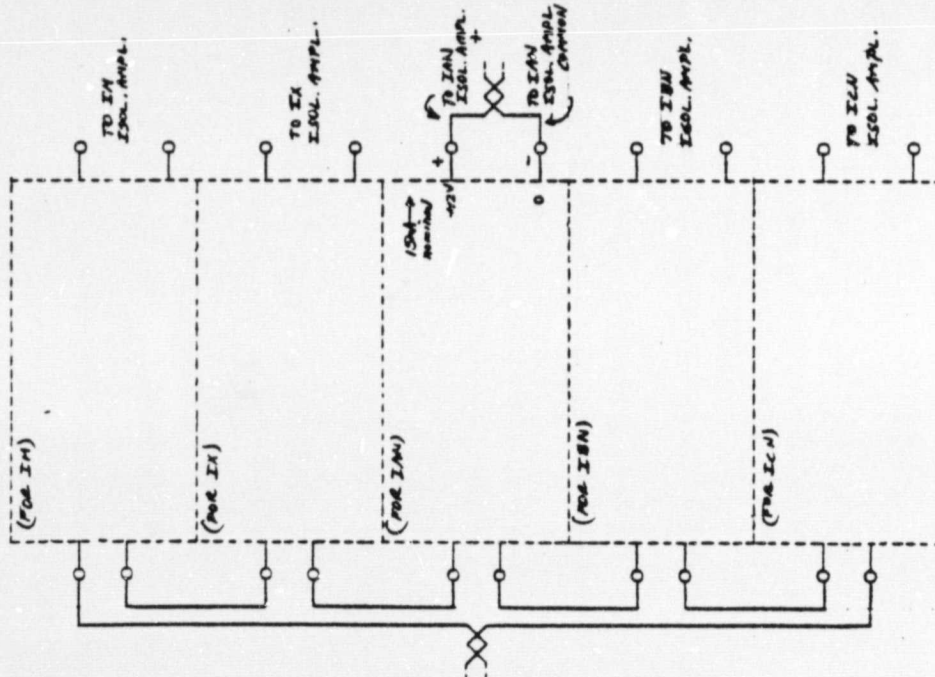

KCB B

NEGATIVE SIDE 12V ISOLATED POWER SUPPLIES

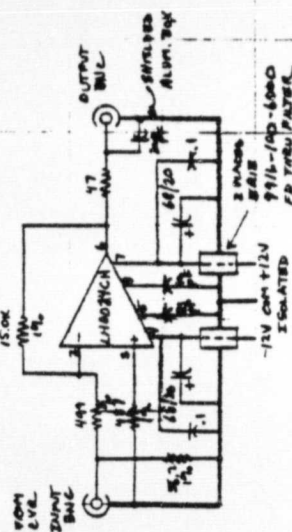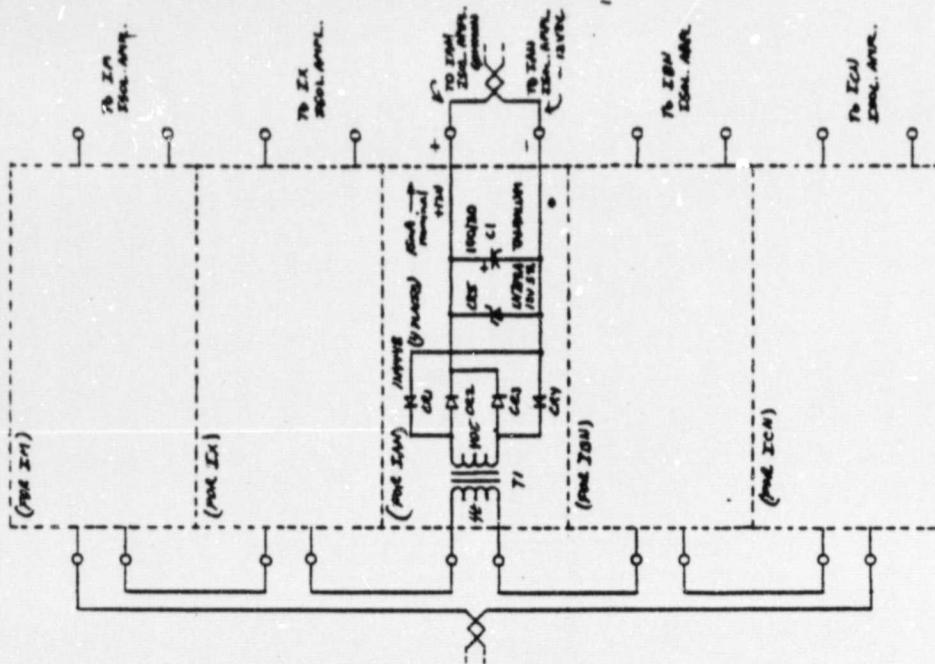

T1, CONE, D.D. CENTRAL F435-43-06
MRE = 26 KVAHRE 4 TURNS
SEC = 30 MPT - 4% TURNS

LH0024CH, NATIONAL SEMI

REV A G.N.B. 01/17/79

REVISIONS		DATE		BY	
1	INITIALS	DATE	BY	DATE	BY
1	13180	SK002090	A		
DESCRIPTION		13180 SK002090			
1. INITIALS		DATE			
2. DATE		BY			
3. BY		DATE			
4. DATE		BY			
5. BY		DATE			
6. DATE		BY			
7. BY		DATE			
8. DATE		BY			
9. BY		DATE			
10. DATE		BY			
11. BY		DATE			
12. DATE		BY			
13. BY		DATE			
14. DATE		BY			
15. BY		DATE			
16. DATE		BY			
17. BY		DATE			
18. DATE		BY			
19. BY		DATE			
20. DATE		BY			
21. BY		DATE			
22. DATE		BY			
23. BY		DATE			
24. DATE		BY			
25. BY		DATE			
26. DATE		BY			
27. BY		DATE			
28. DATE		BY			
29. BY		DATE			
30. DATE		BY			
31. BY		DATE			
32. DATE		BY			
33. BY		DATE			
34. DATE		BY			
35. BY		DATE			
36. DATE		BY			
37. BY		DATE			
38. DATE		BY			
39. BY		DATE			
40. DATE		BY			
41. BY		DATE			
42. DATE		BY			
43. BY		DATE			
44. DATE		BY			
45. BY		DATE			
46. DATE		BY			
47. BY		DATE			
48. DATE		BY			
49. BY		DATE			
50. DATE		BY			
51. BY		DATE			
52. DATE		BY			
53. BY		DATE			
54. DATE		BY			
55. BY		DATE			
56. DATE		BY			
57. BY		DATE			
58. DATE		BY			
59. BY		DATE			
60. DATE		BY			
61. BY		DATE			
62. DATE		BY			
63. BY		DATE			
64. DATE		BY			
65. BY		DATE			
66. DATE		BY			
67. BY		DATE			
68. DATE		BY			
69. BY		DATE			
70. DATE		BY			
71. BY		DATE			
72. DATE		BY			
73. BY		DATE			
74. DATE		BY			
75. BY		DATE			
76. DATE		BY			
77. BY		DATE			
78. DATE		BY			
79. BY		DATE			
80. DATE		BY			
81. BY		DATE			
82. DATE		BY			
83. BY		DATE			
84. DATE		BY			
85. BY		DATE			
86. DATE		BY			
87. BY		DATE			
88. DATE		BY			
89. BY		DATE			
90. DATE		BY			
91. BY		DATE			
92. DATE		BY			
93. BY		DATE			
94. DATE		BY			
95. BY		DATE			
96. DATE		BY			
97. BY		DATE			
98. DATE		BY			
99. BY		DATE			
100. DATE		BY			

ORIGINAL PAGE IS
OF POOR QUALITY